


HYDAC

INTERNATIONAL

**Accumulator Technology.
Product Catalogue.**

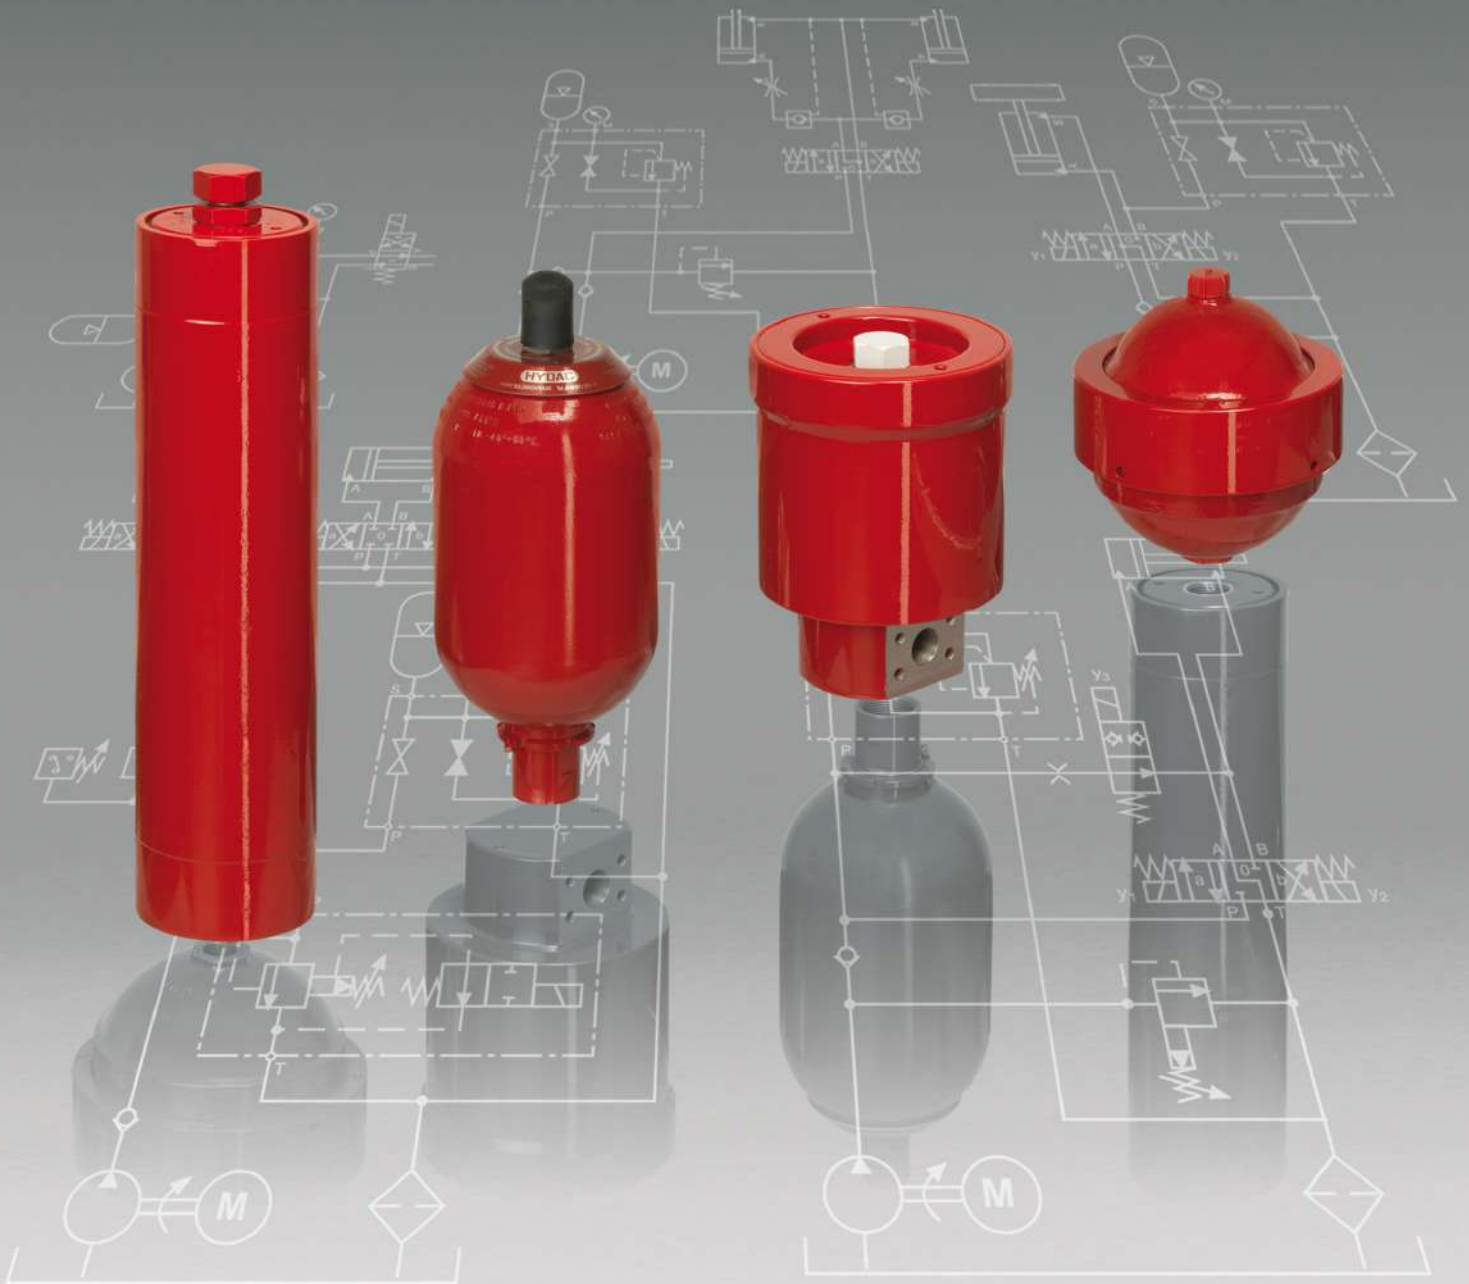

HYDAC Accumulator Technology. Product Catalogue.

1. HYDAC ACCUMULATOR TECHNOLOGY FLUID ENGINEERING EFFICIENCY VIA ENERGY MANAGEMENT.

HYDAC Accumulator Technology has many years' experience in the research & development, design and production of hydraulic accumulators.

All of HYDAC'S bladder, piston, diaphragm and metal bellows accumulators are part of an unbeatable product range which supports hydraulic systems in almost all sectors at a component or unit level.

The main applications of our accumulators are:

- Energy storage
- Emergency and safety functions
- Damping of vibrations, fluctuations, pulsations (pulsation dampers), shocks (shock absorbers) and noise (silencers)
- Suction flow stabilisation
- Media separation
- Volume and leakage oil adjustment
- Weight equalisation
- Energy recovery

Accumulators improve the performance of the entire system. Here are some of their advantages in more detail:

- Improved functions
- Increased service lives
- Reductions in operating and maintenance costs
- Reductions in pulsations and noise

On the one hand, this means greater safety and comfort for the operator and the machine.

On the other hand, HYDAC accumulators enable efficient working in all applications.

Basic criteria, such as the:

- Design pressure,
- Design temperature,
- Fluid displacement volume,
- Discharge / charging velocity,
- Fluid,
- Acceptance specifications and
- Mounting options

are all important parameters which enable the correct accumulator size to be chosen.

Our accumulator specialists will also use their technical expertise to help you select the right type of accumulator. The comprehensive range of HYDAC accessories simplifies installation and maintenance according to the specification.



2. QUALITY

Quality, safety and reliability are paramount for all HYDAC accumulator components.

They comply with the current regulations (or standards) for pressure vessels in the individual countries of installation.

HYDAC customers can therefore be assured to receive a high-quality accumulator product which can be used in every country in the world, depending on the certification.

For more details, please turn to section 4.

All the processes involved, from development, engineering and production to approval and delivery are defined by HYDAC's certified management system and the relevant international accreditation for the manufacture of pressure vessels.

In conjunction with the customer service department at HYDAC's headquarters, service is possible worldwide.

HYDAC's worldwide distributor network means that trained staff are close at hand to help our customers.

This ensures that HYDAC customers have the support of an experienced workforce both before and after sale.

CONTENTS		Page	Catalogue section	Page
1.	HYDAC ACCUMULATOR TECHNOLOGY	2	EN 3.000	2
2.	QUALITY	2		
3.	SAFETY INFORMATION	4		
4.	REGULATIONS	5		
5.	PRODUCT OVERVIEW	6 – 8		
5.1.	BLADDER ACCUMULATORS			
5.1.1	Low pressure		EN 3.202	19
5.1.2	Standard design		EN 3.201	31
5.1.3	High pressure		EN 3.203	41
5.2.	PISTON ACCUMULATORS			
5.2.1	Standard design		EN 3.301	47
5.2.2	Series SK280		EN 3.303	57
5.2.3	High pressure		EN 3.302	61
5.3.	DIAPHRAGM ACCUMULATORS		EN 3.100	67
5.4.	METAL BELLOWS ACCUMULATORS		EN 3.304	75
5.5.	HYDRAULIC DAMPERS		EN 3.701	81
5.6.	SPECIAL ACCUMULATORS			
5.7.	ACCUMULATOR STATIONS		EN 3.653	101
5.8.	ACCUMULATOR ACCESSORIES			
5.8.1	Hydraulic accumulators with back-up nitrogen bottles		EN 3.553	107
5.8.2	Charging and testing unit		EN 3.501	115
5.8.3	Safety and shut-off block		EN 3.551	129
5.8.4	Safety equipment for accumulators		EN 3.552	155
5.8.5	Mounting elements for hydraulic accumulators		EN 3.502	165
5.8.6	ACCUSET SB		EN 3.503	175
6.	INDUSTRIES AND APPLICATIONS	9 – 10		
7. / 8.	WEBSITE / SPECIFICATION FORMS	10 – 16		
9.	SIZING	17 – 18		
10.	NOTE	18		

3. SAFETY INFORMATION

Hydraulic accumulators are closed vessels that are designed and built to hold pressurised fluids. They are charged with nitrogen which is separated from the fluid section by a piston, bladder or diaphragm. Hydraulic accumulators are specifically designed to store and then discharge pressurised fluids.

The regulations for the commissioning and operating of hydraulic accumulators which are in force at the place of installation must be observed. The plant operator is solely responsible for ensuring compliance with these regulations.

Relevant instructions are provided in the operating instructions for our products.

Manufacturers of hydraulic accumulators and products with hydraulic accumulators must observe the following principles:

- Removal or reduction of risks, insofar as this is reasonably possible
- Implementation of appropriate protective measures against risks which cannot be eliminated
- If required, user training regarding any residual risks and the appropriate special measures for reducing these risks during installation and/or operation.

For safe handling and operation, the operator must draw up a risk assessment for the installation site which focuses on the interaction with other components and risks.

The measures which result from this risk assessment must be implemented accordingly.

In the case of fundamental risks affecting hydraulic accumulators, e.g.

- Excessive pressures
- Increases in temperature (in the event of fire)

we already have the relevant products available.

On no account must any welding, soldering or mechanical work be carried out on the accumulator. After the hydraulic line has been connected, it must be completely vented. Work on systems with hydraulic accumulators (repairs, connecting pressure gauges etc.) must only be carried out once the fluid pressure has been released.

3.1. RISK OF EXCESSIVE PRESSURE

Products:

Safety and shut-off block for the fluid side in various sizes and designs.

See catalogue section:

- SAF/DSV safety and shut-off block No. 3.551

Gas safety valve and gas safety block for the gas side

Burst discs for gas and fluid sides

See catalogue section:

- Safety equipment for hydraulic accumulators No. 3.552

3.2. RISK OF RISE IN TEMPERATURE

Products:

Safety and Shut-off Block with solenoid-operated valve (open when de-energised) in conjunction with temperature monitoring.

See catalogue section:

- SAF/DSV safety and shut-off block No. 3.551 or on request

Temperature fuses

See catalogue section:

- Safety equipment for hydraulic accumulators No. 3.552



4. REGULATIONS

4.1. EUROPEAN PRESSURE EQUIPMENT DIRECTIVE (PED)

The European Directive 2014/68/EU came into effect in July 2016. It replaces Directive 97/23/EC and governs the design, fabrication, conformity assessment and placing on the market of pressure equipment and assemblies with a maximum permitted pressure of more than 0.5 bar. It guarantees free movement of goods within the European Community. The EU member states are not permitted to prohibit, restrict or hinder pressure equipment being placed on the market and put into service on the basis of pressure-related risks, provided that the equipment in question meets the requirements of the European Pressure Equipment Directive, has undergone a conformity assessment and is labelled with a CE marking.

Hydraulic accumulators with a capacity of $V \leq 1 \text{ l}$ and a maximum permitted pressure $PS \leq 1000 \text{ bar}$ or a pressure capacity $PS \cdot V \leq 50 \text{ bar} \cdot \text{l}$ for gases of fluid group 2 (non-hazardous fluids) are subject to Article 4, section 3 of the European Pressure Equipment Directive and do not receive the CE marking.

Inspection, installation, operational safety and repeat testing of equipment are controlled as before by national laws.

The equipment relating to safety is described in AD2000, ISO 4126 and EN 14359.

The repeat testing intervals are stipulated in the new German industrial health and safety regulations.

4.2. OTHER REGULATIONS

Pressure accumulators which are installed overseas (outside the EU) are supplied with the relevant test certificates required in the country of installation.

HYDAC pressure vessels can be supplied with virtually any test certificate.

Depending on the authority, different material requirements must be observed

Details of some selected approvals are as follows:

4.2.1 CERTIFICATE CODE = S (ASME)

Since 1985, HYDAC Technology GmbH has been authorised to label pressure equipment that has been manufactured in compliance with the ASME regulations with the "ASME" certification mark.



Such pressure equipment may be placed on the market in the jurisdiction (application area) of the National Board of Boiler and Pressure Vessel Inspectors.

4.2.2 CERTIFICATE CODE = P (KHK certificate)

For the Japanese market, HYDAC Technology GmbH has had approval as a "Self Inspecting Manufacturer" since the year 2000. Consequently, HYDAC is authorised to manufacture and test pressure vessels for the Japanese market and to import them into Japan.

4.2.3 CERTIFICATE CODE = A9 (MANUFACTURER LICENSING CHINA)

Since 1998 HYDAC Technology GmbH has had approval from the Chinese authority "SELO" as a manufacturer of pressure vessels and valves.

4.2.4 CERTIFICATE CODE = A11 (KGS code)

Since concluding the registration procedure in 2012, HYDAC Technology GmbH is authorised to supply pressure vessels and safety equipment according to the Korean Gas Safety (KGS) Code for Korea.

4.2.5 CERTIFICATE CODE = A6 (TR-CU)

Since 2014, the TR-CU 032/2013 regulation (technical regulation of the customs union "on the safety of pressure equipment") has applied for the countries of the Eurasian Economic Community.

HYDAC Technology GmbH has been certified in accordance with the regulation to supply its product range.

4.3. CERTIFICATE TABLE

The following table lists the codes recommended for use in the model code for different countries of installation.

The country of installation must be stated at the time of ordering (see code in Model Code for the particular product: Certificate Code).

Countries not included in the list may be possible on request. Alternative test certificates and differing values may also be possible on request.

European member states and EFTA states	Certificate code (CC)
Austria	
Belgium	
Bulgaria	
Cyprus	
Czech Republic	
Denmark	
Estonia	
Finland	
France	
Germany	
Great Britain	
Greece	
Hungary	
Iceland	
Ireland	
Italy	U
Latvia	
Lithuania	
Luxembourg	
Malta	
Netherlands	
Norway	
Poland	
Portugal	
Romania	
Slovakia	
Slovenia	
Spain	
Sweden	
Switzerland	

A selection of other countries	Certificate code (CC)
Australia	F ¹⁾
Belarus	A6
Canada	S1 ¹⁾
China	A9
Hong Kong	A9
Japan	P
Korea (Republic)	A11
New Zealand	T
Russia	A6
South Africa	S2
Turkey	U
Ukraine	A10
USA	S

¹⁾ Registration required in the individual territories or provinces

Others on request.

4.4. TRANSPORT REGULATIONS FOR PRESSURE VESSELS

The transport of gas-filled hydraulic accumulators must be carried out with the utmost care and in compliance with all relevant transport safety regulations (e.g. on public roads, dangerous goods regulations, etc.).

The operating instructions must be observed!

5. PRODUCT OVERVIEW

The following overview shows the standard product range of HYDAC hydraulic accumulators. For other models and sizes, please contact us.

5.1. BLADDER ACCUMULATORS



5.1.1 Low pressure
Permitted operating pressure:
up to 40 bar

Nominal volume:
2.5 ... 450 l



5.1.2 Standard design
Permitted operating pressure:
up to 550 bar
Nominal volume:
0.5 ... 200 l



5.1.3 High pressure
Permitted operating pressure:
up to 1000 bar
Nominal volume:
1 ... 50 l
Other volumes on request

Advantages of HYDAC bladder accumulators:

- High discharge speeds
- No pressure difference between fluid side and gas side
- Compact, low-maintenance
- High charge and discharge frequencies

5.2. PISTON ACCUMULATORS



5.2.1 Standard design
Permitted operating pressure:
210 ... 350 bar
Nominal volume:
up to 3300 l



5.2.2 Series SK280
Permitted operating pressure:
280 bar
Nominal volume:
0.16 ... 15 l
Other volumes on request



5.2.3 High pressure
Permitted operating pressure:
up to 1000 bar
Nominal volume:
up to 50 l

Advantages of HYDAC piston accumulators:

- Minimal pressure difference between fluid side and gas side
- Large effective volumes
- Variable installation positions
- Monitoring of the piston position is possible using a variety of systems
- Particularly suitable for back-up configurations
- Extreme flow rates
- No sudden discharge of gas when seals are worn

5.3. DIAPHRAGM ACCUMULATORS



5.3.1 Diaphragm accumulators
Weld and screw type
Permitted operating pressure:
up to 750 bar
Nominal volume:
up to 4 l

Advantages of HYDAC diaphragm accumulators:

- Function-optimised and weight-optimised design
- Unlimited choice of installation positions
- No pressure difference between fluid side and gas side
- Low-maintenance and long service life

5.4. METAL BELLOWS ACCUMULATORS



5.4.1 Metal bellows accumulators

Please contact us

Advantages of the HYDAC metal bellows accumulator:

- Durable
- Wear-free
- Media resistance over a wide range of temperatures

See also flyer:

- Heavy diesel engines - Metal bellows accumulators No. 10.129.1

5.5. HYDRAULIC DAMPERS



5.5.1 Dampers

Permitted operating pressure: 10 ... 1000 bar

Nominal volume: 0.075 ... 450 L

Advantages of the HYDAC hydraulic damper:

- Reduces pressure pulsations
- Improves the suction performance of displacement pumps
- Prevents pipe breaks and damage to valves
- Protects measuring equipment and its function in the system
- Reduces noise level in hydraulic systems
- Lowering of servicing and maintenance costs
- Increase in service life of the system



5.5.2 Silencers

Permitted operating pressure: 330 bar

Others on request

5.6. SPECIAL ACCUMULATORS



5.6.1 Weight-reduced accumulators

Over 80 % reduction in weight compared to equivalent carbon steel accumulators.

The selection ranges from weight-optimised accumulators, e.g. by using aluminium, through to light-weight and ultra light-weight accumulators.

See also flyer:

- Weight-reduced accumulators No. 3.305



5.6.2 Spring accumulators

Fitted with a spring.

The energy is produced by the spring force, instead of gas.

Further information on request.

Advantages of the HYDAC spring accumulator:

- No gas losses
- Linear p-V characteristic curve
- Functionality is independent of temperature influences

5.7. ACCUMULATOR STATIONS



HYDAC supplies fully assembled accumulator stations which are ready for operation, complete with all the necessary valve controls, pipe fittings and safety devices

- as an individual accumulator unit or
- in a back-up version with nitrogen bottles to increase the effective volume.

5.8. ACCUMULATOR ACCESSORIES



5.8.1 Hydraulic accumulators with back-up nitrogen bottles

HYDAC also offers nitrogen bottles which can be used to back up bladder and piston accumulators. Nitrogen bottles used as back-ups increase the gas volume in the accumulator.



5.8.2 FPU Charging and testing unit

Charging hose, pressure gauge and pressure reducer for HYDAC and other brands of accumulator, up to 800 bar pre-charge pressure – higher pressures on request.



5.8.3 SAF/DSV Safety and shut-off block

Nominal size:
8 ... 50

Permitted operating pressure:
800 bar


Fluid-side protection, pressure relief valve, unloading to tank and separation of the accumulator from the fluid-side system.



5.8.4 Safety devices

- GSV6 gas safety valve
- Temperature fuse
- Burst disc
- Gas safety block

All of the above are safety equipment for HYDAC accumulator products.



5.8.5 Monitoring systems for hydraulic accumulators

- Bladder integrity system
- Piston position monitoring systems
- Pre-charge pressure monitoring



5.8.6 Mounting elements for hydraulic accumulators

Accumulator mounting sets, clamps and consoles for efficient installation of hydraulic accumulators.



5.8.7 ACCUSET SB

Permitted operating pressure:
330 bar

Nominal volume:
1 ... 50 l

Advantages of using HYDAC nitrogen bottles:

- Inexpensive increase of accumulator volume
- This leads to smaller accumulators with the same gas volume

Further products related to "charging and testing" are available in the nitrogen charging units (N2 servers) section – see catalogue section:

- Nitrogen charging units N2-Server No. 2.201

Portable, mobile and stationary versions are available.

We are always happy to give advice.

Advantages of the HYDAC safety and shut-off block:

- Minimal space requirements and maintenance costs
- Minimal pipework required (as a rule, 1 SAF replaces up to 10 individual pipe connections)
- Considerable reduction in installation time
- Can be adapted to different types and different brands of accumulator
- Can be adapted to additional valves (pilot-operated check valves, flow control valves, etc.).

Advantages of the HYDAC gas safety block:

- A gas safety block simplifies the operation of the hydraulic accumulator on the gas side and also offers the possibility of installing the above safety equipment using the various ports.

See also flyer:

- Monitoring systems for hydraulic accumulators No. 3.506

Please make use of our online tool **Accu-MOUNT** to help you select the suitable mounting equipment for your hydraulic accumulator

www.hydac.com " Service " Online tools


6. INDUSTRIES AND APPLICATIONS

HYDAC Technology GmbH is represented in almost all industries of the world which use hydraulic accumulators.

The main sectors are industrial hydraulics, mobile technology and process technology.

Further applications in the oil & gas/offshore industry and energy efficient applications involving hydraulic accumulators are gaining in importance.

The following list summarises the ways that accumulators/dampers are typically used in these industries:

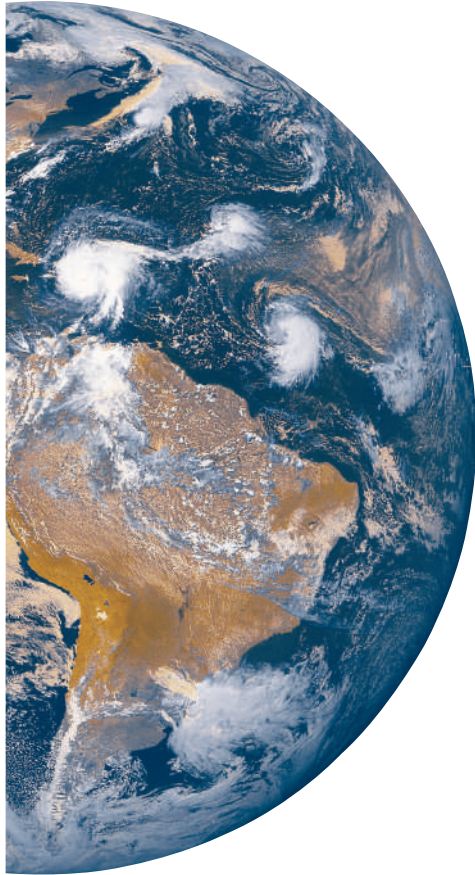

6.1. STATIONARY HYDRAULICS

Automotive industry

- General industrial hydraulics, e.g. energy storage

Mining machinery

- Hydraulic accumulators, e.g. in suspended monorails
- Pulsation damping
- Comfort and safety for mobile working machines

Iron and steel industry

- Accumulator to maintain the pressure in rolling mills
- Blast furnace hydraulics

Plastics machinery

- Accumulator stations for energy storage during the injection moulding process
- Pulsation damping on the hydraulic drive

Paper industry

- Energy storage for emergency functions in friction bearing hydraulics
- Energy storage in high/low pressure power units

Test rigs and test systems

- Energy storage on crash test systems
- Pulsation damping on servo hydraulic axes

Thermal power plants

- Emergency supply for turbine control system
- Pulsation damping on pumps
- Lubrication, control and seal oil supply

Forming machines

- Hydraulic accumulators used to store energy to support the pump

Machine tools

- Support for the hydraulics for tool drive or tool change
- Energy storage in the compact hydraulics of machining centres

Wind turbines

- Hydraulic accumulators in the pitch control system
- Support of the pitch drive
- Accumulators on braking units

6.2. MOBILE TECHNOLOGY

Automotive technology

- Automatic and manual transmission
- Automatic clutch systems
- Engine management systems
- Accumulators for turbocharger emergency lubrication



Construction machines

- Accumulators in braking systems
- Chassis damping
- Bucket damping
- Boom damping on mobile cranes



Agricultural and forestry machines

- Front loader damping
- Accumulators in tractor suspension systems
- Stone strike protection for ploughs
- Boom suspension on field sprayers



Municipal machines

- Energy storage
- Boom damping
- Pulsation dampers
- Chassis damping



Lifting & material handling technology

- Noise damping
- Energy recovery
- Braking systems



Shipping

- Water treatment plants (pump support)
- Pulsation damping on diesel engines
- Heave compensation (cranes)
- Emergency function for lifeboats



6.3. PROCESS TECHNOLOGY

Chemical industry

- Energy storage and pulsation damping on dosing pumps
- Suction flow stabilisation on the suction side of pumps



Loading stations / refineries

- Shock absorption for valve closing
- Pulsation damping on piping




Offshore / Oil & Gas

- Accumulators to support valve closing systems
- Energy storage for deep sea rams
- Blow Out Preventers (BOP)
- Emergency function for safety systems
- Accumulators on wellhead control systems



Pipeline construction

- Energy storage for emergency actuation of valve stations
- Compressor stations



7. WEBSITE

Please visit us at the following address:
www.hydac.com.

In addition to industries, services and fluid engineering, you will find the standard product range and the comprehensive range of HYDAC accessories at **Products » Hydraulic Accumulators**

Under Downloads you will find this product catalogue in different languages in PDF format as well as other information on HYDAC accumulator products (e.g. operating, installation and repair instructions).

You can find the required product via the product search tab and download the relevant CAD model.

Our online tool **ASPlight** facilitates quick and simple input, calculation and evaluation of the required accumulator parameters – see section 9.3.

Further tools, such as the **p₀-calculator** or **Accu-MOUNT**, can also be found at the same location.

8. SPECIFICATION FORM

Our aim is to provide optimal customer service both before and after the accumulator is purchased.

The following specification forms are designed to help pre-select the required accumulator/damper or accessories.

The specification forms are available in PDF format from the download section under **Products » Hydraulic Accumulators**.

The areas highlighted in green constitute the minimum information required for a response or calculation.

GENERAL ACCUMULATOR SPECIFICATION FORM (Page 1/2)

(Subject to technical modifications, **mandatory field**)

Company:	<input type="text"/>	Location:	<input type="text"/>
Surname, first name:	<input type="text"/>	Project name:	<input type="text"/>
E-mail:	<input type="text"/>	Requirement:	<input type="text"/> pieces/year
Telephone no.:	<input type="text"/>	as	<input type="checkbox"/> spare part <input type="checkbox"/> original equipment

Accumulator type

- Bladder accumulator
- Piston accumulator
- Diaphragm accumulator
- Metal bellows accumulator
- _____

System data

Operating pressure

Min. bar Max. bar

Pre-charge pressure at 20 °C (nitrogen) ¹⁾
 bar

Ambient temperature

Min. °C Max. °C

Operating temperature

Min. °C Max. °C

Complete cycle time

s

Material of the accumulator ²⁾

Accumulator shell

Fluid port

Elastomer

Remarks:

Spare parts/accessories are available at www.hydac.com " Products " Hydraulic accumulators

Fluids/medium

Fluid

Density

Min. °C kg/m²

Max. °C kg/m²

Viscosity at 20 °C

cSt

Viscosity at operating temperature

cSt

Additional information

Installation dimensions (height x Øa)

mm

Fluid port

Flange

Thread

Gas port

M28x1.5 7/8-14UNF

Coating/finish

Internal

External

Further information

Industry

Country of installation

Approval

Specification

Fluid demand diagram

- ONE pump and ONE consumer

Accumulator discharge rate

l/min

Accumulator discharge time

s

Flow rate of the pump

l/min

- Pump runs continuously

- Pump starts after discharge

- SEVERAL pumps and/or consumers (see sheet 2, incl. example)

¹⁾ See catalogue section No. 3.000, section on sizing

²⁾ Dependent on operating temperature and/or fluid resistance

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

e-mail: speichertechnik@hydac.com

GENERAL ACCUMULATOR SPECIFICATION FORM (Page 2/2)

(Subject to technical modifications, [mandatory field](#))

Fluid demand diagram for several pumps and/or consumers:

Q_v = Consumer flow rate [l/s]
 E_v = Switch-on time of consumer [s]
 A_v = Switch-off time of consumer [s]
 E_p = Switch-on time of pump [s]
 A_p = Switch-off time of pump [s]

Number of consumers _____

Q_{v1} = _____ E_{v1} = _____ A_{v1} = _____

Q_{v2} = _____ E_{v2} = _____ A_{v2} = _____

Q_{v3} = _____ E_{v3} = _____ A_{v3} = _____

Q_{v4} = _____ E_{v4} = _____ A_{v4} = _____

Number of pumps _____

Q_{p1} = _____ E_{p1} = _____ A_{p1} = _____


Q_{p2} = _____ E_{p2} = _____ A_{p2} = _____

Q_{p3} = _____ E_{p3} = _____ A_{p3} = _____

Q_{p4} = _____ E_{p4} = _____ A_{p4} = _____



Example

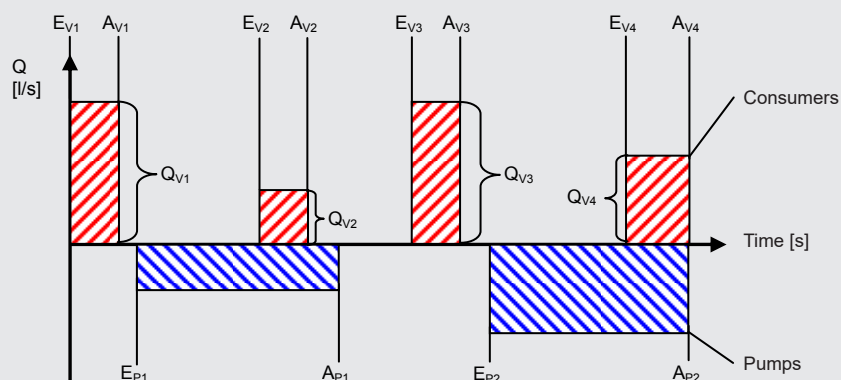

HYDAC Technology GmbH

Industriegebiet
66280 Sulzbach/Saar, Germany
 Tel.: +49 (0) 68 97 / 509 - 01
 Fax: +49 (0) 68 97 / 509 - 464
 Internet: www.hydac.com
 e-mail: speichertechnik@hydac.com

SHOCK ABSORBER SPECIFICATION FORM (sheet 1/2)

(Subject to technical modifications, **mandatory field**)

Company:	<input type="text"/>	Location:	<input type="text"/>
Surname, first name:	<input type="text"/>	Project name:	<input type="text"/>
E-mail:	<input type="text"/>	Requirement:	<input type="text"/> pieces/year
Telephone no.:	<input type="text"/>	as	<input type="checkbox"/> spare part <input type="checkbox"/> original equipment

Accumulator type

- Bladder accumulator
- Piston accumulator
- Diaphragm accumulator
- Metal bellows accumulator
- _____

System data

Operating pressure
Min. bar Max. bar

Pre-charge pressure at 20 °C (nitrogen) ¹⁾
 bar

Ambient temperature
Min. °C Max. °C

Operating temperature
Min. °C Max. °C

Complete cycle time
 s

Material of the accumulator ²⁾

Accumulator shell

Fluid port

Elastomer

Remarks:

Fluids/medium

Fluid

Density
Min. °C kg/m²
Max. °C kg/m²

Viscosity at 20 °C
 cSt

Viscosity at operating temperature
 cSt

Additional information

Installation dimensions (height x Øa)
 mm

Fluid port
 Flange
 Thread

Gas port
 M28x1.5 7/8-14UNF

Coating/finish
 Internal
 External

¹⁾ See catalogue section No. 3.000, section on sizing

²⁾ Dependent on operating temperature and/or fluid resistance

Further information

Industry

Country of installation

Approval

Specification

Pump data

Zero-delivery head
 m

Pressure of the pump at the operating point
 bar

Flow rate of the pump at the operating point
 l/min

Cause of the pressure shock

- When pump starts
- When pump switches off
- When check valves close
- _____

Pipe data

Please provide pipe data on the next page.

SHOCK ABSORBER SPECIFICATION FORM (sheet 2/2)

(Subject to technical modifications, **mandatory field**)

General pipe data

Material of pipe Total closing time of the valve s
 Max. permitted pressure of the pipe bar Speed of sound in the system m/s


Information on pipe sections

L = Length of the pipe [m]
 D_i = Internal diameter of the pipe [mm]
 S = Wall thickness of pipe [mm]
 H = Zero head of the pump [m]
 T = Closing time of the valve [s] (effectively roughly 30 % of the total closing time)

Number of different pipes _____

L1 = _____ m	D_{i1} = _____ mm	S1 = _____ mm	L4 = _____ m	D_{i4} = _____ mm	S4 = _____ mm
L2 = _____ m	D_{i2} = _____ mm	S2 = _____ mm	L5 = _____ m	D_{i5} = _____ mm	S5 = _____ mm
L3 = _____ m	D_{i3} = _____ mm	S3 = _____ mm	L6 = _____ m	D_{i6} = _____ mm	S6 = _____ mm

Example

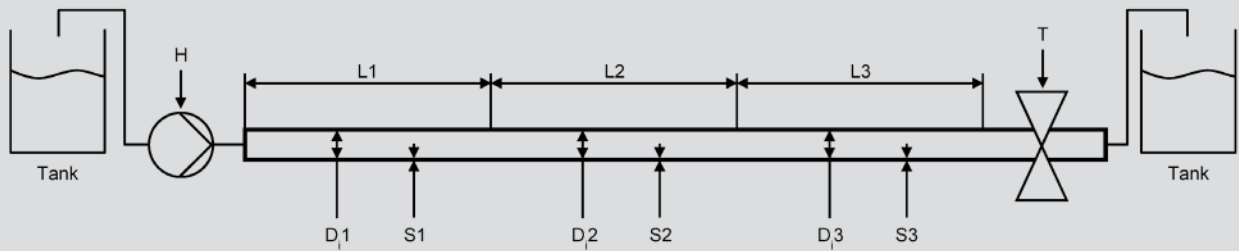

HYDAC Technology GmbH

Industriegebiet
66280 Sulzbach/Saar, Germany
 Tel.: +49 (0) 68 97 / 509 - 01
 Fax: +49 (0) 68 97 / 509 - 464
 Internet: www.hydac.com
 e-mail: speichertechnik@hydac.com

PULSATION DAMPER SPECIFICATION FORM

(Subject to technical modifications, **mandatory field**)

Company:	<input type="text"/>	Location:	<input type="text"/>
Surname, first name:	<input type="text"/>	Project name:	<input type="text"/>
E-mail:	<input type="text"/>	Requirement:	<input type="text"/> pieces/year
Telephone no.:	<input type="text"/>	as	<input type="checkbox"/> spare part <input type="checkbox"/> original equipment

Accumulator type

- Bladder accumulator
- Piston accumulator
- Diaphragm accumulator
- Metal bellows accumulator
- _____

System data

Operating pressure
Min. bar Max. bar

Pre-charge pressure at 20 °C (nitrogen) ¹⁾
 bar

Ambient temperature
Min. °C Max. °C

Operating temperature
Min. °C Max. °C

Complete cycle time
 s

Material of the accumulator ²⁾

Accumulator shell

Fluid port

Elastomer

Remarks:

Spare parts/accessories are available at www.hydac.com " Products " Hydraulic accumulators

Fluids/medium

Fluid

Density
Min. °C kg/m²
Max. °C kg/m²

Viscosity at 20 °C
 cSt

Viscosity at operating temperature
 cSt

Additional information

Installation dimensions (height x Øa)
 mm

Fluid port
 Flange
 Thread

Gas port
 M28x1.5 7/8-14UNF

Coating/finish
 Internal
 External

Application
 pressure side suction side

Required residual pulsation %

Result l gas volume

Further information

Industry

Country of installation

Approval

Specification

Pump and system data

Operating/pump pressure
 bar

Flow rate
 l/min

Rotational speed
 1/min

No. of displacement elements
 single double acting

Pump factor optional

Stroke volume
for piston pump
d = Ø piston mm
H = stroke length mm
for diaphragm pumps,
see manufacturer's specifications

¹⁾ See catalogue section No. 3.000, section on sizing

²⁾ Dependent on operating temperature and/or fluid resistance

HYDAC Technology GmbH

Industriegebiet
66280 Sulzbach/Saar, Germany
Tel.: +49 (0) 68 97 / 509 - 01
Fax: +49 (0) 68 97 / 509 - 464
Internet: www.hydac.com
e-mail: speichertechnik@hydac.com

VOLUME COMPENSATION SPECIFICATION FORM

(Subject to technical modifications, **mandatory field**)

Company:	<input type="text"/>	Location:	<input type="text"/>
Surname, first name:	<input type="text"/>	Project name:	<input type="text"/>
E-mail:	<input type="text"/>	Requirement:	<input type="text"/> pieces/year
Telephone no.:	<input type="text"/>	as	<input type="checkbox"/> spare part <input type="checkbox"/> original equipment

Accumulator type

- Bladder accumulator
- Piston accumulator
- Diaphragm accumulator
- Metal bellows accumulator
- _____

System data

Operating pressure
Min. bar Max. bar

Pre-charge pressure at 20 °C (nitrogen) ¹⁾
 bar

Ambient temperature
Min. °C Max. °C

Operating temperature
Min. °C Max. °C

Temperature rise time
 min

Material of the accumulator ²⁾

Accumulator shell

Fluid port

Elastomer

Remarks:

Spare parts/accessories are available at www.hydac.com " Products " Hydraulic accumulators

Fluids/medium

Fluid

Density
Min. °C kg/m²
Max. °C kg/m²

Viscosity at 20 °C
 cSt

Viscosity at operating temperature
 cSt

Volume expansion coefficient
 1/°C

Additional information

Installation dimensions (height x Øa)
 mm

Fluid port
 Flange
 Thread

Gas port
 M28x1.5 7/8-14UNF

Coating/finish
 Internal
 External

Further information

Industry

Country of installation

Approval

Specification

Pipe data for shut-off system section

Pipe volume
 l

Max. shut-off pressure
 bar

Pipe material

Permitted pressure with accumulator
 bar

Pipe temperature
Min. °C Max. °C

¹⁾ See catalogue section No. 3.000, section on sizing





²⁾ Dependent on operating temperature and/or fluid resistance

HYDAC Technology GmbH

Industriegebiet
66280 Sulzbach/Saar, Germany
Tel.: +49 (0) 68 97 / 509 - 01
Fax: +49 (0) 68 97 / 509 - 464
Internet: www.hydac.com
e-mail: speichertechnik@hydac.com

9. SIZING

9.1. DEFINITION OF VARIABLES FOR SIZING A HYDRAULIC ACCUMULATOR

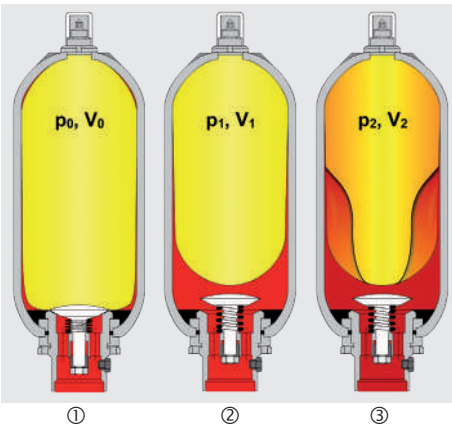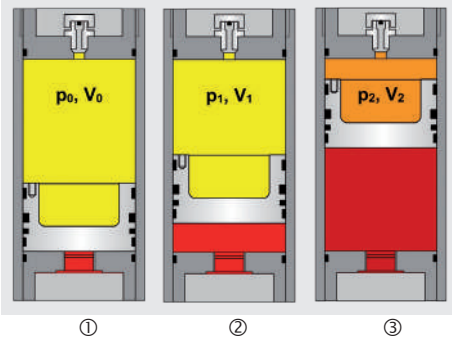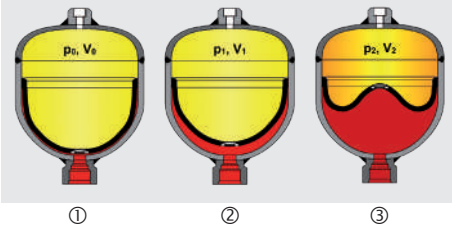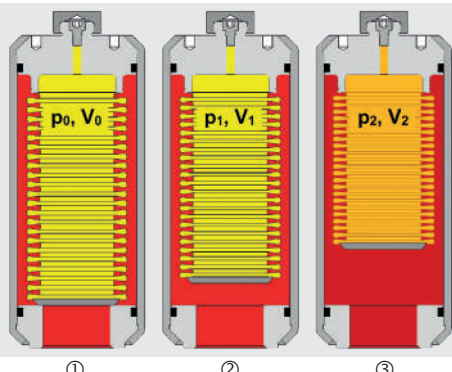Function	Limits for gas pre-charge pressure
<p>Bladder accumulators</p> 	$p_0 \leq 0.9 \cdot p_1$ with a permitted pressure ratio of $p_2 : p_0 \leq 4 : 1$ <p>For HYDAC low pressure accumulators, the following must also be taken into account:</p> Type SB40: $p_{0 \max} = 20 \text{ bar}$ Type SB35H: $p_{0 \max} = 10 \text{ bar}$
<p>Piston accumulators</p> 	$p_{0, \min} \geq 2 \text{ bar}$
<p>Diaphragm accumulators</p> 	a) Permitted pressure ratio: $p_2 : p_0$ <u>Weld type:</u> The pressure ratio of weld-type diaphragm accumulators is between 4 : 1 and 8 : 1, depending on the design – see catalogue section Diaphragm Accumulators, No. 3.100, section 3.1. <u>Screw type:</u> All sizes: 10 : 1 Other pressure ratios on request b) $p_0 \leq 0.9 \cdot p_1$
<p>Metal bellows accumulators (e.g. corrugated bellow version)</p> 	The max. permitted or optimal pre-charge pressure of a metal bellows accumulator (with corrugated or diaphragm bellows) must be determined for each application and each design version by providing information on the particular operating conditions and consulting with HYDAC.

The specified values are maximum values and must not be considered as referring to a prolonged load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid, flow rate and gas losses caused by physical properties.

- ① The accumulator is pre-charged with nitrogen. The separating element (piston, bladder, diaphragm, metal bellows) shuts off the fluid port.
- ② Temperature effects must be taken into account when choosing the minimum operating pressure. The minimum operating pressure must also be higher than the gas pre-charge pressure ($p_1 > p_0$). This should prevent the separation element from striking the fluid port every time fluid is discharged.
- ③ Once the max. operating pressure is reached, the effective volume ΔV is available in the accumulator:

p_0 = pre-charge pressure
 p_1 = minimum operating pressure
 p_2 = maximum operating pressure

V_0 = effective gas volume
 V_1 = gas volume at p_1
 V_2 = gas volume at p_2

t_0 = pre-charge temperature
 t_{\min} = min. operating temperature
 t_{\max} = max. operating temperature

9.2. SELECTING THE PRE-CHARGE PRESSURE

The selection of the pre-charge pressure defines the accumulator capacity. In order to obtain optimum utilisation of the accumulator volume, the following pre-charge pressures are recommended:

9.2.1 Recommended values

For energy storage:

$$p_{0,t \max} = 0.9 \cdot p_1$$

For shock absorption:

$$p_{0,t \max} = 0.6 \text{ to } 0.9 \cdot p_m$$

(p_m = average operating pressure for free flow)

For pulsation damping:

$$p_{0,t \max} = 0.6 \cdot p_m$$

(p_m = average operating pressure)

or

$$p_{0,t \max} = 0.8 \cdot p_1$$

(for several operating pressures)

During operation, the separating element (piston, bladder, diaphragm, corrugated bellows) must not touch the fluid-side connection.

Since the volume of the gas increases as the temperature increases, the pre-charge pressure must be determined at the maximum operating temperature using the recommended values.

9.2.2 Limits for gas pre-charge pressure

See section 9.1.

9.2.3 Temperature effect

So that the recommended pre-charge pressures can be maintained, even at relatively high operating temperatures, the $p_{0 \text{ charge}}$ for charging and testing cold accumulators must be selected as follows:

$$p_{0, t \text{ charge}} = p_{0, t \max} \cdot \frac{t_{\text{charge}} + 273}{t_{\max} + 273}$$

$t_0 = t_{\text{charge}}$ (pre-charge temperature in °C)

To take the temperature influence into account when sizing accumulators, p_0 at t_0 must be selected as follows:

$$p_{0, t \min} = p_{0, t \max} \cdot \frac{t_{\min} + 273}{t_{\max} + 273}$$

9.3. ONLINE TOOLS


The following HYDAC online tools are available at: www.hydac.com " Service " Online tools



9.3.1 ASPlight

ASPlight is an intelligent application which takes real gas behaviour into account. It enables you to calculate all the necessary parameters such as pressure, volume and temperature in different units for gases such as nitrogen or helium. Additional information fields help to evaluate the result and determine the type of accumulator.

ASPlight is aimed at users who need to determine the main accumulator parameters in a short space of time.



9.3.2 p₀-calculator

The **p₀-calculator** is a simple conversion tool for determining the pre-charge pressure (p_0) in the hydraulic accumulator at a specific temperature.

All that is needed is the reference pre-charge pressure and the current temperature of the hydraulic accumulator measured on the gas side.

The **p₀-calculator** takes the real gas behaviour into account. The online tool display is optimised for both smartphones and desktops and is available online around the clock.

The **p₀-calculator** offers reliability for the inspection and any required correction of the accumulator's pre-charge pressure outside of the reference temperature.



9.3.3 Accu-MOUNT

With the **Accu-MOUNT**, the suitable clamps, consoles and accumulator mounting sets can be identified on the basis of the accumulator designation, the part number or its characteristics. These accessories can then be added to the request list.

You can also find links to the corresponding product pages on our website and download 3D models, brochures and other information.

The **Accu-MOUNT** can find the perfect mounting equipment for HYDAC hydraulic accumulators in an instant.

10. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

e-mail: speichertechnik@hydac.com



Bladder Accumulators Low pressure

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas is utilised in hydraulic accumulators for storing fluids. HYDAC bladder accumulators are based on this principle, using nitrogen as the compressible medium.

A bladder accumulator consists of a fluid section and a gas section with the bladder acting as the gas-tight separation element. The fluid around the bladder is connected to the hydraulic circuit so that the bladder accumulator draws in fluid when the pressure increases and the gas is compressed. When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

HYDAC bladder accumulators can be used in a wide variety of applications, some of which are listed below:

- Energy storage
- Emergency operation
- Force equilibrium
- Leakage compensation
- Volume compensation
- Shock absorption
- Vehicle suspension
- Pulsation damping

See catalogue section:

- Hydraulic dampers
No. 3.701

1.2. DESIGN

HYDAC low pressure bladder accumulators consist of a welded pressure vessel, a flexible bladder with gas valve and a hydraulic connection with a perforated disc or check valve.

The table shows the different models which are described in greater detail in the pages that follow:

Designation	Perm. pressure [bar] ²⁾	Volume [l]	Q ¹⁾ [l/s]
SB40- 2.5 ... 50	40	2.5 - 50	7
SB40- 70 ... 220		70 - 220	30
SB35HB- 20 ... 50	35	20 - 50	20
SB16A- 150 ... 450	16	150 - 450	15
SB35A- 150 ... 450	35		
SB16AH- 150 ... 450	16		
SB35AH- 150 ... 450	35		20

¹⁾ Q = max. flow rate of pressure fluid

²⁾ Higher pressures on request

1.3. BLADDER MATERIAL

The bladder material must be selected in accordance with the particular operating medium or operating temperature, see section 2.1.

If discharge conditions are unfavourable (high p_2/p_0 pressure ratio, rapid discharge speed), the gas may cool to below the permitted temperature.

This can cause cold cracking. The gas temperature can be calculated using the HYDAC Accumulator Simulation Program **ASP**.

1.4. CORROSION PROTECTION

For operation with chemically aggressive media, the accumulator shell can be supplied with corrosion protection, such as plastic coating on the inside or chemical nickel-plating. If this is insufficient, then stainless steel hydraulic accumulators must be used.

1.5. INSTALLATION POSITION

HYDAC bladder accumulators can be installed vertically, horizontally and at a slant. When installing vertically or at a slant, the fluid valve must be at the bottom. For certain applications listed below, particular positions are preferable:

- Energy storage:
vertical
- Pulsation damping:
any position from horizontal to vertical
- Maintaining constant pressure:
any position from horizontal to vertical
- Pressure surge damping:
vertical
- Volume compensation:
vertical

If the installation position is horizontal or at a slant, the effective fluid volume and the maximum permitted flow rate of the operating fluid are reduced.

Bladder accumulators SB16A / SB35A and SB16AH / SB35AH must only be installed vertically with the gas side uppermost.

1.6. TYPE OF INSTALLATION

For strong vibrations and volumes above 1 litre, we recommend the use of HYDAC mounting clamps or the HYDAC accumulator mounting set.

See catalogue sections:

- Mounting elements for hydraulic accumulators
No. 3.502
- ACCUSET SB
No. 3.503

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Operating pressure

See section 3. for the particular series (may differ from nominal pressure for foreign test certificates)

2.1.2 Permitted operating temperature of the hydraulic accumulator

-10 °C ... +80 °C

Standard design, others on request

2.1.3 Nominal volume

See section 3. for the particular series

2.1.4 Effective gas volume

See section 3. for the particular series, Based on nominal dimensions, this differs slightly from the nominal volume and must be used when calculating the effective fluid volume.

2.1.5 Effective volume

Volume of fluid which is available between the operating pressures p_2 and p_1 .

2.1.6 Max. flow rate of the operating fluid

In order to achieve the max. flow rate given in the tables, the accumulator must be installed vertically. It must be noted that a residual fluid volume of approx. 10 % of the effective gas volume remains in the accumulator.

The maximum flow rate of the operating fluid was determined under specific typical conditions and is not applicable in all operating conditions.

2.1.7 Working temperature and operating medium

The permitted working temperature of a bladder accumulator is dependent on the application limits of the metal materials and the bladder. Outside this temperature range, special materials must be used. The operating medium must also be taken into account.

The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
		5	-50 °C ... + 50 °C		
		9	-30 °C ... + 80 °C		
ECO	Ethylene oxide epichlorohydrin rubber	3	-30 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the HFB group ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
IIR	Butyl rubber	4	-50 °C ... +100 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
FKM	Fluorine rubber	6	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material code, accumulator bladder

²⁾ Others on request

2.1.8 Gas charging

Hydraulic accumulators must only be charged with nitrogen. Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm). If other gases are to be used, please contact HYDAC for advice.

2.1.9 Limits for gas pre-charge pressure

$$p_0 \leq 0.9 \cdot p_1$$

with a permitted pressure ratio of:

$$p_2 : p_0 \leq 4 : 1$$

p_2 = max. operating pressure

p_0 = pre-charge pressure

For HYDAC low pressure accumulators, the following must also be taken into account:

Type SB40: $p_{0 \max} = 20 \text{ bar}^*$

Type SB16/35A/AH: $p_{0 \max} = 10 \text{ bar}$

Type SB35HB: $p_{0 \max} = 10 \text{ bar}$

* in model with perforated disc

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses due to physical properties.

2.1.10 Certificate codes

Country	Certificate code (CC)
EU member states	U
Australia	F ¹⁾
China	A9
Hong Kong	A9
Iceland	U
Canada	S1 ¹⁾
New Zealand	T
Norway	U
Russia	A6
Switzerland	U
South Africa	S2
Turkey	U
Ukraine	A10
USA	S
Belarus	A6

¹⁾ Registration required in the individual territories or provinces.

Others on request

2.1.11 Notice

All work on HYDAC bladder accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.201.BA

Assembly and repair instructions are available for work which may be carried out on the bladder accumulator after installation and commissioning, e.g. repair work.

No. 3.201.M

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:

www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

**Not all combinations are possible.
Order example. For further information,
please contact HYDAC.**

SB16 A - 150 F 7 / 112 U - 40 A

Series

Type code

No details = standard

H = high flow

N = flow-optimised oil valve

A = shock absorber

B = bladder top-repairable

DA = bladder integrity system, industry version (others on request)

Combinations must be agreed with HYDAC

Nominal volume [l]

Fluid port

A = standard connection, thread with internal seal face

F = flange connection

C = valve mounting with screws on underside

E = sealing surfaces on front interface (e.g. on thread M50x1.5 – valve)

G = external thread

S = special connection, to customer specification

Gas side

1 = standard design

2 = back-up version

3 = gas valve 7/8-14UNF with M8 internal thread

4 = gas valve 5/8-18UNF

5 = gas valve M50x1.5 in accumulators smaller than 50 l

6 = 7/8-14UNF gas valve

7 = M28x1.5 gas valve

8 = M16x1.5 gas valve (with M14x1.5 bore in gas valve)

9 = special gas valve, to customer specification

Material code (MC)

dependent on operating medium

standard design = 112/342 for mineral oils

others on request

Fluid port

1 = carbon steel

2 = high tensile steel

3 = stainless steel²⁾

6 = low temperature steel

Accumulator shell

0 = plastic coated (internally)

1 = carbon steel

2 = chemically nickel-plated (internal coating)

4 = stainless steel²⁾

6 = low temperature steel

Accumulator bladder^{1) 3) 4)}

2 = NBR⁵⁾

3 = ECO

4 = IIR

5 = NBR⁵⁾

6 = FKM

7 = other

9 = NBR⁵⁾

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Connection

Thread, codes for fluid port: A, C, E, G

A = thread to ISO228 (BSP)

B = thread to DIN13 or ISO965/1 (metric)

C = thread to ANSI B1.1 (UN...-2B seal SAE J 514)

D = thread to ANSI B1.20.1 (NPT)

S = special thread, to customer specification

Flange, codes for fluid port: F

A = EN 1092-1 welding neck flange

B = flange ASME B16.5

C = SAE flange 3000 psi

D = SAE flange 6000 psi

S = special flange, to customer specification

Required gas pre-charge pressure must be stated separately!

¹⁾ When ordering a spare bladder, please state diameter of the smaller shell port

²⁾ Dependent on type and pressure rating

³⁾ Standard materials, all other materials on request

⁴⁾ Elastomer types not available for all bladder sizes.

⁵⁾ Observe temperature ranges, see section 2.1.


3. LOW PRESSURE ACCUMULATOR TYPES

3.1. SB40-2.5 ... 50

3.1.1 Design

HYDAC low pressure accumulators in the series SB40-2.5 ... 50 consist of a welded pressure vessel, an accumulator bladder with gas valve and a hydraulic connection with a perforated disc (check valve on request). In addition, we can offer suitable adapters for connection to the hydraulic system.

3.1.2 Dimensions SB40-2.5 ... 50

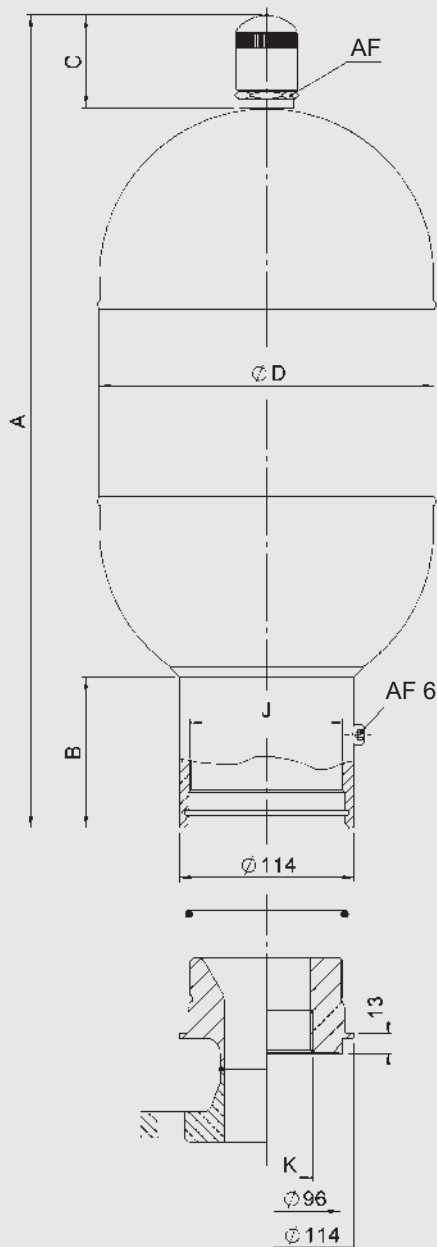


Standard versions: permitted operating pressure 40 bar (PED)

Nominal volume [l]	Eff. gas volume [l]	Part no.		A [mm]	B [mm]	C [mm]	Ø D [mm]	J thread ISO DIN 13	K thread ISO 228	AF [mm]	Q ¹⁾ [l/s]	Weight [kg]
		Carbon steel, NBR	Stainless steel, NBR									
2.5	2.5	3114684	3130528	541	122	68	108	M100x2	G 2	36	7	9
5	5	3113791	3118722	891								13
10	9.3	3111110	3125662	533	106	78	219	M100x2	G 2	36	7	14
20	18	3125719	3130529	843								23
32	33.5	3130487	3130530	1363								38
50	48.6	3119445	3130531	1875						68 ²⁾		52

¹⁾ Q = max. flow rate of operating fluid (at approx. 0.5 bar pressure drop via connection)

²⁾ Use C-spanner

3.1.3 Spare parts
SB40-2.5 ... 50

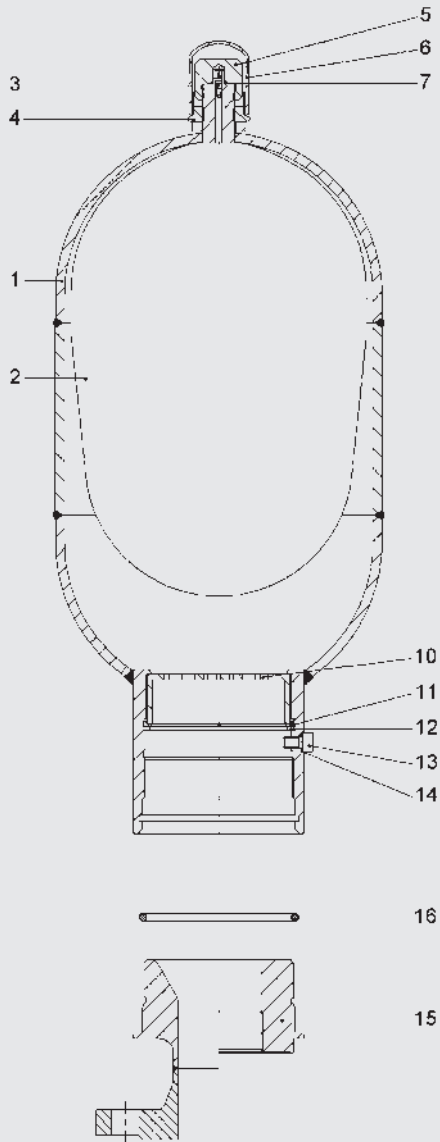

Description	Item
-------------	------

Bladder assembly ¹⁾

consisting of:

Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7

Seal kit

consisting of:

O-ring	7
Vent screw	13
Seal ring	14
O-ring	16

Repair kit ¹⁾

consisting of:

Bladder assembly (see above)	
Seal kit (see above)	

Hydraulic connection assembly

consisting of:

Hydraulic connector	10
Anti-extrusion ring	11
Retaining ring	12
Vent screw	13
Seal ring	14

* Available separately

¹⁾ When ordering, please state diameter of the smaller shell port

Accumulator shell (item 1) not available as a spare part
Adapter (item 15) incl. O-ring (item 16) available as an accessory, please ask


3.2. SB40-70 ... 220

3.2.1 Design

HYDAC low pressure accumulators in the series SB40-70 ... 220 consist of a welded pressure vessel, an accumulator bladder with gas valve and a hydraulic connection with a check valve.

In addition, we can offer suitable adapters for connection to the hydraulic system.

3.2.2 Dimensions SB40-70 ... 220

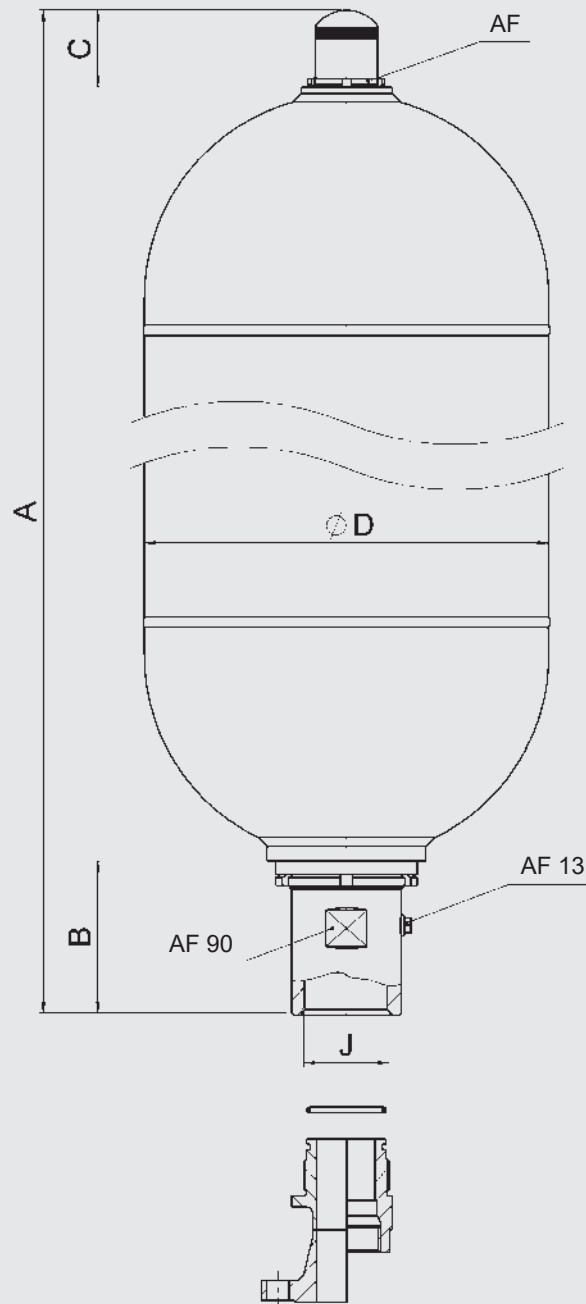


Standard versions: permitted operating pressure 40 bar (PED)

Nominal volume [l]	Eff. gas volume [l]	Part no.		A max. [mm]	B [mm]	C [mm]	Ø D [mm]	J thread ISO 228	AF [mm]	Q ¹⁾ [l/s]	Weight [kg]
		Carbon steel, NBR	Stainless steel, NBR								
70	65	2127513	2127533	1128	136	69	356	G 2 1/2	68 ²⁾	30	73
100	111	2127514	2127534	1655							99
130	133	2127515	2127535	1905							130
190	192	3182579	3182581	2101							175
220	221	3182582	3182583	2348							197

¹⁾ Q = max. flow rate of operating fluid

²⁾ Use C-spanner

3.2.3 Spare parts
SB40-70 ... 220

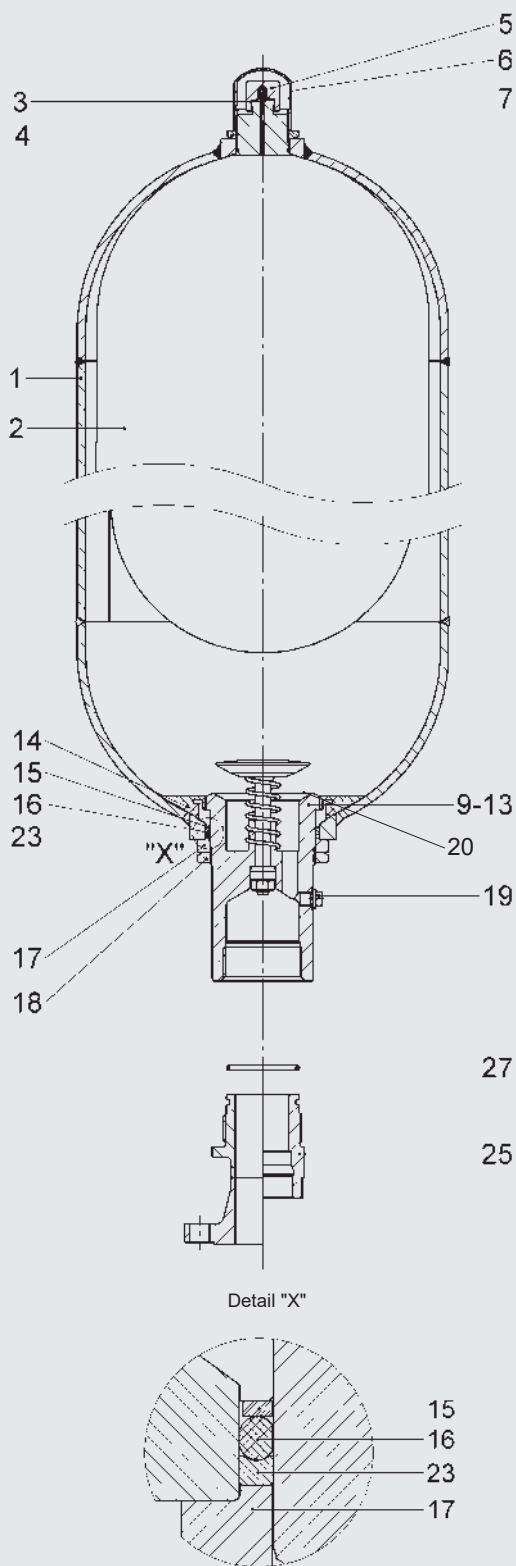

Description	Item
Bladder assembly¹⁾	
consisting of:	
Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7
Seal kit	
consisting of:	
O-ring	7
Washer	15
O-ring	16
Vent screw	19
Support ring	23
O-ring	27
Repair kit¹⁾	
consisting of:	
Bladder assembly (see above)	
Seal kit (see above)	
Oil valve assembly	
consisting of:	
Valve	9-13
Anti-extrusion ring*	14
Washer	15
O-ring	16
Spacer	17
Lock nut	18
Vent screw	19
Support ring	23

* Available separately

¹⁾ When ordering, please state diameter of the smaller shell port

Accumulator shell (item 1) not available as a spare part

Vent screw (item 19) for NBR/carbon steel:

seal ring (item 20) included


Adapter (item 25) incl. O-ring (item 27) available as an accessory, please ask

3.3. SB16/35A AND SB16/35AH

3.3.1 Design

HYDAC low pressure bladder accumulators for large volumes have a welded design. The pressure vessel is fabricated in carbon steel or in stainless steel. The hydraulic outlet is covered by a perforated disc which prevents the flexible bladder from extruding from the shell. The bladder is top-removable.

3.3.2 Dimensions

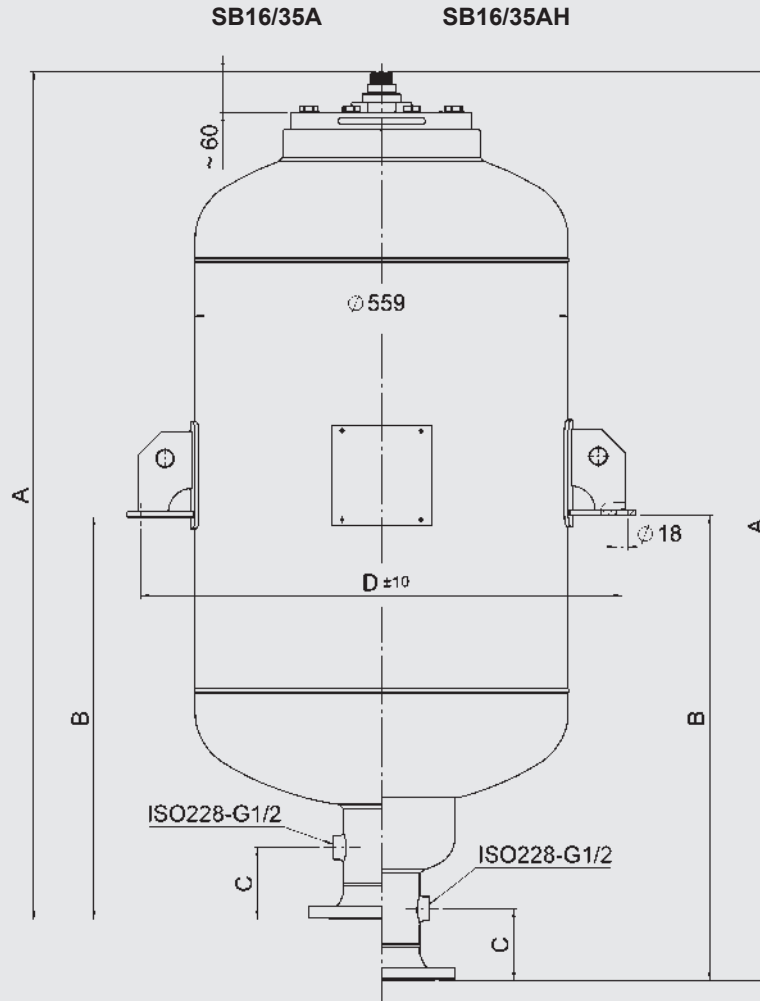

Standard versions: permitted operating pressure 16/35 bar (PED)

SB16/35A

Nominal volume	Eff. gas volume	SB16A							SB35A						
		Part no.		A (approx.)	B (approx.)	C (approx.)	D ±10	Weight	Part no.		A (approx.)	B (approx.)	C (approx.)	D ±10	Weight
		Carbon steel, NBR	Stainless steel, NBR						Carbon steel, NBR	Stainless steel, NBR					
[l]	[l]			[mm]	[mm]	[mm]	[mm]	[kg]			[mm]	[mm]	[mm]	[mm]	[kg]
150	149	4108288	4108241	1044	493	108	720	127	4108339	4108306	1076	578	121	728	171
200	203	4108290	4093557	1275	691			149	4108341	4108307	1318	699			208
300	288	4108291	4108242	1644	920			178	4108342	4108308	1701	937			261
375	374	4108292	4108243	2020	1063			214	4108355	4108312	2086	1083			315
450	453	4108294	4108244	2361	1234			244	4108357	4108314	2436	1258			364

Flange to EN1092-1/11 / DN100 / PN16 or PN40
Others on request

SB16/35AH


Nominal volume	Eff. gas volume	SB16AH							SB35AH						
		Part no.		A (approx.)	B (approx.)	C (approx.)	D ±10	Weight	Part no.		A (approx.)	B (approx.)	C (approx.)	D ±10	Weight
		Carbon steel, NBR	Stainless steel, NBR						Carbon steel, NBR	Stainless steel, NBR					
[l]	[l]			[mm]	[mm]	[mm]	[mm]	[kg]			[mm]	[mm]	[mm]	[mm]	[kg]
150	149	4108720	4108702	1135	638	108	720	135	4108773	4108729	1166	641	121	728	180
200	203	4108721	4108703	1366	754			157	4108775	4108730	1408	762			217
300	288	4108724	4108715	1735	988			186	4108774	4108734	1791	1000			270
375	374	4108725	4108717	2111	1127			222	4108776	4108758	2176	1146			324
450	453	4108726	4108718	2452	1298			252	4108778	4108762	2526	1321			373

Flange to EN1092-1/11 / DN100 / PN16 or PN40
Others on request


3.3.3 Spare parts SB16/35A, SB16/35AH

The following spare parts relate exclusively to hydraulic accumulators from the construction year 2016 and later.

For low-pressure bladder accumulators SB16/35A and SB16/35AH with construction year < 2016, spare parts are available on request.

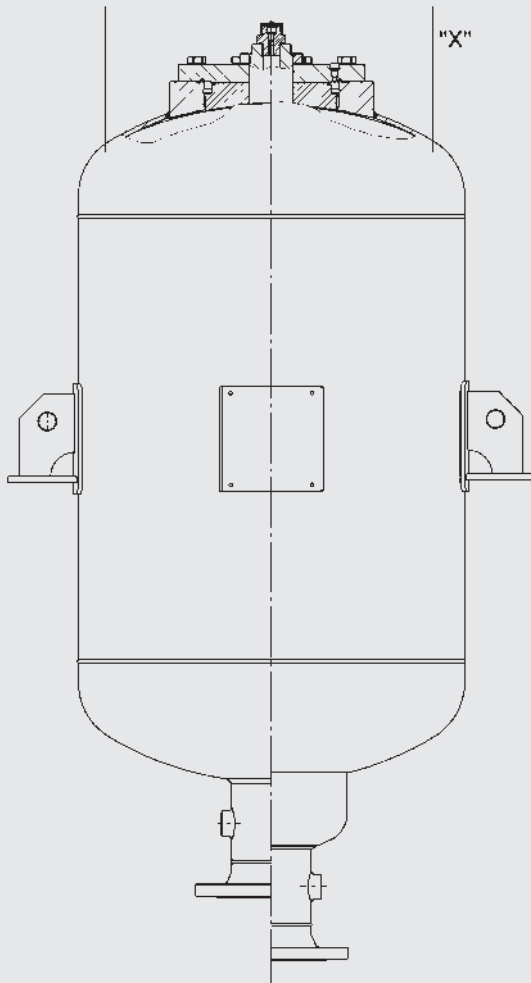

Detail "X"

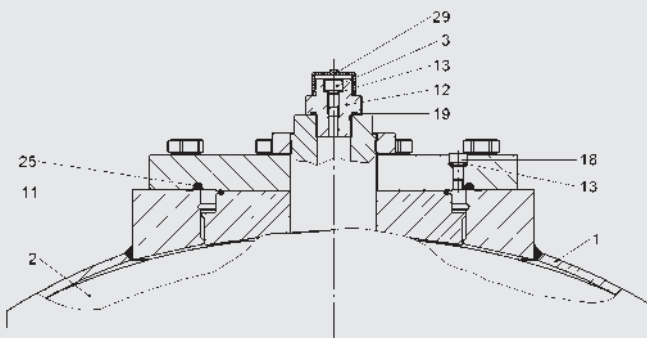

Description	Item
Bladder	2
Gas valve assembly	
consisting of:	
Locking screw	3
Gas valve body	12
Seal ring	13
O-ring	19
Protective cap	29

Seal kit	
consisting of:	
O-ring	11
Seal ring	13
Vent screw	18
O-ring	19
O-ring	25

Accumulator shell (item 1) not available as a spare part


Nominal volume	Bladder	Seal kit	
		Carbon steel, NBR	Stainless steel, NBR
[l]			
150	4241264		
200	4241263		
300	4113771	4241465	4197141
375	4113731		
450	4241435		

3.4. SB35HB

3.4.1 Design

HYDAC high flow bladder accumulators in the series SB35HB are high performance accumulators for flow rates of up to 20 l/s at 2 bar Δp . They consist of a welded pressure vessel and an accumulator bladder with gas valve. The pressure vessel contains a fixed perforated disc which permits a high flow rate through its large free cross section. In addition, we can offer suitable adapters for connection to the hydraulic system.

3.4.2 Dimensions SB35HB

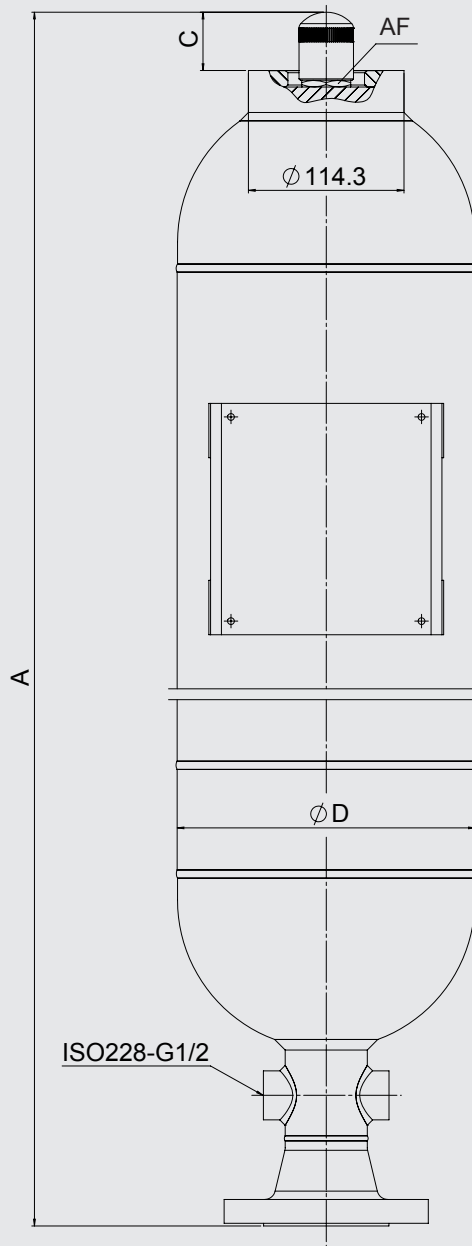

Standard versions: permitted operating pressure 35 bar (PED)


Nominal volume [l]	Eff. gas volume [l]	Part no.		A max. [mm]	C [mm]	Ø D [mm]	AF [mm]	Q ¹⁾ [l/s]	DN*	Weight [kg]
		Carbon steel, NBR	Stainless steel, NBR							
20	19.8	3130682	3130683	1081	63	219	36	20	50	43
32	35	3130684	3130685	1591			56			
50	50	3130686	3130687	2091	78	Ø 68 ²⁾				69

* To EN 1092-1/11 / PN40, others on request

¹⁾ Q = max. flow rate of operating fluid

²⁾ Groove nut

3.4.3 Spare parts SB35HB

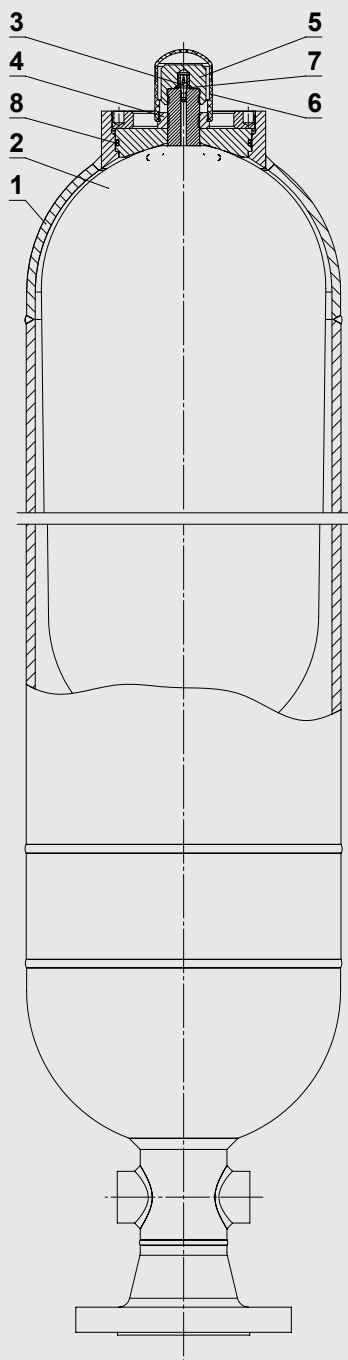

Description	Item
-------------	------

Bladder assembly ¹⁾

consisting of:

Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7

Seal kit

consisting of:

Gas valve insert*	3
O-ring	7
O-ring	8

Repair kit ¹⁾

consisting of:

Bladder assembly (see above)

Seal kit (see above)

* Available separately

¹⁾ When ordering, please state diameter of the smaller shell port

Accumulator shell (item 1) not available as a spare part

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Bladder Accumulators Standard design

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas is utilised in hydraulic accumulators for storing fluids. HYDAC bladder accumulators are based on this principle, using nitrogen as the compressible medium.

A bladder accumulator consists of a fluid section and a gas section with the bladder acting as the gas-tight separation element. The fluid around the bladder is connected to the hydraulic circuit so that the bladder accumulator draws in fluid when the pressure increases and the gas is compressed.

When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

HYDAC bladder accumulators can be used in a wide variety of applications, some of which are listed below:


- Energy storage
- Emergency operation
- Force equilibrium
- Leakage compensation
- Volume compensation
- Shock absorption
- Vehicle suspension
- Pulsation damping

See catalogue section:

- Hydraulic dampers
No. 3.701

1.2. DESIGN

SB330/400/500/550/600, SB330H/SB330N

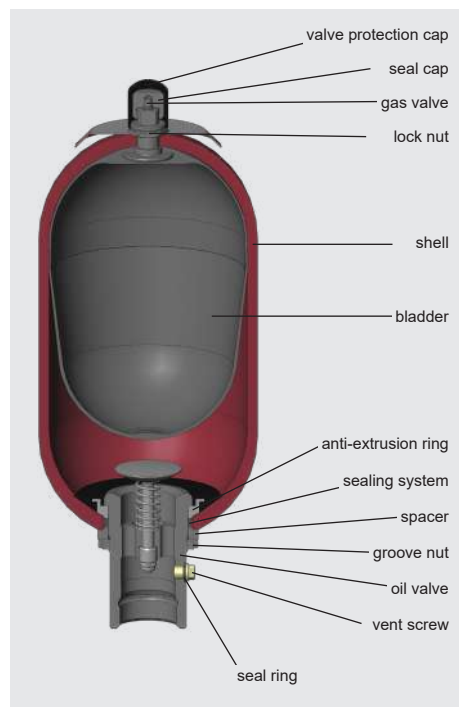

Design

● Standard bladder accumulator

SB330/400/500/550

HYDAC standard bladder accumulators consist of the pressure vessel, the flexible bladder with gas valve and the hydraulic connection with check valve. The pressure vessels are seamless and manufactured from high tensile steel.

● Bladder accumulator

SB330N

The flow-optimised design of the standard oil valve enables the maximum possible operating fluid flow rate to increase to 25 l/s with this accumulator type.


● High flow bladder accumulator

SB330H

HYDAC high flow bladder accumulators type SB330 are high performance accumulators with a flow rate of up to 30 l/s. The fluid port is enlarged to allow higher flow rates.

● SB600

For higher pressures, with the ASME U stamp, HYDAC provides the series SB600 with approval S (p_{max} 345 bar / 5000 psi).

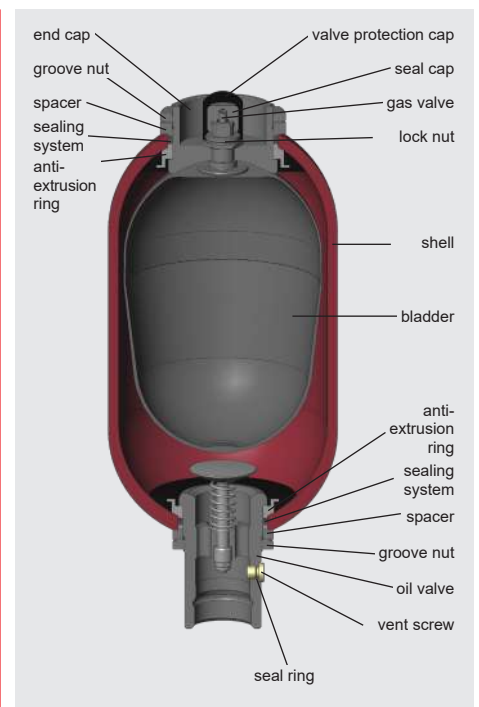

Design

● Bladder accumulator

SB330B

HYDAC bladder accumulators SB330B are designed to allow the bladder to be removed from above. This has the advantage that the bladder accumulator does not need to be removed from the hydraulic system for inspection and repair work.

1.3. BLADDER MATERIAL

The bladder material must be selected in accordance with the particular operating medium or operating temperature, see section 2.1.

If discharge conditions are unfavourable (high p_2/p_0 pressure ratio, rapid discharge speed), the gas may cool to below the permitted temperature. This can cause cold cracking. The gas temperature can be calculated using the HYDAC Accumulator Simulation Program **ASP**.

1.4. CORROSION PROTECTION

For operation with chemically aggressive media, the accumulator shell can be supplied with corrosion protection, such as chemical nickel-plating. If this is insufficient, then stainless steel hydraulic accumulators must be used.

1.5. INSTALLATION POSITION

HYDAC bladder accumulators can be installed vertically, horizontally and at a slant. When installing vertically or at a slant, the oil valve must be at the bottom. For certain applications listed below, particular positions are preferable:

- Energy storage: vertical
- Pulsation damping: any position from horizontal to vertical
- Maintaining constant pressure: any position from horizontal to vertical
- Volume compensation: vertical

If the installation position is horizontal or at a slant, the effective fluid volume and the maximum permitted flow rate of the operating fluid are reduced.

1.6. TYPE OF INSTALLATION

By using an adapter, HYDAC hydraulic accumulators with a volume of up to 1 l can be installed directly inline.

For strong vibrations and volumes above 1 litre, we recommend the use of HYDAC mounting clamps or the HYDAC accumulator mounting set.

See catalogue sections:

- Mounting elements for hydraulic accumulators
No. 3.502
- ACCUSET SB
No. 3.503

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Operating pressure

See tables in section 3. (PED)

May differ from nominal pressure for other test certificates.

2.1.2 Permitted operating temperature of the hydraulic accumulator

-10 °C ... +80 °C

Standard design, others on request

2.1.3 Nominal volume

See tables in section 3.

2.1.4 Effective gas volume

See tables in section 3.

Based on nominal dimensions, this differs slightly from the nominal volume and must be used when calculating the effective fluid volume.

2.1.5 Effective volume

Volume of fluid which is available between the operating pressures p_2 and p_1 .

2.1.6 Max. flow rate of the operating fluid

In order to achieve the max. flow rate given in the tables, the accumulator must be installed vertically. It must be noted that a residual fluid volume of approx. 10 % of the effective gas volume remains in the accumulator.

The maximum fluid flow rate was determined under specific conditions and is not applicable in all operating conditions.

2.1.7 Working temperature and operating medium

The permitted working temperature of a bladder accumulator is dependent on the application limits of the metal materials and the bladder. Outside this temperature range, special materials must be used. The operating medium must also be taken into account. The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
		5	-50 °C ... + 50 °C		
		9	-30 °C ... + 80 °C		
ECO	Ethylene oxide epichlorohydrin rubber	3	-30 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the HFB group ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
IIR	Butyl rubber	4	-50 °C ... +100 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
FKM	Fluorine rubber	6	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material code, accumulator bladder

²⁾ Others on request

2.1.8 Gas charging

Hydraulic accumulators must only be charged with nitrogen.

Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm).

If other gases are to be used, please contact HYDAC for advice.

2.1.9 Limits for gas pre-charge pressure

$$p_0 \leq 0.9 \cdot p_1$$

with a permitted pressure ratio of:

$$p_2 : p_0 \leq 4 : 1$$

p_2 = max. operating pressure

p_0 = pre-charge pressure

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses due to physical properties.

2.1.10 Certificate codes

Country	Certificate code (CC)
EU member states	U
Australia	F ¹⁾
Belarus	A6
Canada	S1 ¹⁾
China	A9
Hong Kong	A9
Iceland	U
Japan	P
Korea (Republic)	A11
New Zealand	T
Norway	U
Russia	A6
South Africa	S2
Switzerland	U
Turkey	U
Ukraine	A10
USA	S

¹⁾= Registration required in the individual territories or provinces.

Others on request

2.1.11 Gas-side connection, standard model

Series	Volume [l]	Gas valve type
SB330 / SB400	< 1	5/8-18UNF
	< 50	7/8-14UNF
	≥ 50	M50x1.5 / 7/8-14UNF
SB500 / SB600	10 ... 50	M50x1.5 / 7/8-14UNF
SB550	1 ... 5	7/8-14UNF

Other pressure ranges on request

2.1.12 Notice

All work on HYDAC bladder accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.201.BA

Assembly and repair instructions are available for work which may be carried out on the bladder accumulator after installation and commissioning, e.g. repair work.

No. 3.201.M

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

SB330 (H) – 32 A 1 / 112 U – 330 A 050

Series

Type code

No details = standard

H = high flow

N = flow-optimised valve, fluid side

A = shock absorber

P = pulsation damper ³⁾

B = bladder top-repairable

E = bladder with foam filling

DA = bladder integrity system, industry version
(others on request)

L = light-weight

Combinations must be agreed with HYDAC.

Nominal volume [l]

Fluid port

A = standard connection, thread with internal seal face

F = flange connection

C = valve mounting with screws on underside

E = sealing surfaces on front interface
(e.g. on thread M50x1.5 – valve)

G = external thread

S = special connection, to customer specification

Gas side

1 = standard design (see section 2.1.11)

2 = back-up version ⁴⁾

3 = gas valve 7/8-14UNF with M8 internal thread

4 = gas valve 7/8-14UNF with gas valve connection 5/8-18UNF

5 = gas valve M50x1.5 in accumulators smaller than 50 l

6 = 7/8-14UNF gas valve

7 = M28x1.5 gas valve

8 = M16x1.5 gas valve

(with M14x1.5 bore in gas valve)

9 = special gas valve, to customer specification

Material code (MC)

dependent on operating medium

standard design = 112 for mineral oils

others on request

Fluid port

1 = carbon steel

2 = high tensile steel

3 = stainless steel ²⁾

6 = low temperature steel

Accumulator shell

0 = plastic coated (internally)

1 = carbon steel

2 = chemically nickel-plated (internal coating)

4 = stainless steel ²⁾

6 = low temperature steel

Accumulator bladder ¹⁾

2 = NBR ⁵⁾

3 = ECO

4 = IIR

5 = NBR ⁵⁾

6 = FKM

7 = other

9 = NBR ⁵⁾

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Connection, fluid side

Thread, codes for fluid port: A, C, E, G

A = thread to ISO228 (BSP)

B = thread to DIN13 or ISO965/1 (metric)

C = thread to ANSI B1.1 (UN.-2B seal SAE J 514)

D = thread to ANSI B1.20.1 (NPT)

S = special thread, to customer specification

Flange, codes for fluid port: F

A = EN 1092-1 welding neck flange

B = flange ASME B16.5

C = SAE flange 3000 psi

D = SAE flange 6000 psi

S = special flange, to customer specification

Pre-charge pressure p_0 (bar) at 20 °C, must be stated clearly, if required!

¹⁾ When ordering a spare bladder, please state diameter of the smaller shell port

²⁾ Dependent on type and pressure rating


³⁾ See catalogue section Hydraulic dampers, No. 3.701

⁴⁾ See catalogue section Hydraulic accumulators with back-up nitrogen bottles, No. 3.553

⁵⁾ Observe temperature ranges, see section 2.1.

3. DIMENSIONS AND SPARE PARTS

3.1. DIMENSIONS

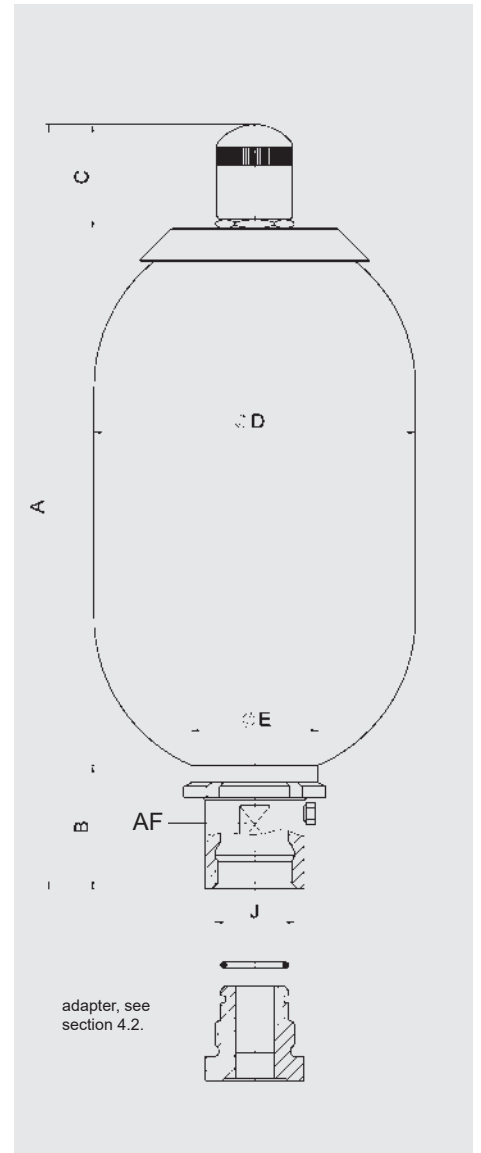

Carbon steel, NBR

Nominal volume	Series	Max. operating pressure				Eff. gas volume	A max.	B	C	Ø D max.	J thread	Ø E	AF	Q ¹⁾	Weight
		Certificate code (CC) U		Certificate code (CC) S											
		[bar]	Part no.	[bar]	Part no.										
0.5	SB400	400	3047163	–	–	0.5	270	57	33.5	96	G 3/4	50	32	4	4
1	SB330	330	3047162	–	–	1	316	57	56	115	G 3/4	50	32	4	7
	SB550 ³⁾	550	3110531	–	–		343	67		123	G 1	67	45	6	10
2.5	SB330	330	3047165	–	–	2.4	528	64	56	115	G 1 1/4	67	50	10	11
	SB550 ³⁾	550	3068916	–	–	2.5	550	67		123	G 1		45	6	14
4	SB330	330	3047166	–	–	3.7	412	65	56	170	G 1 1/4	67	50	10	15
	SB400 ³⁾	400	3107905	–	–										
5	SB550 ³⁾	550	3090654	–	–	4.9	876	64	56	123	G 1	67	45	6	17
6	SB330	330	3047168	–	–	5.7	534	65	56	170	G 1 1/4	67	50	10	18
10 ²⁾	SB330	330	3047170	–	–	9.3	810	65	56	170	G 1 1/4	67	50	10	31
10	SB330	330	3047172	262	3141237	9.3	582	101	56	229	G 2	100	70	15	33
	SB330N		3156632	–	–									25	34
	SB330H		3079081	–	–									9	617
	SB400 ³⁾	400	3107393	–	–	9.3	578	101	69	234	G 2	100	70	15	41
	SB500 ³⁾	500	3130252	–	–	8.8	598			241				46	
	SB600	–	–	345	332265										
13	SB330	330	3047173	–	–	12	695	101	56	229	G 2	100	70	15	46
	SB330N		–	–	–									25	47
	SB330H		–	–	–									730	136
	SB400 ³⁾	400	–	–	–		695	101	234	G 2	100	70	15	49	
20	SB330	330	3047174	262	3117153	18.4	895	101	56	229	G 2	100	70	15	49
	SB330N		3162982	–	–									25	
	SB330H		3092659	–	–									17.5	930
	SB400 ³⁾	400	3115007	–	–	18.4	895	101	69	234	G 2	100	70	71	
	SB500 ³⁾	500	3118156	–	–	17	913			241			75	15	77
	SB600	–	–	345	332266										
24	SB330	330	3047175	–	–	23.6	1060	101	56	229	G 2	100	70	15	72
	SB330N		–	–	–									25	73
	SB330H		–	–	–									24	1095
32	SB330	330	3047176	262	3117154	33.9	1410	101	56	229	G 2	100	70	15	80
	SB330N		3220899	–	–									25	81
	SB330H		3059515	–	–									32.5	1445
	SB400 ³⁾	400	3125141	290	–	33.9	1410	101	69	234	G 2	100	70	104	
	SB500 ³⁾	500	3760577	–	–	33.5	1423			241			75	15	112
	SB600	–	–	345	332267										
50	SB330	330	3047177	262	362904	47.5	1933	101	69	229	G 2	100	70	15	114
	SB330N		3185604	–	–									25	115
	SB330H		3089605	–	–									1968	136
	SB400 ³⁾	400	3114662	–	–	48.3	1933	101	69	234	G 2	100	70	137	
	SB500 ³⁾	500	3130253	–	–					241			75	15	167
	SB600	–	–	345	332268										
60	SB330	330	3341217	–	–	60	1210	138	69	360	G 2 1/2	125	90	30	160
80	SB330	330	–	–	–	85	1460	138	69	360	G 2 1/2	125	90	30	200
100	SB330	330	3098489	–	–	105	1710	138	69	360	G 2 1/2	125	90	30	234
130	SB330	330	–	–	–	133	2030	138	69	360	G 2 1/2	125	90	30	283
160	SB330	330	–	–	–	170	2059	137	69	410	G 2 1/2	125	90	30	345
200	SB330	330	–	–	–	201	2359	137	69	410	G 2 1/2	125	90	30	403


¹⁾ Q = max. flow rate of the operating fluid under optimum conditions

²⁾ Slimline version, for confined installation spaces

³⁾ Material code (MC) = 212 for certificate code (CC) U, see model code, section 2.2.


3.2. SPARE PARTS

SB330/400/500/550/600
SB330H / SB330N

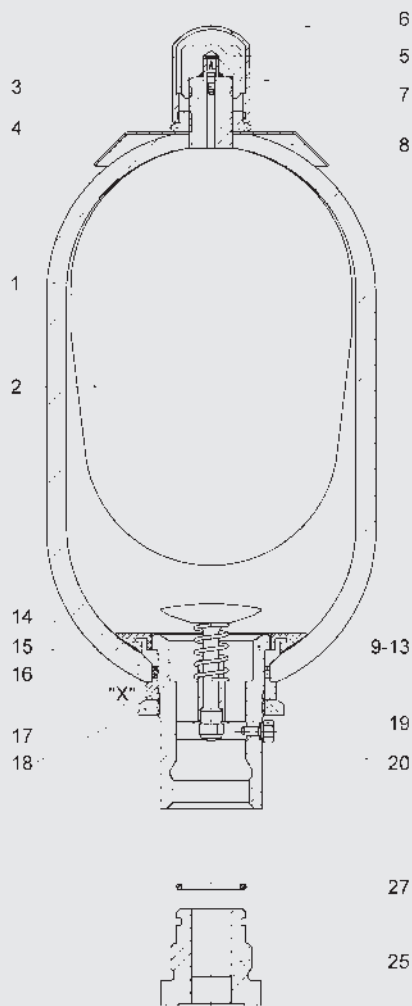


Detail "X"

SB330/400 – 0.5 ... 6 l
SB330 – 10 l slimline version



SB330/400/500/600 – 10 ... 50 l
SB330 - 60 ... 200 l
SB330H/N – 10 ... 50 l
SB550 – 1 ... 5 l



Description	Item
Bladder assembly ¹⁾ consisting of:	
Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7
Seal kit consisting of:	
O-ring	7
Washer	15
O-ring	16
Vent screw	19
Support ring	23
O-ring	27
Repair kit ¹⁾ consisting of:	
Bladder assembly (see above)	
Seal kit (see above)	
Oil valve assembly consisting of:	
Valve	9-13
Anti-extrusion ring*	14
Washer	15
O-ring	16
Spacer	17
Groove nut	18
Vent screw	19
Support ring	23

* Available separately

¹⁾ When ordering, please state diameter of the smaller shell port

Accumulator shell (item 1) and company label (item 8) not available as a spare part

Vent screw (item 19) for NBR/carbon steel: seal ring (item 20) included

Adapter (item 25) incl. O-ring (item 27) available as an accessory, section 4.

SB330/400
carbon steel, NBR
standard gas valve

Volume [l]	Bladder assembly	Seal kit	Repair kit
0.5	365263	353606	2128169 ²⁾
1	237624		2106261
2.5	236171	353609	2106200
4	236046		2106204
5	240917		2106208
6	2112097		2112100
10*	2127255 ¹⁾	353621	3117512 ¹⁾
10	236088		2106212
13	376249		2106216
20	236089		2106220
24	376253		2106224
32	235335		2106228
50	235290		2106252
60	3364274		3102043 ¹⁾
80	3364312	3117514	
100	3127313	3117515	
130	3201384	3117516	
160	3184769	3117517	
200	3461300	3117558	

Volume [l]	Oil valve assembly	Anti-extrusion ring	Gas valve insert	
0.5	2102355	2105411	632865	
1				
2.5	238523	2105431		
4				2105451
5				
6				
10*	352572	2105491		
10				
13				
20				
24				
32				
50	3273734	3102326		
60				
80				
100				
130	3102326	3102326		
160				
200				

* Slimline version, for confined installation spaces

¹⁾ Only for SB330

²⁾ Only for SB400

Others on request

4. ACCESSORIES FOR BLADDER ACCUMULATORS

4.1. ADAPTERS (GAS SIDE)

The adapters shown below are available for standard connections on bladder accumulators and must be specified separately in the order.


4.1.1 Adapter for safety devices

Adapter for connecting safety devices, such as burst discs or temperature fuses, see catalogue section:

- Safety equipment for hydraulic accumulators
No. 3.552

4.1.2 Pressure gauge model

Gas-side connection on the bladder accumulator for permanent monitoring of the pre-charge pressure

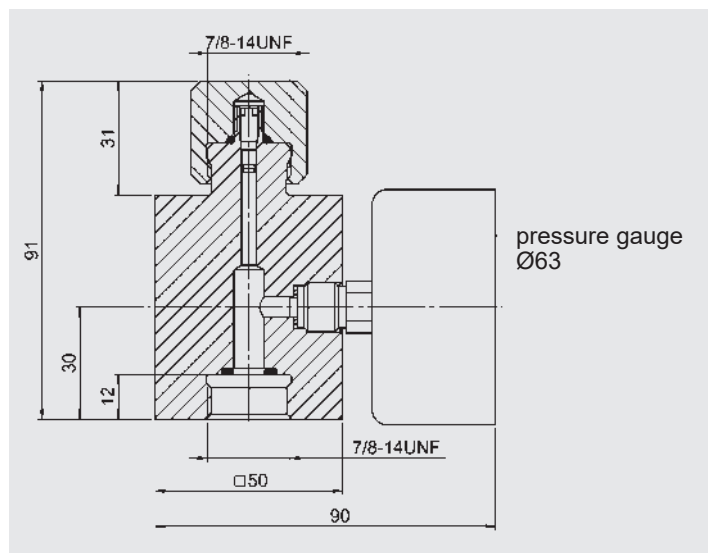


Gauge indication range	Pressure gauge Part no.	Adapter* assembly Part no.
–	–	366621
0 - 10 bar	614420	2108416
0 - 60 bar	606886	3093386
0 - 100 bar	606887	2104778
0 - 160 bar	606888	3032348
0 - 250 bar	606889	2100217
0 - 400 bar	606890	2102117

* $p_{max} = 400$ bar

4.1.3 Pressure gauge model with shut-off valve

Gas side connection on the bladder accumulator for permanent monitoring of the pre-charge pressure with shut-off option.

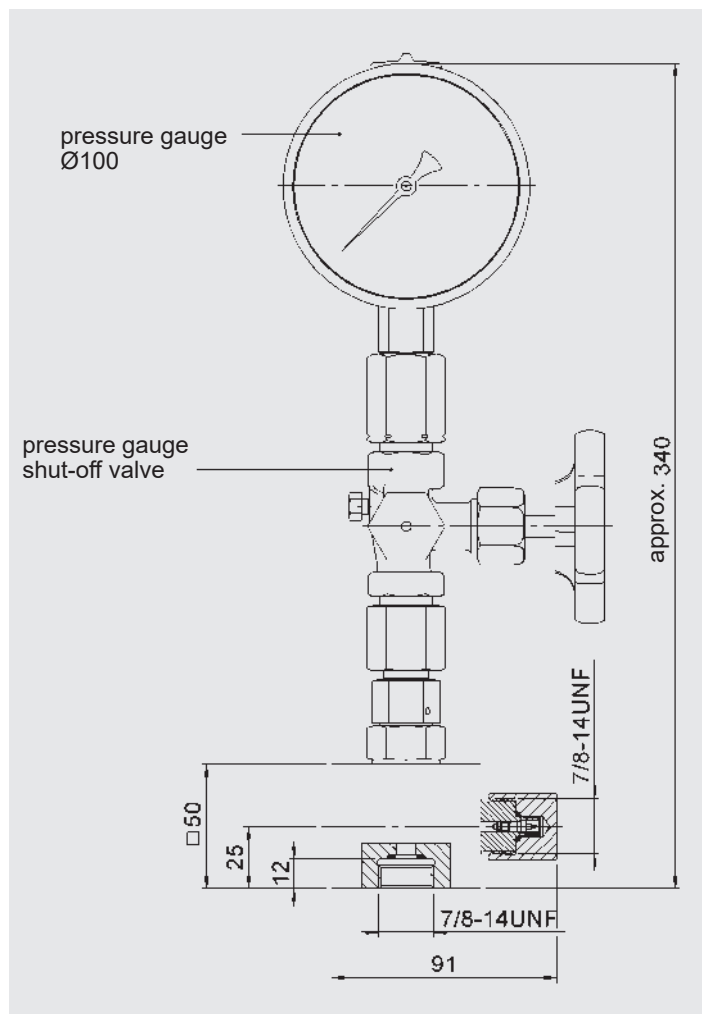


Gauge indication range	Pressure gauge Part no.	Adapter* assembly Part no.
–	–	2103381
0 - bar	617928	3784725
0 - 60 bar	606771	2110059
0 - 100 bar	606772	3139314
0 - 160 bar	606773	3202970
0 - 250 bar	606774	3194154
0 - 400 bar	606775	2103226

* $p_{max} = 400$ bar

4.1.4 Remote monitoring of the pre-charge pressure

To monitor the pre-charge pressure in hydraulic accumulators remotely, gas-side adapters with a pressure gauge and mounting bores are available.

In order to connect these adapters directly to the hydraulic accumulator using appropriate pipework, accumulator connectors are also available for connection at the top (see figure 1) or for connection at the side (see figure 2).

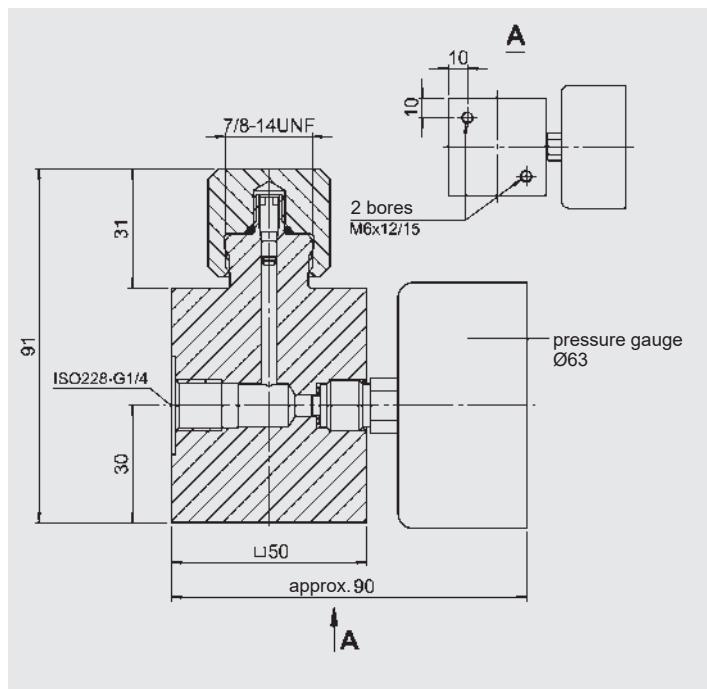

Gauge indication range	Pressure gauge Part no.	Adapter* assembly Part no.
-	-	3037666
0 - 10 bar	614420	3095818
0 - 60 bar	606886	3095819
0 - 100 bar	606887	3095820
0 - 160 bar	606888	3095821
0 - 250 bar	606889	3095822
0 - 400 bar	606890	3095823

* p_{max} = 400 bar

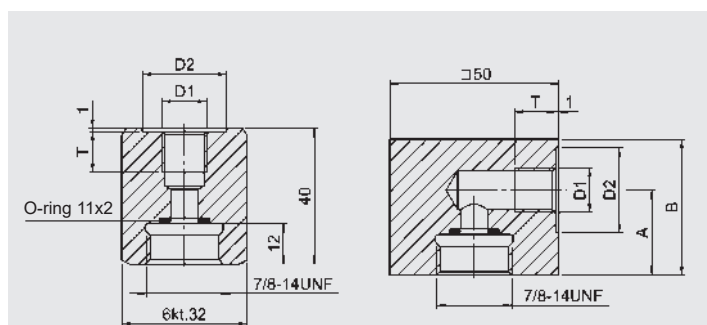


Figure 1


Figure 2

D1 Threaded connection	D2 [mm]	T [mm]	A [mm]	B [mm]	Adapter* assembly Part no.	Figure
ISO228 - G 1/4	25	14	-	-	2109481	1
			25	40	2102042	2
ISO228 - G 3/8	28	14	-	-	2109483	1
			25	40	366607	2
ISO228 - G 1/2	34	16	-	-	2110636	1
			31	55	366608	2

* p_{max} = 400 bar

4.2. ADAPTERS FOR STANDARD BLADDER ACCUMULATORS (FLUID SIDE)

To connect the bladder accumulator to threaded pipe fittings. These are available separately.

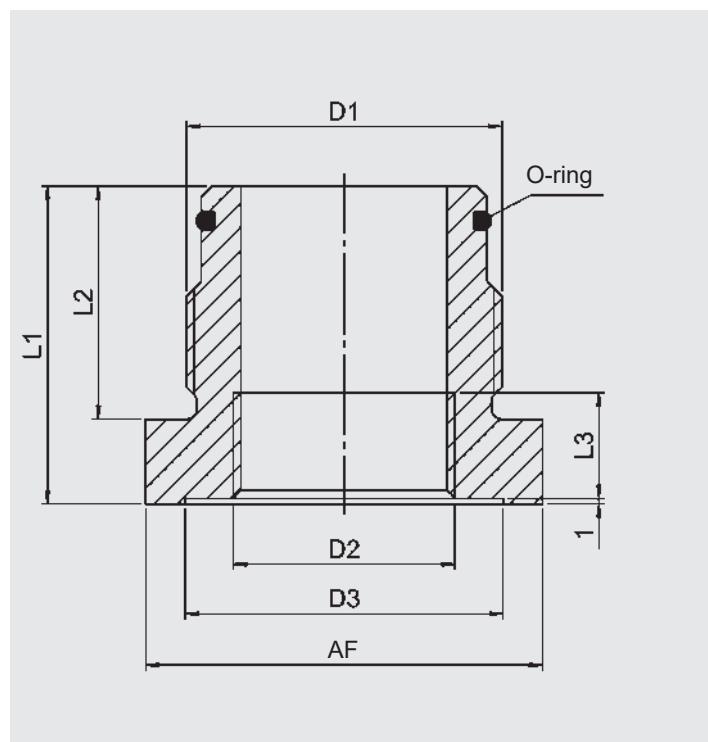


D1 Accum. conn.*	D2	D3 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	AF [mm]	O-ring [mm]	Part no.
ISO 228-BSP	ISO 228-BSP	28	55	28	12	32	17x3	2104346
			60		14	36		2104348
G 1 1/4	G 3/8	28	50	37	12	46	30x3	2116345
					14			2105232
			16	2104384				
			18	65	2110124			
G 2	G 1/2	34	60	44	14	65	48x3	2104853
					16			2104849
			18	2124831				
			20	2107113				
			22	70	2105905			
G 2 1/2	G 1 1/2	68	66	50	20	80	62x4	2127406
					22			3243831
			27	100	2113403			

* Others on request

4.3. TRANSPORT EQUIPMENT FOR BLADDER ACCUMULATORS

Various types of transport equipment are available for transporting standard bladder accumulators. The weights of the bladder accumulators are given in section 3.1.

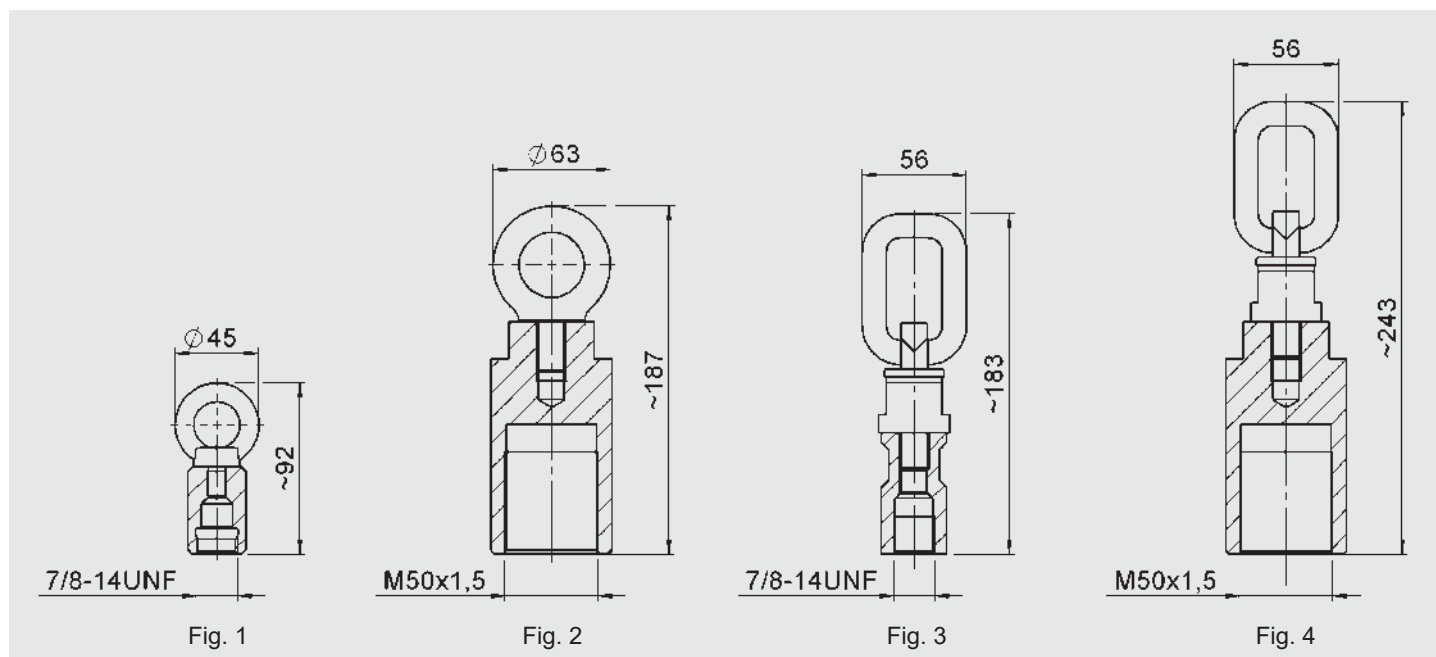

Material	Part no.	Gas side connection	max. [kg]	Special feature	Fig.
Carbon steel	4356969	7/8-14UNF	350	-	1
	4356971	M50x1.5	350	-	2
	4152199	7/8-14UNF	1120	swivel-type	3
	4356954	M50x1.5	1120	swivel-type	4

Others on request

5. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: 0049 (0) 68 97 / 509 - 01

Fax: 0049 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Bladder Accumulators High pressure

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas (nitrogen) is utilised in hydraulic accumulators for storing fluids.

HYDAC bladder accumulators are based on this principle.

A bladder accumulator consists of a fluid section and a gas section with the bladder acting as the gas-tight separation element.

The fluid around the bladder is connected to the hydraulic circuit so that the bladder accumulator draws in fluid when the pressure increases and the gas is compressed. When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

HYDAC bladder accumulators can be used in a wide variety of applications and are also available in different pressure ranges, see catalogue sections:

- Bladder accumulators
Standard design
No. 3.201
- Bladder accumulators
Low pressure
No. 3.202
- HYDAC Accumulator Technology
No. 3.000

1.2. DESIGN

The high pressure bladder accumulator consists of the pressure vessel, the flexible bladder with gas valve and the hydraulic connection with check valve.

1.2.1 Shell material

The pressure vessel is seamless and manufactured from high tensile chrome molybdenum steel.

1.2.2 Bladder material

The bladder material must be selected in accordance with the particular operating medium or operating temperature, see section 2.1.

If discharge conditions are unfavourable (high p_2/p_0 pressure ratio, rapid discharge speed), the gas may cool to below the permitted temperature. This can cause cold cracking. The gas temperature can be calculated using the HYDAC Accumulator Simulation Program **ASP**.

1.2.3 Corrosion protection

For operation with chemically aggressive media, the accumulator shell can be chemically nickel-plated internally or supplied with a special plastic coating.

For external corrosion protection, the hydraulic accumulator can be supplied with an epoxy resin finish specially designed for offshore applications.

1.3. INSTALLATION POSITION AND TYPE OF INSTALLATION

Information on secure installation positions and mounting elements can be found in the following catalogue sections:

- Bladder accumulators
Standard design
No. 3.201
- Mounting elements for
hydraulic accumulators
No. 3.502
- ACCUSET SB
No. 3.503

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Operating pressure

690 bar (10000 psi)

Higher pressures on request

2.1.2 Permitted operating temperature of the hydraulic accumulator

-10 °C ... +80 °C

Standard design, others on request

2.1.3 Working temperature and operating medium

The permitted working temperature of a bladder accumulator is dependent on the application limits of the metal materials and the bladder. Outside this temperature range, special materials must be used. The operating medium must also be taken into account.

The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
		5	-50 °C ... + 50 °C		
		9	-30 °C ... + 80 °C		
ECO	Ethylene oxide epichlorohydrin rubber	3	-30 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the HFB group ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
IIR	Butyl rubber	4	-50 °C ... +100 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
FKM	Fluorine rubber	6	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material code, accumulator bladder

²⁾ Others on request

2.1.4 Gas charging

Hydraulic accumulators must only be charged with nitrogen.

Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm).

If other gases are to be used, please contact HYDAC for advice.

2.1.5 Limits for gas pre-charge pressure

$$p_0 \leq 0.9 \cdot p_1$$

with a permitted pressure ratio of:

$$p_2 : p_0 \leq 4 : 1$$

p_2 = max. operating pressure

p_0 = pre-charge pressure

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses due to physical properties.

2.1.6 Notice

All work on HYDAC bladder accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!
No. 3.201.BA

Assembly and repair instructions are available for work which may be carried out on the bladder accumulator after installation and commissioning, e.g. repair work.

No. 3.201.M

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:


● HYDAC Accumulator Technology
No. 3.000

Relevant PDF documents can be accessed at:

www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible.
Order example. For further information, please contact HYDAC.

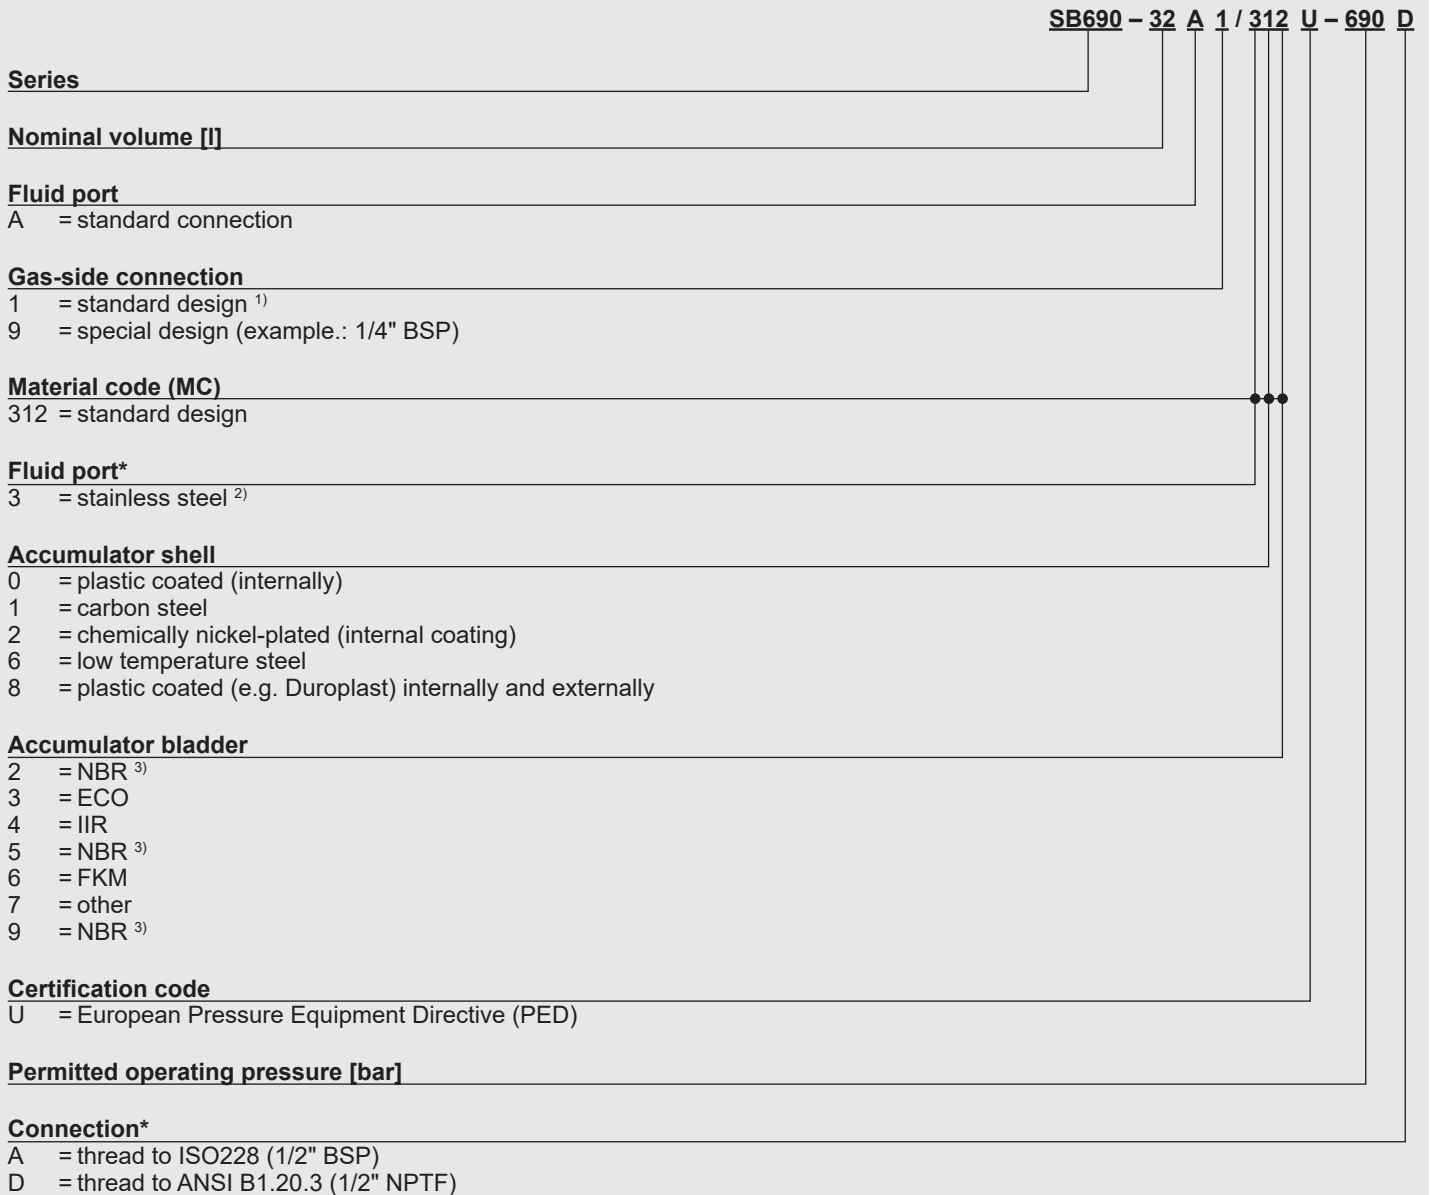

Required gas pre-charge pressure must be stated separately!

* Others on request

¹⁾ Gas valve in SB < 10 l = 7/8-14UNF,
in SB ≥ 10 l = M50x1.5


²⁾ Dependent on type and pressure rating

³⁾ Observe temperature ranges, see section 2.1.


3. DIMENSIONS AND SPARE PARTS

3.1. DIMENSIONS

SB690-1 ... 5

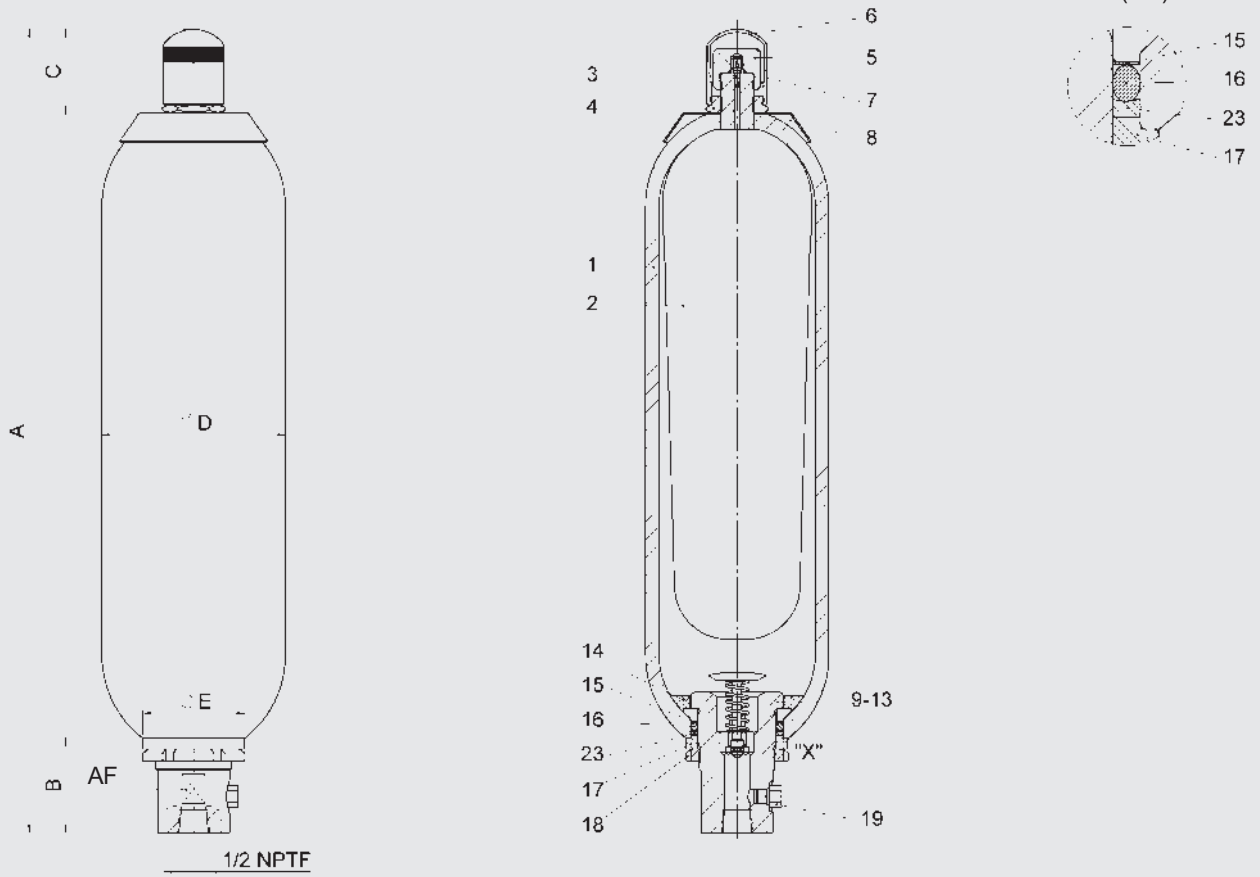

SB690-10 ... 50

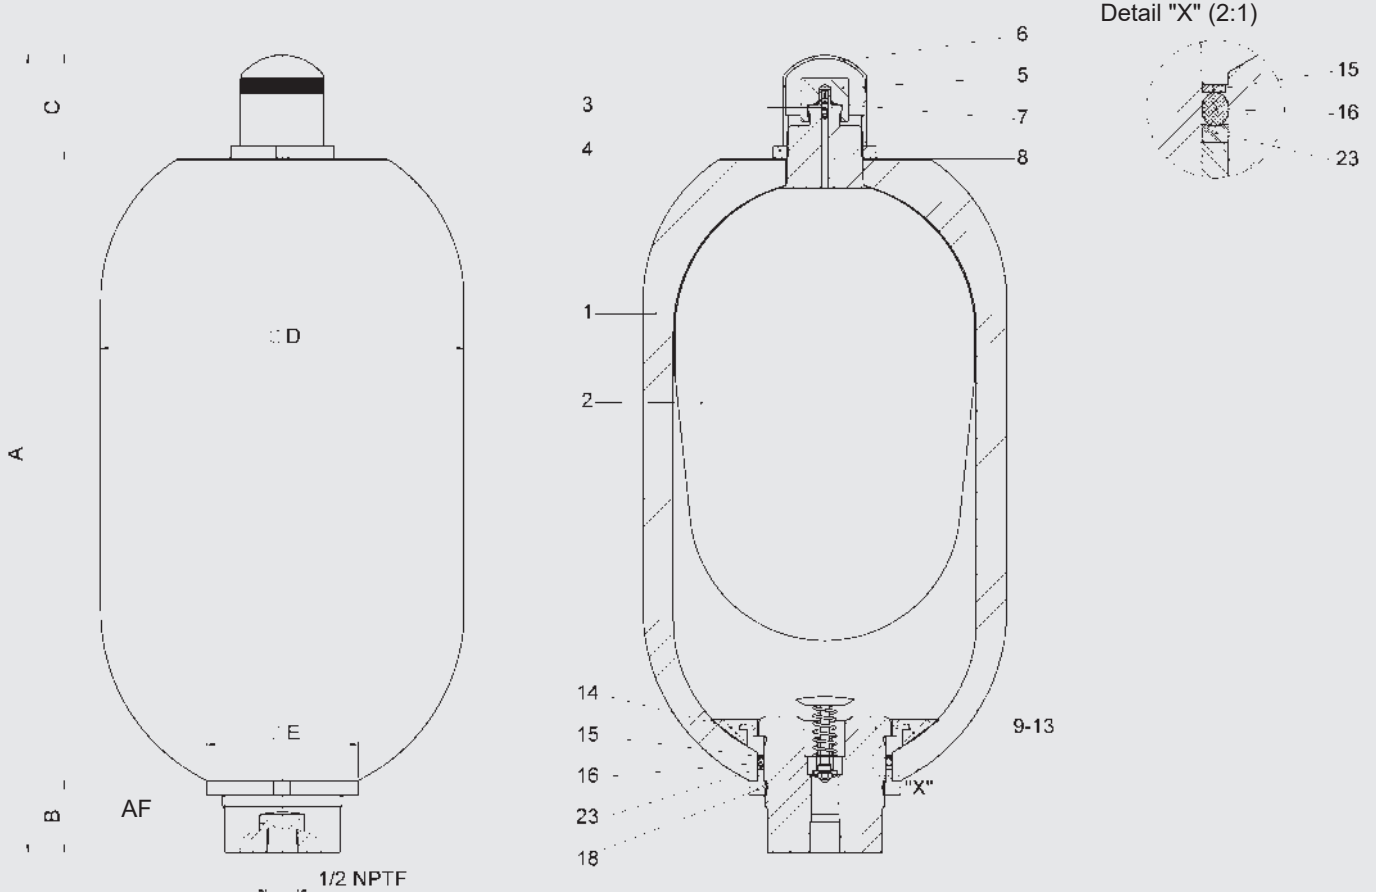

Standard designs: material code (MC) = 312, see section 2.2. Model code

Nominal volume [l]	Series	Perm. operating pressure (PED) [bar]	Part no.	Effective gas volume [l]	A max. [mm]	B [mm]	C [mm]	Ø D max. [mm]	Ø E [mm]	AF [mm]	Weight [kg]
1	SB690	690	3444800	1	324	61	58	122	67	45	8.5
2.5			3129516	2.5	531						13.5
5			3129515	4.9	860						23
10			3436744	9	522	77	68	250	110	75	54
20			3436795	17	865						114
32			3436499	33.5	1385						186
50			4291199	49.7	1900						260

3.2. SPARE PARTS

For versions with a spacer (item 17) in the volume range 10 ... 50 litres, please request spare parts separately.

Standard design

Perm. operating pressure: 690 bar (PED)

Description	Item
Bladder assembly ¹⁾	
consisting of:	
Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7
Seal kit	
consisting of:	
O-ring	7
Washer	15
O-ring	16
Vent screw	19
Support ring	23
Repair kit ¹⁾	
consisting of:	
Bladder assembly (see above)	
Seal kit (see above)	
Oil valve assembly	
consisting of:	
Valve	9-13
Anti-extrusion ring*	14
Washer	15
O-ring	16
Spacer	17
Groove nut	18
Vent screw	19
Support ring	23

* Available separately

¹⁾ When ordering, please state diameter of the smaller shell port

Accumulator shell (item 1) and company label (item 8) not available as a spare part

Nominal volume [l]	Bladder assembly Part no.	Seal kit Part no.	Repair kit Part no.	Oil valve assembly Part no.
1	3010110	3182615	3182617	4291202
2.5	3211568		3201771	
5	3211569		3201772	
10	3120931	4192830	4347598	4030279
20	3211592		4347600	
32	3211571		4347601	
50	3116598		4347602	

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar; Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Piston Accumulators Standard design

1. DESCRIPTION

1.1. FUNCTION


Fluids are practically incompressible and cannot therefore store pressure energy. The compressibility of a gas (nitrogen) is utilised in hydraulic accumulators for storing fluids. HYDAC piston accumulators are based on this principle.

A piston accumulator consists of a fluid section and a gas section with the piston acting as a gas-tight separation element. The gas section is pre-charged with nitrogen.

The fluid section is connected to the hydraulic circuit so that the piston accumulator draws in fluid when the pressure increases and the gas is compressed.

When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

1.2. DESIGN

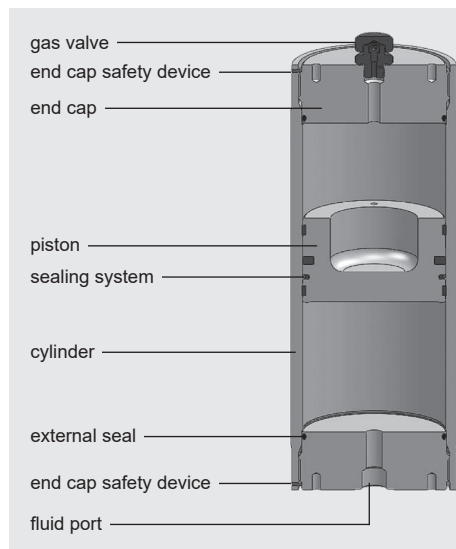

HYDAC piston accumulators consist of:

- A cylinder with very finely machined internal surface
- End caps on the gas side and the oil side, sealed with O-rings
- A floating steel or aluminium piston which can easily be accelerated due to its low weight
- A sealing system adapted to the particular field of application

The piston floats on guide rings which prevent metal-to-metal contact between the piston and the accumulator wall. For use with certain aggressive or corrosive fluids, the parts coming into contact with the fluid can be nickel plated for protection, or made entirely from corrosion-resistant material. Suitable materials are also available for low temperature applications.

When supplied piston accumulators are suitable for short-term storage.





Piston accumulators suitable for long-term storage are available on request.

1.3. SEALING SYSTEMS

Precise information about the intended operating conditions is required in order to select the most appropriate sealing system for the field of application. Important criteria for this selection are, for example, the:

- Design pressure
- Actual pressure differential
- Switching frequency or switching cycle
- Temperature fluctuation
- Operating fluid
- Cleanliness of fluid (filtration rating)
- Maintenance requirements

The sealing systems differ according to the type of piston used, each of which has its own type and arrangement of seals. Various elastomers are available as a sealing material, depending on the operating conditions, see section 1.7.5.

Design	Application	Contamination level of fluid	Comment
	<p>1</p> <ul style="list-style-type: none"> ● For general accumulator operation without special requirements <p><u>Application limitations:</u> max. piston velocity: 0.5 m/s</p>	Optimised for applications with a high level of contamination	
	<p>2</p> <ul style="list-style-type: none"> ● Low-friction design ● For high piston speeds ● Depending on fluid, slow movements without stick-slip effect <p><u>Application limitations:</u> max. piston velocity: 3.5 m/s</p>		
	<p>3</p> <ul style="list-style-type: none"> ● Low-friction design ● Simple-to-fit seals ● Depending on fluid, slow movements without stick-slip effect <p><u>Application limitations:</u> max. piston velocity: 0.8 m/s</p>	<p><u>Filtration:</u> NAS 1638 – Class 6 ISO 4406 - Class 17/15/12</p>	<p>1 guide ring for pistons with $\varnothing \leq 150$ mm</p> <hr/> <p>2 guide rings for pistons with $\varnothing \geq 180$ mm</p>
	<p>4</p> <ul style="list-style-type: none"> ● Low-friction design with emergency safety features ● Depending on fluid, slow movements without stick-slip effect ● Very low oil transfer to the gas side <p><u>Application limitations:</u> max. piston velocity: 5 m/s</p>		

1.4. INSTALLATION POSITION

HYDAC piston accumulators operate in any position. Vertical installation is preferable with the gas side at the top, to prevent contaminant particles from the fluid settling on the piston seals. For hydraulic accumulators with certain piston position indicators, vertical installation is essential.

1.5. TYPE OF INSTALLATION

For strong vibrations and volumes above 1 litre, we recommend the use of two HYDAC mounting clamps, or more as appropriate, ideally in the end cap area. See catalogue section:

- Mounting elements for hydraulic accumulators No. 3.502

1.6. ADVANTAGES

- Complete range with nominal volumes up to over 3300 litres possible
- High ratios possible between pre-charge pressure and max. operating pressure
- Economic solution using back-up gas bottles for low pressure differentials
- High flow rates possible; limitation: max. piston velocity
- Power savings
- High level of efficiency of the hydraulic system
- No sudden gas discharge when seals are worn
- Low space requirements
- Monitoring of the volume across the entire piston stroke or electrical limit switch

Further advantages of using the low-friction sealing system:

- Minimum friction
- Also suitable for low pressure differentials
- No start-up friction
- Depending on fluid, slow movements without stick-slip effect
- Low noise, no vibration
- High piston velocity up to 5 m/s for piston design 4
- Improved accumulator efficiency
- Good service life of seals due to low wear
- Suitable for large temperature fluctuations
- Low maintenance requirements

1.7. TECHNICAL REQUIREMENTS

HYDAC piston accumulators are suitable for high flow rates (e.g. 1000 l/s).

1.7.1 Effect of sealing friction

The permitted piston velocity depends on the sealing friction.

Higher piston velocities are possible where there is less sealing friction.

HYDAC piston accumulators of piston design 2 allow velocities of up to 3.5 m/s.

1.7.2 Permitted velocities

Gas velocity

The flow velocities in the gas side connection and pipe system should be limited to 30 m/s when using piston accumulators of the back-up type. Gas velocities of over 50 m/s should be avoided at all costs.

Oil velocity

In order to limit the pressure losses when the operating fluid is displaced, the flow velocity should not exceed 10 m/s in the fitting cross-section.

1.7.3 Function tests and fatigue tests

Function tests and fatigue tests are carried out to ensure continuous improvement of our piston accumulators.

By subjecting the accumulators to endurance tests under realistic as well as extreme working conditions, important data can be obtained about the long-term behaviour of the components. In the case of piston accumulators, important information on gas density and the service life of seals is gained from such tests.

Vital data for use in accumulator sizing is gained by altering the working pressure and switching cycles.

1.7.4 Gas charging

Hydraulic accumulators must only be charged with nitrogen. Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm). If other gases are to be used, please contact HYDAC for advice.

1.7.5 Working temperature and operating medium

The permitted working temperature of a piston accumulator is dependent on the application limits of the metal materials and the piston seal. Outside this temperature range, special materials must be used. The operating medium must also be taken into account. The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-20 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S)
		5	-40 °C ... + 80 °C	<ul style="list-style-type: none"> ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
PUR	Polyurethane	8	Standard application -30 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the HFA group 	<ul style="list-style-type: none"> ● Water and water-glycol mixture HFC ● Alkalis ● Acids
			Special application -40 °C ... +100 °C		
FKM	Fluorine rubber	6	-15 °C ... +160 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material and piston code, material of seals incl. piston seals

²⁾ Others available on request

1.8. PISTON POSITION INDICATORS


Examples of piston monitoring devices.

Further options for determining the piston position and detailed technical data available on request.

See also flyer:

- Monitoring systems for hydraulic accumulators
No. 3.506

1.8.1 Electrical limit switch

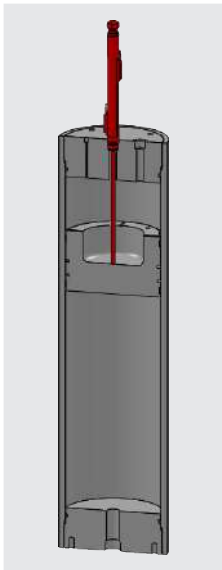

What is measured?

Max. or set fill level of the piston accumulator

How are measurements taken?

As point measurements

Where to measure?

Gas side

Identification in the model code:

A, B, C, ..., depending on stroke

Product information:

No. 10000769094

1.8.4 Piston position switch



What is measured?

Piston position via ultrasonic measurement

How are measurements taken?

As point measurements

Where to measure?

Fluid side


Identification in the model code:

UP...

Product information:

No. 10000769179

1.8.2 Magnetic flap indication

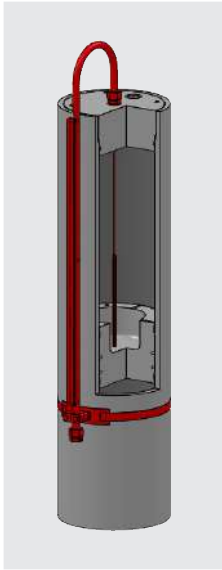

What is measured?

Piston position via a magnet fastened to the cable that moves coloured flaps that can be read from the outside

How are measurements taken?

Continuously

Where to measure?

Gas side

Identification in the model code:

M

Product information:

No. 10000769200

1.8.5 Linear position measurement system



What is measured?

Piston position via elapsed time measurement

How are measurements taken?

Continuously

Where to measure?

Gas side


Identification in the model code:

L

Product information:

No. 10000810655

1.8.3 Cable tension measurement system

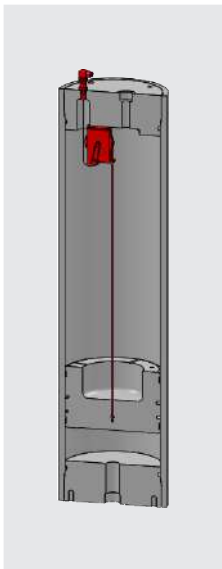

What is measured?

Piston position via a cable fastened to the piston

How are measurements taken?

Continuously

Where to measure?

Gas side


Identification in the model code:

S

Product information:

No. 10000641374

1.8.6 Laser linear position measurement system

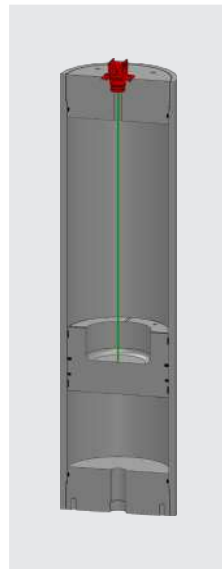

What is measured?

Piston position via laser elapsed time measurement

How are measurements taken?

Continuously

Where to measure?

Gas side

Identification in the model code:

LA

Product information:

No. 10000810664

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 **Nominal volume [l]**
See table in section 3.2.

2.1.2 **Eff. gas volume V_0 [l]**
This differs slightly from the nominal volume and forms the basis of the calculations of the effective fluid volume.
See section 3.3.

2.1.3 **Effective volume ΔV [l]**
Volume (fluid side) between operating pressures p_2 and p_1 .

2.1.4 **Permitted operating temperature of the hydraulic accumulator**
-10 °C ... +80 °C
Standard design, others on request

2.1.5 Certificate codes

Country	Certificate code (CC)
EU member states	U
Australia	F ¹⁾
Belarus	A6
Canada	S1 ¹⁾
China	A9
Hong Kong	A9
Iceland	U
Japan	P
Korea (Republic)	A11
New Zealand	T
Norway	U
Russia	A6
South Africa	S2
Switzerland	U
Turkey	U
Ukraine	A10
USA	S

¹⁾ Registration required in the individual territories or provinces.

Others on request

2.1.6 Notice

All work on HYDAC piston accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.301.BA

Assembly and repair instructions are available for work which may be carried out on the piston accumulator after installation and commissioning, e.g. repair work.
No. 3.301.M

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology
No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads
» Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible.

Order example. For further information, please contact HYDAC.

SK350 - 20 / 2212 U - 350 AAG - VA - 18 A - 1 - 050

Series

Nominal volume [l]

Material and piston code (MC)

Piston design (see section 1.3.)

Piston material

- 1 = aluminium
- 2 = carbon steel
- 3 = stainless steel ¹⁾

Material of cylinder and end cap

- 1 = carbon steel
- 2 = carbon steel with surface protection
- 3 = stainless steel ¹⁾
- 6 = carbon steel (low temperature)

Material of seals including piston seals

- 2 = NBR ²⁾ / PTFE compound
- 5 = NBR ²⁾ / PTFE compound
- 6 = FKM / PTFE compound
- 8 = NBR ²⁾ / PUR
- 9 = special qualities

Certification code

- U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Fluid port

- Type of connection (see Table 1)
- Standard or specification of the type of connection (see Tables 2 + 3)
- Size of connection (see Tables 4 + 5)

Gas-side connection or gas valve

- Type of connection (see Table 1)
- Standard or specification of the type of connection (see Tables 2 + 3)
- (no letter required with connection type V)
- Size of connection (see Table 4; 5 + 6)

Piston diameter

- 04 = 40 mm
- 05 = 50 mm
- 06 = 60 mm
- 08 = 80 mm
- 10 = 100 mm
- 12 = 125 mm
- 15 = 150 mm
- 18 = 180 mm
- 20 = 200 mm
- 25 = 250 mm
- 31 = 310 mm
- 35 = 355 mm
- 49 = 490 mm
- 54 = 540 mm
- 61 = 610 mm

Additional equipment*

Detailed technical data on request

- A = electrical limit switch – 35 mm stroke
- B = electrical limit switch – 200 mm stroke
- C = electrical limit switch – 500 mm stroke
- E.. = other electrical limit switch, fixed or adjustable
- K = protruding piston rod
- L = linear position measurement system
- LA = laser linear position measurement system
- M = magnetic flap indication
- S = cable tension measurement system
- U = ultrasonic measurement system
- UP.. = piston position switch
(e.g. UP2 = 2 position switches, UPEX = ATEX version)
- W = limit switch with linear position measurement system

Safety equipment*

- 1 = burst disc (please give nominal pressure and temperature)
- 2 = gas safety valve
- 3 = temperature fuse

Pre-charge pressure p_0 [bar] at 20 °C*

* If required, please state at time of ordering!

¹⁾ Dependent on type and pressure rating

²⁾ Observe temperature ranges, see section 1.7.

Table 1, Connection type

Code letter	Description
A	Threaded connection (internal thread)
B	Threaded connection (external thread)
F	Flange connection
H	Protruding flange
K, S	Combination connection / special connection
V	Gas valve type

Table 2, Threaded connection: standard or specification

Code letter	Description
A	Thread to ISO 228 (BSP)
B	Thread to DIN 13 or ISO 965/1 (metric)
C	Thread to ANSI B1.1 (UN...-2B, seal SAE J 514)
D	Thread to ANSI B1.20.3 (NPTF)

Table 3, Flange connection: standard or specification

Code letter	Description
A	Flanges to DIN standards (pressure rating + standard)
B	Flanges to ANSI B 16.5
C	SAE flange 3000 psi
D	SAE flange 6000 psi
E	High pressure block flange (Bosch-Rexroth) PN320
F	High pressure block flange (AVIT, HAVIT) PN320

Table 4, Threaded connection: sizes

Type listed in Table 2	Code letter, size										
	A	B	C	D	E	F	G	H	J	K	L
A	G 1/8	G 1/4	G 3/8	G 1/2	G 3/4	G 1	G 1 1/4	G 1 1/2	G 2	G 2 1/2	G 3
B	M10x1	M12x1.5	M14x1.5	M16x1.5	M18x1.5	M22x1.5	M27x2	M33x2	M42x2	M48x2	M60x2
C	5/16-24UNF	3/8-24UNF	7/16-20UNF	1/2-20UNF	9/16-18UNF	3/4-16UNF	7/8-14UNF	1 1/16-12UNF	1 3/16-12UNF	1 5/16-12UNF	1 5/8-12UNF
D	1/16-NPTF	1/8-NPTF	1/4-NPTF	3/8-NPTF	1/2-NPTF	3/4-NPTF	1-11 1/2 NPTF	1 1/4-11 1/2 NPTF	1 1/2-11 1/2 NPTF	2-11 1/2 NPTF	2 1/2 - NPTF

Table 5, Flange connection: sizes


Type listed in Table 3	Code letter, size										
	A	B	C	D	E	F	G	H	J	K	L
A	DN15	DN25	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200	–
B	1/2" - 1500 psi	1" - 1500 psi	1 1/2" - 1500 psi	2" - 1500 psi	2 1/2" - 1500 psi	3" - 1500 psi	1/2" - 2500 psi	1" - 2500 psi	1 1/2" - 2500 psi	2" - 2500 psi	2 1/2" - 2500 psi
C	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	5"
–									–	–	
E	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	–	DN 25	–
F									–	–	–

Table 6, Gas valve models

Code letter	Description
A	Gas valve G3/4 male, with M28x1.5/M8
B	Gas valve in end cap M28x1.5/M8
C	Gas valve 1/2"-20UNF, male, with M16x2 (ISO 10945)
D	Gas valve M14x1.5, male, with male M16x1.5 (Minimess)
E	Gas valve G3/4 male, with 7/8-14UNF-VG8
F	Gas valve in end cap M42x1.5/M12

3. TECHNICAL DATA

3.1. DRAWING

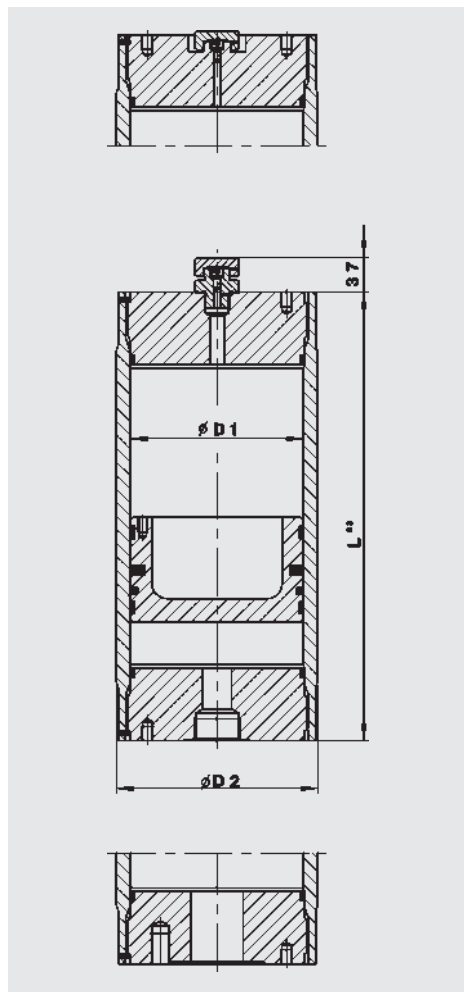

3.2. DIMENSIONS

Nom. volume V min. - max.	Series	Perm. operating pressure (PED) [bar]	$\varnothing D1$ [mm]	$\varnothing D2$ [mm]	Length calculation ¹⁾ $L = a + (b \cdot V)$		Weight ²⁾ min. - max. [kg]
					a [mm]	b [mm/l]	
0.2 – 5	SK350	350	60	80	126	353.7	6 – 35
0.5 – 10	SK350	350	80	100	157	198.9	11 – 48
0.5 – 15	SK350	350	100	125	184	127.3	19 – 85
1 – 50	SK350	350	125	160	185	81.5	32 – 280
2.5 – 70	SK210	210	150	180	210	56.6	47 – 280
	SK350	350			234		52 – 285
2.5 – 100	SK210	210	180	210	262	39.3	70 – 346
	SK350	350		220			79 – 458
2.5 – 200	SK210	210	200	235	290	31.8	100 – 690
	SK350	350					
10 – 200	SK210	210	250	286	408	20.4	173 – 731
	SK350	350		300			204 – 999
25 – 400	SK350	350	310	350	462	13.2	390 – 1110
25 – 750	SK210	210	355	404	534	10.1	472 – 2154
	SK350	350		434			594 – 3413
200 – 1300	SK210	210	490	570	700	5.3	1589 – 4492
	SK350	350					
300 – 3300	SK210	210	610	691	856	3.42	2500 – 11000
	SK350	350		710			

¹⁾ The lengths calculated are usually rounded up or down in 5 mm increments

²⁾ Intermediate weights can be calculated approximately depending on the length/diameter required

Other pressures, volumes, approvals etc. possible on request.

3.3. EFFECTIVE GAS VOLUME V_0

The gas volume V is larger than the nominal volume given in the table in section 3.2. by the amount shown below.

Piston $\varnothing D1$ [mm]	Piston design			
	1	2	3	4
	$\Delta[l]$			
60	–	0.040	0.038	0.040
80	–	0.044	0.081	0.044
100	0.062	0.062	0.270	0.062
125	–	0.169	0.546	0.169
150	–	0.653	0.824	0.653
180	1.213	1.213	1.286	1.213
200	–	0.999	1.601	0.999
250	3.034	3.034	2.617	3.034
310	–	6.221	–	6.221
355	4.514	4.514	–	4.514
490	–	12.705	–	12.705

3.4. VERSIONS

Piston design 2 (depending on version aluminium or carbon steel)

Carbon steel, NBR / PTFE

Nominal volume	Series	Perm. operating pressure (PED)	Part no. ¹⁾	Ø D1	Ø D2 ±3	L	Gas side connection	Fluid side connection	Weight	
[l]		[bar]		[mm]	[mm]	[mm]		ISO 228	[kg]	
10	SK350	350	3946133	150	180	800	M28x1.5	G 3/4	76	
			3946157				G 3/4			
			3946158				gas valve			77
20	SK350	350	3946159	150	180	1365	M28x1.5	G 3/4	111	
			3946161				G 3/4		112	
			3946164				gas valve		119	
	SK210	210	210	3946260	180	210	1050	G 3/4	G 3/4	120
				3946262				G 1 1/2	118	
				3586466				gas valve	119	
				3123789				G 1 1/2	118	
32	SK350	350	3946195	150	180	2045	M28x1.5	G 3/4	152	
			3946196				G 3/4			
			3946198				gas valve			153
			3946330	180	220	1520	G 3/4	G 3/4	193	
			3112126				G 1 1/2	189		
			3946331				gas valve	G 3/4	194	
	3123473	G 1 1/2	190							
	SK210	210	210	3946297	180	210	1520	G 3/4	G 3/4	153
				3152988				G 1 1/2		
				3946298				gas valve	G 3/4	
				3123470				G 1 1/2	150	
	SK350	350	350	3946383 ²⁾	200	235	1310	G 3/4	G 3/4	174
				3946396 ²⁾				gas valve		175
	50	SK350	350	3946332	180	220	2225	G 3/4	G 3/4	262
				3213717				G 1 1/2	250	
3946333				gas valve				G 3/4	262	
3123505				G 1 1/2				251		
SK210		210	210	3946301	180	210	2225	G 3/4	G 3/4	203
				3823656				G 1 1/2		
				3946302				gas valve	G 3/4	
				3280844				G 1 1/2	201	
SK350		350	350	3946399 ²⁾	200	235	1880	G 3/4	G 3/4	228
				3946402 ²⁾				gas valve		229
				3221083 ²⁾	250	300	1425	G 3/4	G 1 1/2	339
				3946442 ²⁾				gas valve		341
75	SK350	350	3946403 ²⁾	200	235	2675	G 3/4	G 3/4	302	
			3946438 ²⁾				gas valve		303	
100	SK350	350	3484504 ²⁾	250	300	2445	G 3/4	G 1 1/2	512	
			3946475 ²⁾				gas valve		514	

¹⁾ Preferred models, others on request

²⁾ Material and piston code (MC) = 2112, see Model code, section 2.2.


Notice:

Dimensions, particularly lengths, are approximate and dependent on various factors (e.g. piston design, approval).

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses caused by physical properties.


4. SPARE PARTS

Piston design 1

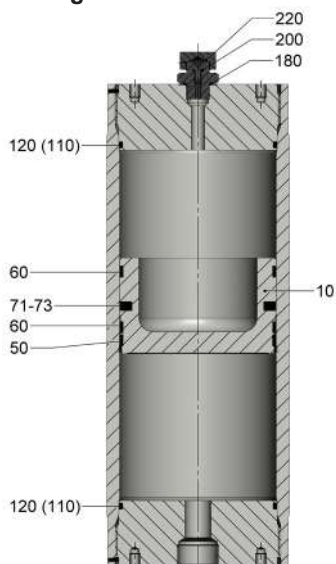


Description	Qty.	Item
Piston assembly ²⁾ consisting of:		
Piston	1	10
Seal ring	1	50
Guide ring	2	60
Centre seal	1	71-73
Seal kit consisting of:		
Seal ring	1	50
Guide ring	2	60
Centre seal	1	71-73
(Support ring)	(2)	(110)
O-ring	2	120
O-ring	1	180
Seal ring	1	200
O-ring	1	220

Piston design 2

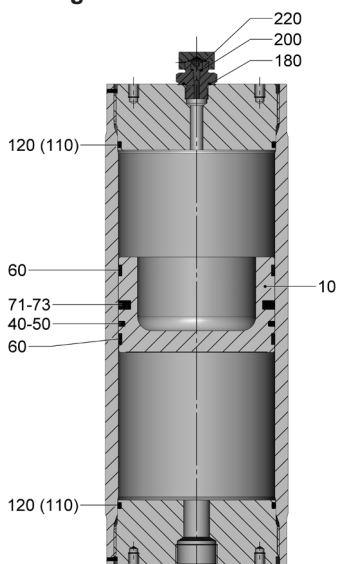

Description	Qty.	Item
Piston assembly ²⁾ consisting of:		
Piston	1	10
Seal ring	1	40+50
Guide ring	2	60
Centre seal	1	71-73
Seal kit consisting of:		
Seal ring	1	40+50
Guide ring	2	60
Centre seal	1	70-73
(Support ring)	(2)	(110)
O-ring	2	120
O-ring	1	180
Seal ring	1	200
O-ring	1	220

Piston design 3

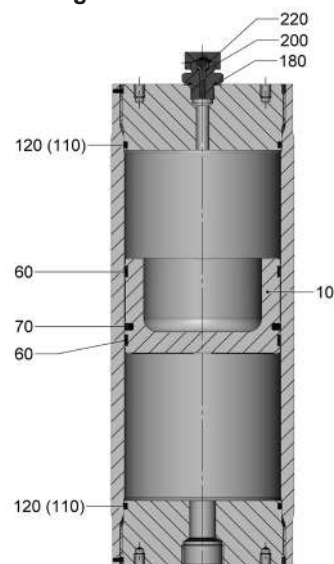

Description	Qty.	Item
Piston assembly ²⁾ consisting of:		
Piston	1	10
Guide ring ¹⁾	1/2	60
Seal ring	1	70
Seal kit consisting of:		
Guide ring ¹⁾	1/2	60
Seal ring	1	70
(Support ring)	(2)	(110)
O-ring	2	120
O-ring	1	180
Seal ring	1	200
O-ring	1	220

Pressure-bearing parts cannot be supplied as spares.
(...) for SK690 and standard SK, internal diameters 310 mm and above


¹⁾ The bottom guide ring for internal diameters 180 mm and above

²⁾ Items (110), 120, 180, 200 and 220 are enclosed unassembled.

Spare parts for piston design 4 are available on request.

4.1. PISTON AND SEAL KIT

Piston design 1

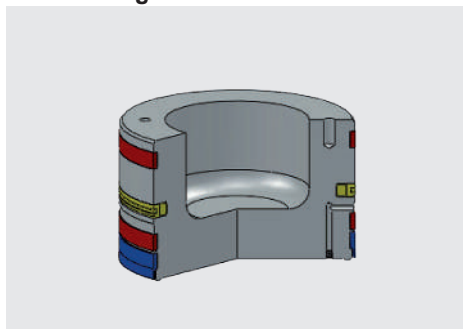


Piston assembly

Piston Ø [mm]	NBR / PTFE Part no.	FKM / PTFE Part no.
60	–	–
80	–	–
100	3128922	3128926
125	–	–
150	–	–
180	3141888	3182493
200	–	–
250	3128924	3128938
310	–	–
355	3128925	3128939
490	–	–

Seal kit

Piston Ø [mm]	NBR / PTFE Part no.	FKM / PTFE Part no.
60	–	–
80	–	–
100	3128940	3128944
125	–	–
150	–	–
180	3128941	3128945
200	–	–
250	3128942	3128946
310	–	–
355	3128943	3128947
490	–	–

Piston design 2

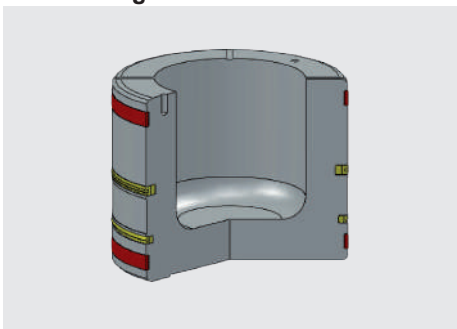


Piston assembly

Piston Ø [mm]	NBR / PTFE Part no.	FKM / PTFE Part no.
60	3183495	–
80	3183496	3183497
100	3175476	3183117
125	3016232	3016253
150	3016228	3016229
180	2118451	2112535
200	3110811	3016215
250	353980	353981
310	3016195	3016197
355	356382	354079
490	3128989	3128990

Seal kit

Piston Ø [mm]	NBR / PTFE Part no.	FKM / PTFE Part no.
60	3090507	–
80	3041573	3015745
100	363268	363269
125	3116665	3016234
150	3016235	3016237
180	363270	363271
200	3110810	3016242
250	363266	363267
310	3016200	3016201
355	363272	363273
490	3104100	3128991

Piston design 3

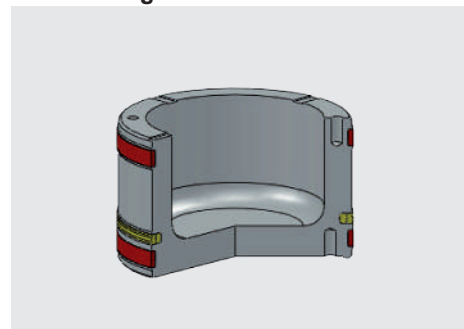

Piston assembly

Piston Ø [mm]	NBR / PUR Part no.
60	3009372
80	2119931
100	2115547
125	3016150
150	3016231
180	3046277
200	3016218
250	3016171
310	–
355	4323005
490	4323006

Seal kit

Piston Ø [mm]	NBR / PUR Part no.
60	3016210
80	3013230
100	2123414
125	2128104
150	3007546
180	2123415
200	3113127
250	3016213
310	4374872
355	3726888
490	3894300

Pressure-bearing parts cannot be supplied as spares.

Spare parts for piston design 4 are available on request.

4.2. ASSEMBLY INSTRUCTIONS

Special assembly sleeves are needed to assemble the piston and seals, see:

Assembly and repair instructions for piston accumulators

No. 3.301.M

5. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Piston Accumulators Series SK280

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.


The compressibility of a gas (nitrogen) is utilised in hydraulic accumulators for storing fluids. HYDAC piston accumulators are based on this principle.

A piston accumulator consists of a fluid section and a gas section with the piston acting as a gas-tight separation element. The gas section is pre-charged with nitrogen.

The fluid section is connected to the hydraulic circuit so that the piston accumulator draws in fluid when the pressure increases and the gas is compressed.

When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

1.2. DESIGN

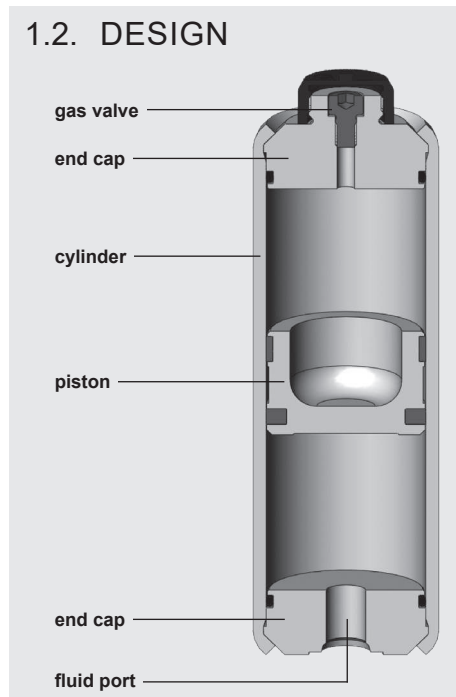

HYDAC piston accumulators consist of:

- A cylinder with very finely machined internal surface
- End caps on the gas side and the oil side, sealed with O-rings
- A floating steel or aluminium piston
- A sealing system adapted to the particular application

The piston floats on guide rings which prevent metal-to-metal contact between the piston and the accumulator wall. Suitable materials are also available for low temperature applications.

1.3. ADVANTAGES

- Optimised production process, saving on material and manufacturing costs
- Reduced-weight series
- Reduced installation space
- Standard gas valve M28x1.5 integrated into end cap (non-rechargeable version possible)
- Endurance-tested (function and fatigue tests)

1.4. TYPE OF INSTALLATION

HYDAC can provide suitable accumulator clamps for the piston accumulator series SK280. The table in section 3 lists the appropriate clamps for each individual diameter. In order to prevent deformation of the cylinder, we recommend that the accumulators are mounted using two clamps, one at each end cap.

1.5. DESIGN PRESSURE

- Standard 280 bar
- Manufactured and inspected in accordance with European Pressure Equipment Directive (PED)

Higher pressures on request

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses caused by physical properties.

1.6. SEALING SYSTEM

- Piston design 3: NBR/PUR
- Standard temperature range: -20 °C ... + 80 °C
- Extended temperature range: -40 °C ... +100 °C

For further information, please turn to the section:

- Piston accumulators
Standard design
No. 3.301

1.7. NOTICE

All work on HYDAC piston accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.301.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

2. SPECIFICATIONS

2.1. MODEL CODE

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

SK280 - 1 / 3218 U - 280 AAD - VB - 05 - 030

Series

Nominal volume [l]

Material and piston code (MC)

Piston design
(see section 1.6.)

Piston material
2 = carbon steel

Material of cylinder and end cap
1 = carbon steel
6 = carbon steel (low temperature)

Material of seals including piston seals
8 = NBR/PUR (polyurethane)

Certification code
U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Fluid port
AAD = threaded connection to ISO 228 size G 1/2

AAE = threaded connection to ISO 228 size G 3/4

AAF = threaded connection to ISO 228 size G 1

ACE = threaded connection to SAE J 514 size 9/16-18UNF, SAE #6

ACF = threaded connection to SAE J 514 size 3/4-16UNF, SAE #8

ACH = threaded connection to SAE J 514 size 1 1/16-12UN, SAE #12

ACK = threaded connection to SAE J 514 size 1 5/16-12UN, SAE #16

Gas-side connection or gas valve
VB = gas valve type M28x1.5/M8 integrated into end cap
000 = non-rechargeable version (see drawing, section 3.1.) on request


Piston diameter
05 = 50 mm

Pre-charge pressure p_0 [bar] at 20 °C, must be stated clearly, if required!


Other sizes and versions on request

3. DIMENSIONS

3.1. TYPE -000- (non-rechargeable)

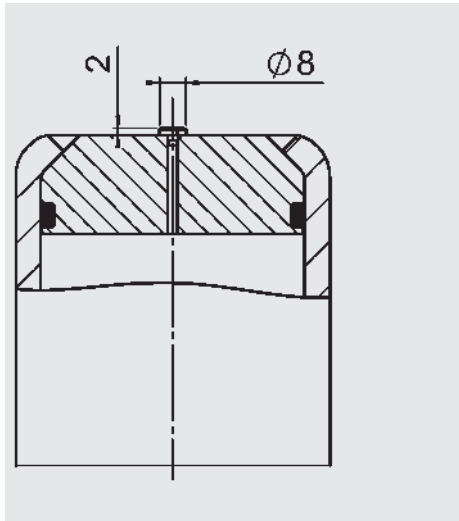

3.2. TYPE -VB- (rechargeable)

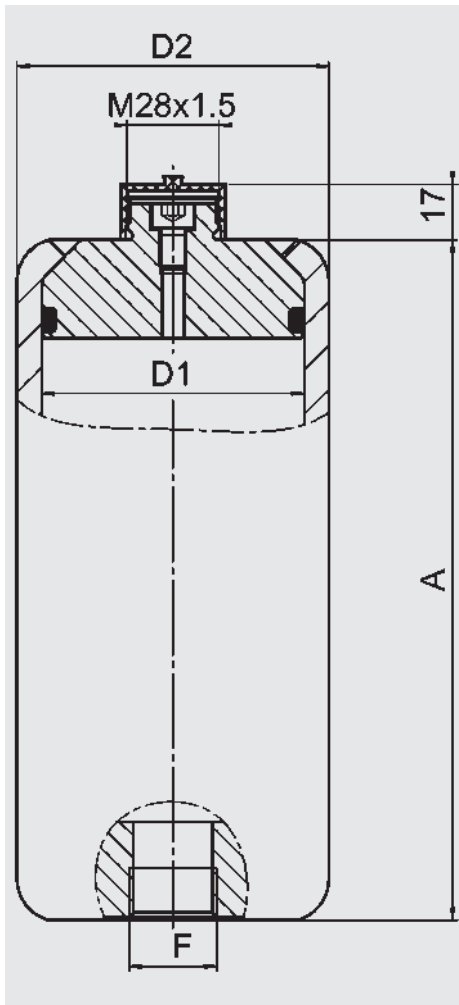

Nominal volume [l]	D1 [mm]	D2 [mm]	A ±3 [mm]	Perm. operating pressure 280 bar (PED) Carbon steel, NBR/PUR				Weight [kg]	Mounting clamps ²⁾	
				to ISO 228		to SAE J 514				
				F	Part no. ¹⁾	F	Part no. ¹⁾			
0.16	50	60	160	G 1/2	3200525	9/16-	-	2	3018442 HRGKSM 0 R 58-61/62 ST	
0.32					3200521	18UNF	-	2.5		
0.5					3200528	-	-	3.1		
0.75					3200522	3/4-	-	4		
1					3200523	16UNF	-	4.8		
0.32	60	75	205	G 1/2	3200524	3/4-	-	4	444912 HRGKSM 0 R 73-76/76 ST	
0.5					3200546		-	4.7		
0.75					3200547		-	5.8		
1					3200548		-	6.9		
1.5					3200549		-	9.1		
2					3200550		-	11.4		
2.5					3200551		-	13.6		
0.5					3200552		-	6.5		444995 HRGKSM 0 R 92-95/96 ST
0.75					3200553		-	7.2		
1	3200554	-	8							
1.5	3200557	-	9.5							
2	3200558	1 1/16-	-	11.5						
2.5	3200559	12UN	-	13						
3	3200560	-	14.5							
3.5	3200561	-	16							
4	3200562	-	17.5							
0.75	100	120	235	G 1	3200563	1 5/16-	3984528	11.7	444505 HRGKSM 1 R 119-127/124 ST	
1					3200564		3984529	12.5		
1.5					3200565		3984530	14.3		
2					3200566		3984531	16		
2.5					3984479		3984533	18		
3					3200568		3984534	19.5		
3.5					3984478		3984555	21.5		
4					3200569		3984556	23		
5					3200570		3984557	26.3		
6					3200571		3984558	30		
4	125	150	445	G 1	4092344	1 5/16-	4092420	29	444321 HRGKSM 1 R 146-154/151 ST	
5					4092395		4092421	32.5		
6					4092396		4092422	36		
7					4092397		4092423	39.5		
8					4092398		4092424	43		
9					4092399		4092445	46.5		
10	4092400	4092446	50							
6	150	175	467	G 1	4289054	1 5/16-	-	39.4	444402 HRGKSM 2 R 172-180/178 ST	
8					4289105		-	45.1		
10					4289106		-	50.8		
12					4289108		-	56.5		
15					4289109		-	65.1		

¹⁾ Preferred models, others on request

²⁾ Clamps must be mounted near the end caps in order to prevent deformation of the cylinder; for further information see the following catalogue section:

- Mounting elements for hydraulic accumulators
No. 3.502

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Piston Accumulators

High pressure

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas is utilised in hydraulic accumulators for storing fluids.

HYDAC piston accumulators are based on this principle, using nitrogen as the compressible medium.

A piston accumulator consists of a fluid section and a gas section with the piston acting as a gas-tight separation element. The gas section is pre-charged with nitrogen.

The fluid section is connected to the hydraulic circuit so that the piston accumulator draws in fluid when the pressure increases and the gas is compressed. When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

HYDAC piston accumulators can be used in a wide variety of applications and are also available in different pressure ranges, see also catalogue sections:

- Piston accumulators
Standard design
No. 3.301
- Piston accumulators
Series SK280
No. 3.303

1.2. DESIGN

The high pressure piston accumulator consists of:

- A cylinder with very finely machined internal surface
- End caps on the gas side and the oil side
- O-ring seals
- Floating metal piston
- High pressure sealing system

The piston floats on guide rings which prevent metal-to-metal contact between the piston and the accumulator wall.

For use with certain aggressive or corrosive fluids, the parts coming into contact with the fluid can be nickel plated for protection or made entirely from corrosion-resistant material. Suitable materials are also available for low temperature applications.

When supplied piston accumulators are suitable for short-term storage. Accumulators suitable for long-term storage are available on request.

1.3. SEALING SYSTEMS

Precise information about the intended operating conditions is required in order to select the most appropriate sealing system for the field of application. Important criteria for this selection are, for example, the:

- Design pressure
- Actual pressure differential
- Switching frequency or switching cycle
- Piston velocity
- Operating temperature
- Operating fluid
- Cleanliness of fluid (filtration rating)
- Maintenance requirements

For high-pressure piston accumulators, an advanced piston design 2 is used which has been modified for applications up to 1000 bar.

Hydraulic accumulators must only be operated with pressure fluids with a minimum cleanliness class of:

- NAS 1638 Class 6 or
- ISO 4406 Class 17/15/12

1.4. INSTALLATION POSITION AND TYPE OF INSTALLATION

HYDAC piston accumulators operate in any position. Vertical installation is preferable with the gas side at the top, to prevent contaminant particles from the fluid settling on the piston seals.

Information on secure installation and mounting elements can be found in the following catalogue sections:

- Piston accumulators
Standard design
No. 3.301
- Mounting elements for hydraulic accumulators
No. 3.502

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Operating pressure

690 bar / 800 bar / 1000 bar

Others on request

2.1.2 Permitted operating temperature of the hydraulic accumulator

-20 °C ... +50 °C

Standard design, others on request

2.1.3 Working temperature and operating medium

The permitted working temperature of a piston accumulator is dependent on the application limits of the metal materials and the piston seal. Outside this temperature range, special materials must be used. The operating medium must also be taken into account.

The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-20 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones
		5	-40 °C ... + 80 °C	<ul style="list-style-type: none"> ● Water ● Sea water 	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Fuels
FKM	Fluorine rubber	6	-15 °C ... +160 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material and piston code, material of seals including piston seals

²⁾ Others available on request

2.1.4 Gas charging

Hydraulic accumulators must only be charged with nitrogen.

Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm).

If other gases are to be used, please contact HYDAC for advice.

2.1.5 Notice

All work on HYDAC piston accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.301.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:

www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible.

Order example. For further information, please contact HYDAC.

SK690 - 1 / 2212 U - 690 ADE - VB - 08 UP2 - 1 - 300

Series

Nominal volume [l]

Material and piston code (MC)

Piston design

High pressure piston 2

Piston material

2 = carbon steel

3 = stainless steel ¹⁾

Material of cylinder and end cap

1 = carbon steel

3 = stainless steel ¹⁾

Material of seals including piston seals

2 = NBR ²⁾ / PTFE

6 = FKM / PTFE

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Fluid port

Type of connection (see Table 1)

Standard or specification of the type of connection (see Table 2)

Size of connection (see Table 3)

Gas side connection or gas valve

Type of connection (see Table 1)

Standard or specification of the type of connection (see Table 2)

Size of connection (see Table 3)

Piston diameter

08 = 80 mm

12 = 125 mm

15 = 150 mm

18 = 180 mm

Additional equipment*

Detailed technical data on request

M = magnetic flap indication

UP.. = piston position switch

(e.g. UP2 = 2 position switches, UPEX = ATEX version)

Safety equipment*

1 = burst disc (please give nominal pressure and temperature)

Pre-charge pressure p_0 [bar] at 20 °C*

* If required, please state at time of ordering!

¹⁾ Dependent on type and pressure rating

²⁾ Observe temperature ranges, see section 2.1.3

Table 1, Connection type

Code letter	Description
A	Threaded connection (internal) → Table 2 and then 3
K	High pressure port → Table 4
V	Gas valve port → Table 5
S	Special port on request

Table 2, Threaded connection: standard or specification

Code letter	Description
A	Thread to ISO 228 (BSP)
B	Thread to DIN 13 or ISO 965/1 (metric)
C	Thread to ANSI B1.1 (UN...-2B, seal SAE J 514)
D	Thread to ANSI B1.20.3 (NPTF)

Table 3, Threaded connection: sizes

Type listed in Table 2	Code letter, size						
	A	B	C	D	E	F	G
A	G 1/8	G 1/4	G 3/8	G 1/2	G 3/4	G 1	G 1 1/4
B	M10x1	M12x1.5	M14x1.5	M16x1.5	M18x1.5	M22x1.5	M27x2
C	5/16-24UNF	3/8-24UNF	7/16-20UNF	1/2-20UNF	9/16-18UNF	3/4-16UNF	7/8-14UNF
D	1/16-27 NPTF	1/8-27 NPTF	1/4-18 NPTF	3/8-18 NPTF	1/2-14 NPTF	3/4-14 NPTF	1-11 1/2 NPTF

Table 4, Connection size for preferred high pressure ports (e.g. Maximator)


	Code letter, size						
	KCQ	KCR	KCT	KUR	KUY	KWB	KWP
1. Connection	13/16-16UNF (9MF)	13/16-16UNF (9MF)	9/16-18UNF (6MF)	9/16-18UNF (6MF)	1 3/8-12UNF (16MF)	9/16-18UNF (6MF)	3/4-16UNF (6HF)
2. Connection	13/16-16UNF (9MF)	-	-	9/16-18UNF (6MF)	-	G 3/4-ISO228	-

Other connections on request

Table 5, Gas valve port

Code letter	Description
B	Gas valve end connection M28x1.5/M8 (max. pre-charge pressure 800 bar with FPU-2)
M	Gas valve, male, for high pressure port 9/16-18UNF (6MF) (no limit for pre-charge pressure)

3. DIMENSIONS

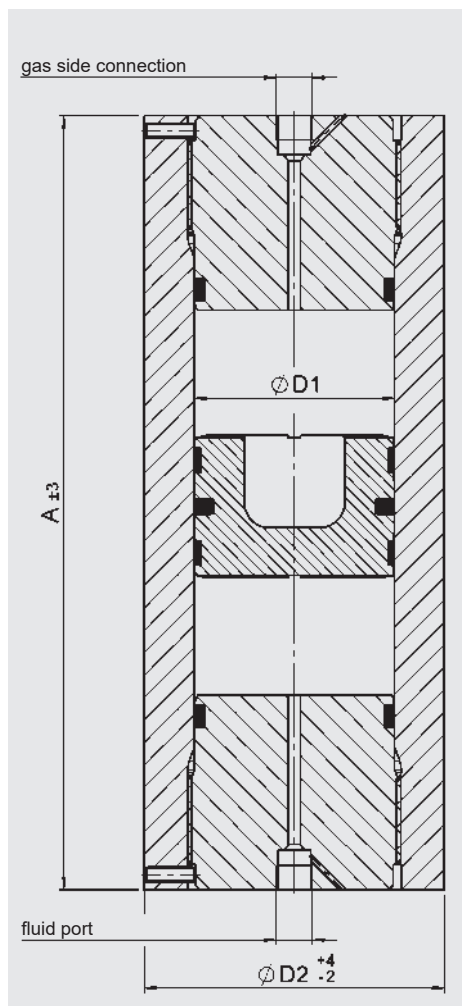

3.1. SERIES: SK690

Max. permitted operating pressure: 690 bar (PED)

Volume [l]	Ø D1 [mm]	Ø D2		A [mm]	Approx. weight	
		Carbon steel [mm]	Stainless steel [mm]		Carbon steel [kg]	Stainless steel [kg]
0.5 - 10	80	107	110	280 - 2170	15 - 74	16 - 83
1 - 20	125	160	160	295 - 1845	37 - 133	37 - 133
5 - 30	150	190	200	535 - 1950	75 - 194	88 - 241
5 - 50	180	246	220	480 - 2250	136 - 443	94 - 269

3.2. SERIES: SK800

Max. permitted operating pressure: 800 bar (PED)

Volume [l]	Ø D1 [mm]	Ø D2		A [mm]	Approx. weight	
		Carbon steel [mm]	Stainless steel [mm]		Carbon steel [kg]	Stainless steel [kg]
0.5 - 10	80	107	110	280 - 2170	15 - 74	16 - 83
1 - 20	125	162	160	295 - 1845	38 - 140	37 - 133
5 - 30	150	185	200	535 - 1990	80 - 182	87 - 240
5 - 50	180	246	224	480 - 2250	136 - 443	100 - 293

3.3. SERIES: SK1000

Max. permitted operating pressure: 1000 bar (PED)

Volume [l]	Ø D1 [mm]	Ø D2		A [mm]	Approx. weight	
		Carbon steel [mm]	Stainless steel [mm]		Carbon steel [kg]	Stainless steel [kg]
0.5 - 10	80	120	119	310 - 2200	23 - 117	22 - 113
1 - 20	125	172	164	295 - 1840	44 - 178	40 - 148
5 - 30	150	200	250	575 - 1990	100 - 253	179 - 529
5 - 50	180	246	280	555 - 2325	168 - 475	229 - 732

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses caused by physical properties.

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Diaphragm Accumulators

1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas is utilised in hydraulic accumulators for storing fluids.

HYDAC diaphragm accumulators are based on this principle, using nitrogen as the compressible medium.

Diaphragm accumulators consist of a fluid section and a gas section with the diaphragm acting as a gas-tight separation element.

The fluid section is connected to the hydraulic circuit so that the diaphragm accumulator draws in fluid when the pressure increases and the gas is compressed. When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

Set into the base of the diaphragm is a valve plate. This shuts off the hydraulic outlet when the accumulator is completely empty and thus prevents damage to the diaphragm.

Notice:

HYDAC diaphragm accumulators when fitted with a HYDAC safety and shut-off block comply with the regulations of the European Pressure Equipment Directive (PED) and the German Industrial Safety Regulations (Betr.Sich.V.).


See catalogue section:

- Safety and shut-off block SAF/DSV No. 3.551

1.2. DESIGN

HYDAC diaphragm accumulators are available in two versions.


1.2.1 Weld type

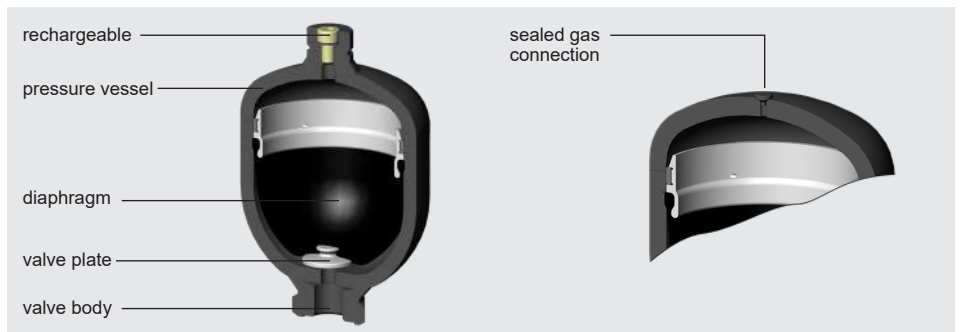

This consists of:

- Welded pressure vessel, rechargeable on the gas side or, alternatively, completely sealed. Fluid port available in various types.
- Diaphragm to separate the fluid and gas sections.
- Valve plate set into the base of the diaphragm.

1.2.2 Screw type

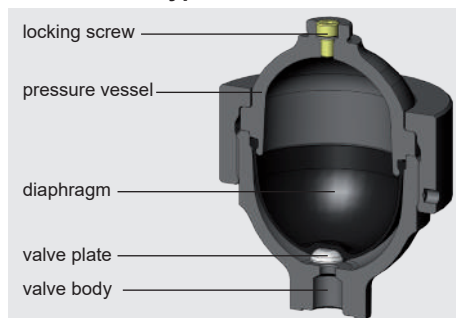

This consists of:

- Forged upper section with gas charging connection.
- Forged lower section with fluid port.
- Exchangeable flexible diaphragm to separate the gas and fluid.
- Vulcanised valve plate set into the base of the diaphragm.
- Lock nut to hold the upper and lower sections of the accumulator together.

1.2.3 Diaphragm material

The diaphragm material must be selected in accordance with the particular operating medium or operating temperature, see section 2.1. If discharge conditions are unfavourable (high p_2/p_0 pressure ratio, rapid discharge speed), the gas may cool to below the permitted temperature. This can cause cold cracking. The gas temperature can be calculated using the HYDAC Accumulator Simulation Program **ASP**.

1.2.4 Corrosion protection

For use with chemically aggressive fluids the hydraulic accumulator can be supplied with corrosion protection, such as plastic coating or a galvanic or chemical surface protection. If this is insufficient, then almost all types can be supplied in stainless steel.

1.3. INSTALLATION POSITION

Any position can be chosen. However, if there is a risk of contamination collecting, a vertical position is preferable (fluid port at the bottom).

1.4. TYPE OF INSTALLATION

Hydraulic accumulators up to a nominal volume of 2 l can be screwed directly inline.

Where strong vibrations are expected, the hydraulic accumulator must be secured to prevent it working loose. For weld type hydraulic accumulators we recommend HYDAC mounting clamps. For screw type diaphragm accumulators with a lock nut, a suitable support console can be ordered.

For an additional male thread on the hydraulic connection for screwing into mounting holes, see Table 3.1

See catalogue section:

- Mounting elements for hydraulic accumulators
No. 3.502

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Permitted operating pressure

See Tables 3.1. and 3.2.

The permitted operating pressure can differ from the nominal pressure for foreign test certificates.

2.1.2 Permitted operating temperature of the hydraulic accumulator

-10 °C ... +80 °C

Standard design, others on request

2.1.3 Nominal volume

See Tables 3.1. and 3.2.

2.1.4 Effective gas volume

Corresponds to the nominal volume of the diaphragm accumulator.

2.1.5 Effective volume

Volume of fluid which is available between the operating pressures p_2 and p_1 .

2.1.6 Gas charging

All accumulators are supplied with a protective pre-charge.
Higher gas pre-charge pressures are available on request (gas charging screw or sealed gas connection).

Hydraulic accumulators must only be charged with nitrogen.

Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm).

If other gases are to be used, please contact HYDAC for advice.

2.1.7 Limits for gas pre-charge pressure

$$p_0 \leq 0.9 \cdot p_1$$

For diaphragm accumulators with PTFE diaphragms, the following applies:

$$p_{0\max} \leq 200 \text{ bar}$$

For further information, see catalogue section:

- HYDAC Accumulator Technology
No. 3.000

2.1.8 Permitted pressure ratio

See Tables 3.1. and 3.2.

Ratio of max. operating pressure p_2 to gas pre-charge pressure p_0 .

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses due to physical properties.

2.1.9 Max. flow rate of the operating fluid

In order to achieve the max. flow rate given in the tables, a residual fluid volume of approx. 10 % of the effective gas volume must remain in the accumulator.

The maximum fluid flow rate was determined under specific typical conditions and is not applicable in all operating conditions.

2.1.10 Working temperature and operating medium

The permitted working temperature of a diaphragm accumulator is dependent on the application limits of the metal materials and the diaphragm. Outside this temperature range, special materials must be used. The operating medium must also be taken into account.

The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code ¹⁾	Temperature range	Overview of the fluids ²⁾	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S)
		5	-50 °C ... + 50 °C	<ul style="list-style-type: none"> ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
ECO	Ethylene oxide epichlorohydrin rubber	3	-40 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the group HFB ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
IIR	Butyl rubber	4	-50 °C ... +120 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
FKM	Fluorine rubber	6	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

¹⁾ See section 2.2. Model code, material code, diaphragm

²⁾ Others available on request

2.1.11 Certificate codes

Hydraulic accumulators which are installed in countries outside Germany are supplied with the test certificates required in that country. The user country must be stated at the time of ordering.

HYDAC pressure vessels can be supplied with virtually any test certificate.

Please note that the permitted operating pressure can differ from the nominal pressure.

The following table contains a few examples of the codes used in the model code for different countries of installation:

Country	Certificate code (CC)
EU member states	U
Australia	F ¹⁾
Belarus	A6
Canada	S1 ¹⁾
China	A9
Hong Kong	A9
Iceland	U
Japan	P
Korea (Republic)	A11
New Zealand	T
Norway	U
Russia	A6
South Africa	S2
Switzerland	U
Turkey	U
Ukraine	A10
USA	S

¹⁾ Registration required in the individual territories or provinces.

Others on request

2.1.12 Notice

All work on HYDAC diaphragm accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.100.BA

Detailed assembly and repair instructions are available for work which may be carried out on the diaphragm accumulator after installation and commissioning, e.g. repair work.

Further information such as accumulator dimensioning, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:

www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

SBO210 - 2 E1 / 112 U - 210 AK 050

Series

Nominal volume [l]

Type

Weld type:

- E1 = rechargeable M28x1.5
- E2 = sealed gas connection, with gas pre-charge as requested ¹⁾
- E3 = rechargeable, gas valve M16x1.5 / M14x1.5

Screw type

- A6 = rechargeable M28x1.5, exchangeable diaphragm
- A3 = gas valve M16x1.5 / M14x1.5, exchangeable diaphragm

Material code

dependent on operating medium
standard design = 112 for mineral oil

Fluid port

- 1 = carbon steel
- 3 = stainless steel ²⁾
- 4 = carbon steel with protective coating ³⁾
- 6 = low-temperature steel
- 7 = other materials

Accumulator shell

- 0 = plastic coating
- 1 = carbon steel
- 2 = carbon steel with protective coating ^{3) 4)}
- 4 = stainless steel ²⁾
- 6 = low-temperature steel
- 7 = other materials or material combinations

Diaphragm

- 2 = NBR ⁵⁾
- 3 = ECO
- 4 = IIR
- 5 = NBR ⁵⁾
- 6 = FKM
- 7 = other materials (e.g. PTFE, EPDM)

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Fluid port form

Standard connection = AK or AB

e.g. form AK = G 3/4
for SBO210-2 see section 3.

Pre-charge pressure p₀ [bar] at 20 °C, must be stated clearly, if required! ¹⁾

¹⁾ Only for E1 or E2 design, when ordered as standard

²⁾ Dependent on type and pressure level

³⁾ Only for screw type design

⁴⁾ Only for parts that come into contact with fluid

⁵⁾ Observe temperature ranges, see section 2.1.

3. TECHNICAL DATA

3.1. WELD TYPE

– non-exchangeable diaphragm –

3.1.1 Drawings

Fig.	Design	Gas side connection			Fluid side connection*	
		E1	E2	E3	AK	AB
1						
2			—			
3			On request			
4			—			

* = alternative connections on request

3.1.2 DIMENSIONS


Nom. vol. ¹⁾	Perm. press. ratio	Series	Certificate code U		R	ØD	Weight	Q ²⁾	Standard fluid port										Fig.					
			Perm. oper. pressure [bar]						Form AK					Form AB										
			Carbon steel	Stainless steel					F	ØG	L	B1	Hex. AF	F	H	L	B2	Hex. AF						
			[mm]	[mm]					[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]						
0.075	8:1	250	250	–	91	64	0.7	38	G 1/2	–	14	21	30	Not available					1					
0.16	8:1	210	210	180	103	74	0.8	38	G 1/2	–	14	21	30	Not available					1					
		300	300	–	108	78	1.1																	
0.32	8:1	100	100	–	116	90	0.9	95	G 1/2	–	14	21	30	Not available					1					
		210	210	160		93	1.3																	
		300	300	–		120	96													1.8				
0.5	8:1	160	160	–	130	102	1.3	95	G 1/2	–	14	21	30	G 1/2	M33x1.5	14	37	41	1					
		210	210	–	133	105	1.7																	
0.6	8:1	330	330	–	151	115	3.3	95	G 1/2	34	14	21	41	G 1/2	M33x1.5	14	37	41	1					
		350	350	–	130	121	3.5																	
0.7	8:1	100	100	–	151	106	1.8	95	G 1/2	34	14	21	41	G 1/2	M33x1.5	14	37	41	1					
		140	140	–	142	116	1.8																	
0.75	8:1	210	210	140	147	121	2.8	95	G 1/2	34	14	21	41	G 1/2	M33x1.5	14	37	41	1					
		250	250	–	152	126	3.6																	
		330	330	–	140	126	4																	
		300	300	–	140	126	4																	
1	8:1	200	200	–	159	136	3.6	95	G 1/2	34	14	21	41	G 1/2	M33x1.5	14	37	41	1					
		250	250	–	192	126	4.4																	
	330	330	–	169	126	4.8																		
1.4	8:1	140	140	–	173	145	3.9	95	G 1/2	34	14	21	41	G 1/2	M33x1.5	14	37	41	1					
		210	210	–	178	150	5.4																	
		250	250	–	185	153	5.9																	
		330	330	–	172	155	7.6																	
2	8:1	100	100	100	190	160	4	150	G 3/4	44	16	28	46	G 3/4	M45x1.5	16	33	46	1					
		210	210	–	198	167	6.6																	
	4:1	250	250	–	232	153	7.4																	
	8:1	330	330	–	181	172	9.2																	
2.8	4:1	210	210	–	250	167	8.2	150	G 3/4	44	16	28	46	G 3/4	M45x1.5	16	33	46	2					
		250	250	–	250	170	9.5																	
	6:1	330	330	–	237	172	11					43	46							44	46	42	46	
					231																			44
					274																			
3.5	4:1	250	210	–	306	170	11.2	150	G 3/4	44	16	28	46	G 3/4	M45x1.5	16	33	46	2					
		330	330	–	274	172	13.8																	
4	4:1	50	–	50	294	158	5	150	G 3/4	44	16	44	46	G 3/4	M45x1.5	16	33	46	2					
		250	–	180	306	170	11.2																	

¹⁾ Others on request

²⁾ Max. flow rate of operating fluid

3.2. SCREW TYPE – exchangeable diaphragm –

3.2.1 Drawings

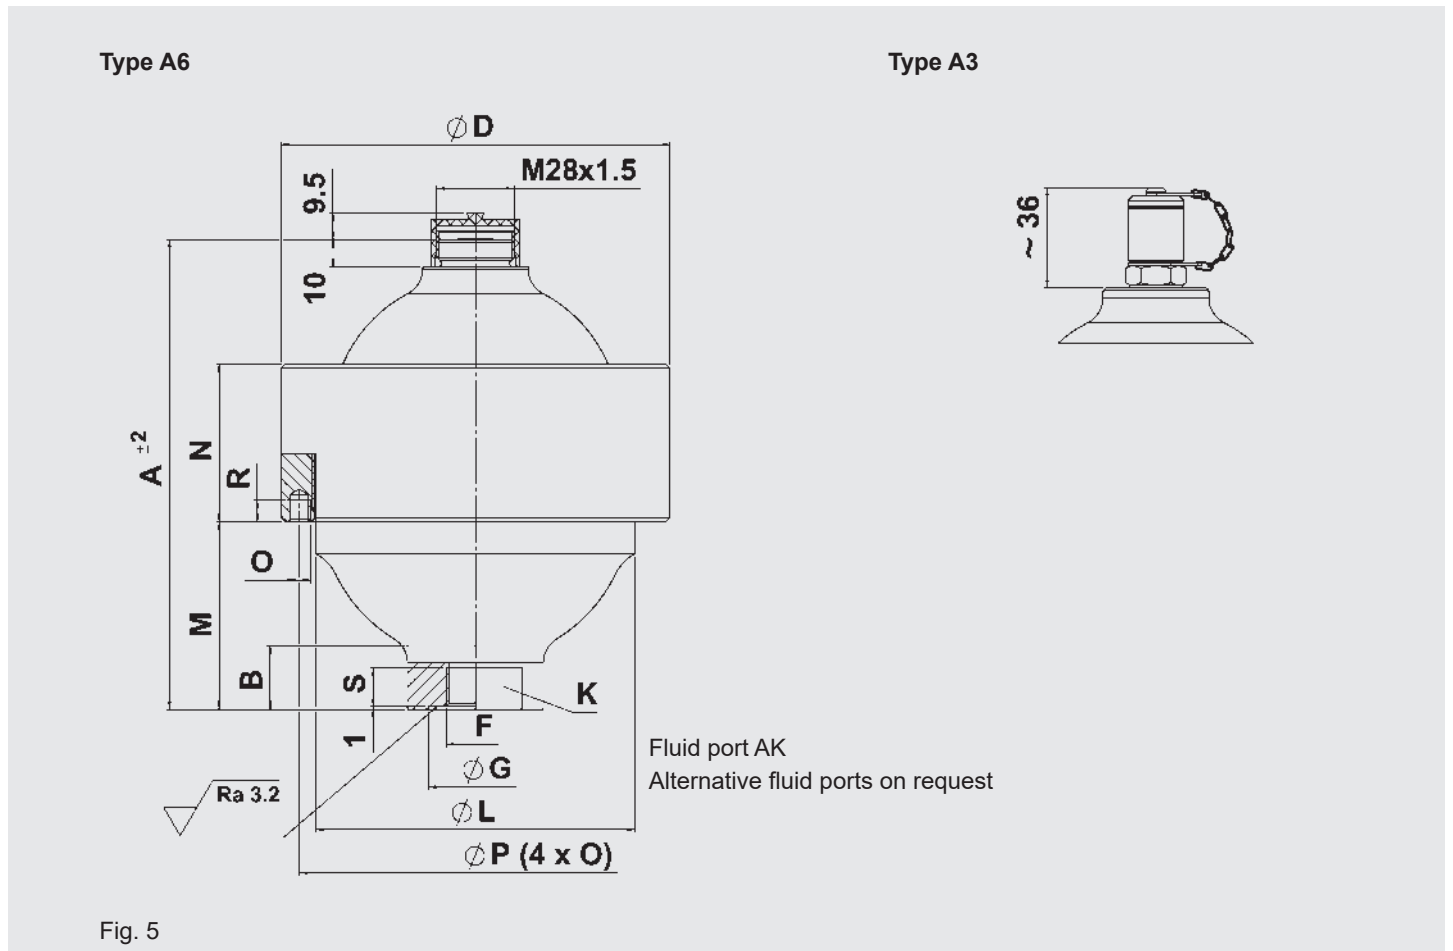

3.2.2 Dimensions

Nom. vol. ¹⁾	Perm. press. ratio $p_2 : p_0$	Series	Certificate code U		Weight [kg]	A [mm]	B [mm]	ØD [mm]	ØL [mm]	M [mm]	N [mm]	O [mm]	ØP [mm]	R [mm]	Q ²⁾ [l/min]	Standard fluid port				Fig.
			Perm. oper. pressure [bar]													Form AK				
			Carbon steel	Stainless steel												F ISO 228	S [mm]	ØG [mm]	K AF	
0.1	10:1	500	500	–	1.9	110	30	95	–	53	35	–	–	–	95	G 1/2	14	–	36	5
0.25	10:1	500	500	–	3.9	129	20	115	92	56	56	–	–	–	95	G 1/2	14	–	36	
			–	350	4.9			125										60		
		750	–	750	9	136	11	153	114	57.5	63	M6	140	12						
0.6	10:1	450	450	250	5.7	170	19	140	115	68	57	–	–	–	95	G 1/2	14	34	41	
1.3	10:1	400	400	–	11.2	212	28	199	160	97	65	M8	180	10	150	G 3/4	16	44	50	
2	10:1	250	250	180	11.4	227	17	201	168	101	64	M8	188	10	150	G 3/4	16	44	50	
2.8	10:1	400	400	–	22	257	30	252	207	106	80	M8	230	10	150	G 3/4	16	44	50	
4	10:1	400	400	–	34	284	30	287	236	127.5	90	M8	265	10	150	G 3/4	16	44	50	


¹⁾ Others on request

²⁾ Max. flow rate of operating fluid

4. SPARE PARTS

4.1. WELD TYPE

– non-exchangeable diaphragm –

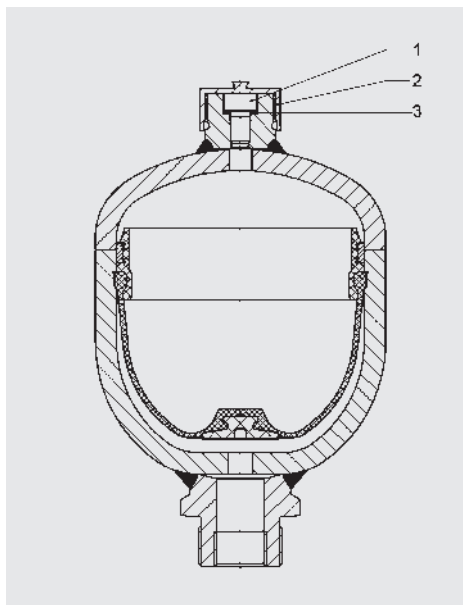


Description	Quantity	Item
Spare parts set for gas side		
consisting of:		
Locking screw	20	1
Protective cap	20	2
Seal ring	20	3

Nominal volume [l]	Part no.				
	NBR	ECO	FKM	IIR	PTFE
Spare parts set for gas side					
0.075 - 4	3262845	-	-	-	-

4.2. SCREW TYPE

– exchangeable diaphragm –

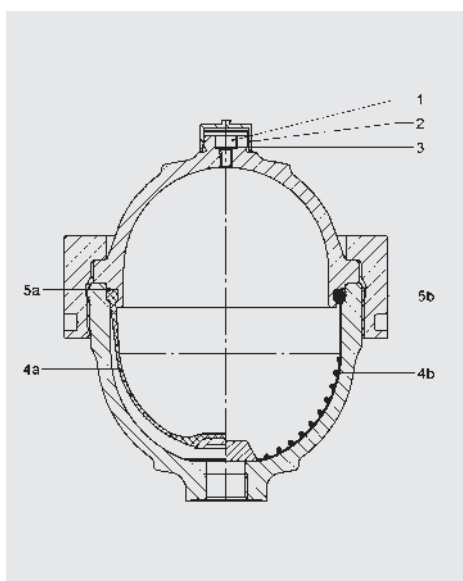

Description	Quantity	Item
Spare parts set for gas side		
consisting of:		
Locking screw	20	1
Protective cap	20	2
Seal ring	20	3

Spare parts kit for elastomer diaphragm		
consisting of:		
Locking screw	1	1
Seal ring	1	3
Elastomer diaphragm	1	4a
Support ring	1	5a

Spare parts kit for PTFE diaphragm		
consisting of:		
Locking screw	1	1
Seal ring	1	3
PTFE diaphragm	1	4b
O-ring	1	5b

Nominal volume [l]	Part no.				
	NBR	ECO	FKM	IIR	PTFE
Spare parts set for gas side					
0.1 - 4	3262845	-	-	-	-
Spare parts kit					
0.1	3042668	3182526	-	-	-
0.25	3042709	3042712	3042714	3042713	3504798
0.6	3042710	3042715	3042717	3042716	3550388
1.3	3042681	3042682	3042684	-	3446897
2	3042711	3042719	3042721	3042720	3464205
2.8	3042700	3042701	3042704	3042702	-
4	3042705	3042706	3042708	3042707	-

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.

HYDAC Technology GmbH
Industriegebiet
66280 Sulzbach/Saar, Germany
Tel.: +49 (0) 68 97 / 509 - 01
Fax: +49 (0) 68 97 / 509 - 464
Internet: www.hydac.com
E-mail: speichertechnik@hydac.com

Metal bellows accumulators



1. DESCRIPTION

1.1. FUNCTION

Fluids are practically incompressible and cannot therefore store pressure energy.

The compressibility of a gas is utilised in hydraulic accumulators for storing fluids. HYDAC metal bellows accumulators are based on this principle, using nitrogen as the compressible medium.

They consist of a fluid section and a gas section with metal bellows acting as a gas-tight separation element.

The fluid section is connected to the hydraulic circuit so that the metal bellows accumulator draws in fluid when the pressure increases and the gas is compressed. When the pressure drops, the compressed gas expands and forces the stored fluid into the circuit.

1.2. ADVANTAGES


The special features of the metal bellows accumulator are:

- No frictional parts, low-maintenance, long service life
- Media-resistant in temperature ranges of -65 °C to over +160 °C
- Gas-tight


1.3. DESIGN

The design of the HYDAC metal bellows accumulator can vary considerably depending on the customer requirements or field of application.

Example design of a metal bellows accumulator with corrugated bellows

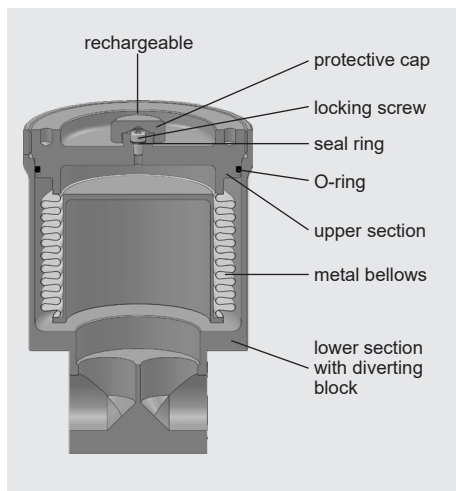


Example design of a metal bellows accumulator with diaphragm bellows

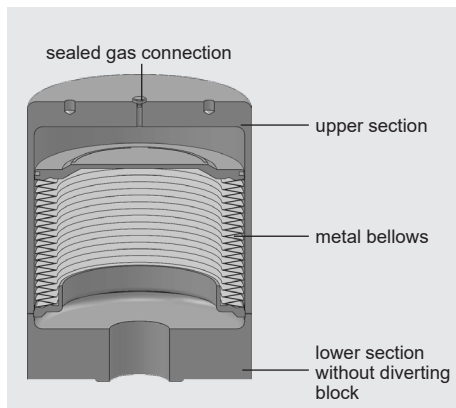

1.3.1 Bellows design

HYDAC supplies two types of bellows. The formed corrugated bellows and the welded diaphragm bellows.


Corrugated bellows (formed)



Properties:

- Suitable for high differential pressures
- Unsusceptible to contamination
- Robust

Diaphragm bellows (welded)



Properties:

- High displacement volumes
- Very good energy saving properties
- Compact design

1.3.2 Pressure vessel design

The pressure vessel of the metal bellows accumulator fundamentally comprises of an upper section and a lower section. These can be connected in a wide variety of ways.

The most common variants are listed below, others are available on request.

Screw type



Weld type



Formed type



1.4. MATERIALS

The selection of materials for the pressure vessel, metal bellows and sealing systems must be coordinated to suit the particular operating medium, operating temperature and pre-charge pressure.

Pressure vessel: carbon steel,
stainless steel

Metal bellows: stainless steel

Sealing system: NBR, FKM, etc.

See material code or on request.

1.5. CORROSION PROTECTION

The pressure vessel is fabricated in carbon steel or in stainless steel.

Various coating systems are available to protect carbon steel versions.

1.6. INSTALLATION POSITION

Metal bellows accumulators are preferably to be installed vertically, with the gas charging connection at the top. Other installation positions must be agreed with HYDAC.

1.7. TYPE OF INSTALLATION

HYDAC mounting elements must be used to securely fasten metal bellows accumulators.

1.8. CLEANLINESS

Diaphragm bellows accumulators must only be operated with hydraulic fluids that contain no hard particles and that have a minimum cleanliness class of:

- NAS 1638 Class 6 or
- ISO 4406 Class 17/15/12

Furthermore, the fluid must not solidify at any time.

2. SPECIFICATIONS

2.1. EXPLANATIONS, NOTES

2.1.1 Explanatory notes

HYDAC metal bellows accumulators are made with tailor-made designs and material selections. Because of their special properties, they are an outstanding addition to the HYDAC hydraulic accumulator product range. We are always happy to provide detailed advice.

2.1.2 Notice

All work on HYDAC metal bellows accumulators must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions and the product-specific documents must be observed!

No. 3.304.BA

Detailed assembly and repair instructions are available for work which may be carried out on the metal bellows accumulator after installation and commissioning, e.g. repair work. No. 3.304.M

Further information such as accumulator dimensioning, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

2.2. MODEL CODE

Not all combinations are possible.

Order example. For further information, please contact HYDAC.

SM50 P - 0.5 W E 1/ 116 U - 50 AAJ - 2.5

Series

Type code

No details = without diverting block

P = with diverting block

L = light-weight

Nominal volume [l]

Version

W = corrugated bellows

M = diaphragm bellows

Type of shell

A = screw type

E = weld type

G = formed type

Type of gas side connection

1 = gas pressure adjustable (M28x1.5)

2 = gas pressure pre-set, non-adjustable gas locking screw

3 = gas pressure adjustable (M16x1.5)

Material code

Fluid port

1 = carbon steel

2 = carbon steel with corrosion protection

3 = stainless steel ¹⁾

Accumulator shell

1 = carbon steel

2 = carbon steel with corrosion protection

4 = stainless steel ¹⁾

Seal material

0 = no seal

2 = NBR

6 = FKM

7 = other materials

9 = FFKM

Certification code

U = PED 97/23/EC ²⁾

Permitted operating pressure [bar]

Fluid port

See tables in catalogue section Piston accumulators, No. 3.301

Pre-charge pressure p_0 [bar] at 20 °C

If required, please state at time of ordering!


¹⁾ Dependent on type and pressure rating

²⁾ Other approvals possible, see catalogue section HYDAC Accumulator Technology, No. 3.000

3. FUNCTION AND APPLICATION EXAMPLES

3.1. ENERGY STORAGE

The stored hydraulic energy is available from the accumulator for the following purposes: reserve pump capacity (emergency function, pump support) and leakage compensation.



Application examples in the aviation industry




Application:
Supporting the working hydraulics for flight control



Accumulator type:
SM209
Nominal volume:
Up to 0.4 litres
Material:
Stainless steel
Version:
Diaphragm bellows

3.2. PULSATION DAMPING

Pressure pulsations are smoothed by the compressible gas inside the accumulator, e.g. suction flow stabilisation, reduction in noise level and vibrations.



Application examples in large diesel engines



Application:
Pulsation damping
Fuel system
Large diesel engines



Accumulator type:
SM50P and SM50
Nominal volume:
3.8 and 1.6 litres
Material:
Carbon steel, coated
Version:
Corrugated bellows

Application examples in the aviation industry




Application:
Suction flow stabiliser
Hydraulic line
Engine supply



Accumulator type:
SM16
Nominal volume:
1 litre
Material:
Stainless steel
Version:
Diaphragm bellows
Special feature:
Visual condition check

Application examples in the chemical industry/process technology

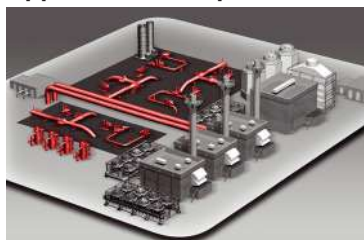


Application:
Suction flow stabiliser
3-piston pump



Accumulator type:
SM210
Nominal volume:
2 litres
Material:
Stainless steel
Version:
Diaphragm bellows
Special feature:
Flange connection

3.3. VOLUME COMPENSATION

The hydraulic accumulator compensates for surplus volume, for instance when the volume of the fluid increases due to an increase in temperature.



Application examples in the chemical industry/process technology



Application:
Volume compensation when temperature fluctuates



Accumulator type:
SM16
Nominal volume:
1 litre
Material:
Stainless steel
Version:
Diaphragm bellows



Accumulator type:
SM16
Nominal volume:
9.4 litres
Material:
Stainless steel
Version:
Diaphragm bellows
Special feature:

- High displacement volume
- Compact bellows design

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described.
For applications and/or operating conditions not described, please contact the relevant technical department.
Subject to technical modifications.

HYDAC Technology GmbH
Industriegebiet
66280 Sulzbach/Saar, Germany
Tel.: +49 (0) 68 97 / 509 - 01
Fax: +49 (0) 68 97 / 509 - 464
Internet: www.hydac.com
E-mail: speichertechnik@hydac.com

Hydraulic dampers



1. DESCRIPTION

1.1. FUNCTION

The pressure fluctuations occurring in hydraulic systems can be cyclical or one-off problems due to:

- Flow rate fluctuations from displacement pumps
- Actuation of shut-off and control valves with short opening and closing times
- Switching on and off of pumps
- Sudden linking of spaces with different pressure levels


HYDAC hydraulic dampers are particularly suitable for damping such pressure fluctuations.

Selecting the most suitable hydraulic damper for each system ensures that:

- Vibrations caused by pipes, valves, couplings etc. are minimised and subsequent pipe and valve damage is prevented
- Measuring instruments are protected and their performance is no longer impaired
- The noise level in hydraulic systems is reduced
- The performance of machine tools is improved
- Interconnection of several pumps in one line is possible
- A pump rpm and feed pressure increase is possible
- The maintenance and servicing costs can be reduced
- The service life of the system is increased

2. APPLICATION

2.1. PULSATION DAMPING TYPE SB...P / SBO...P

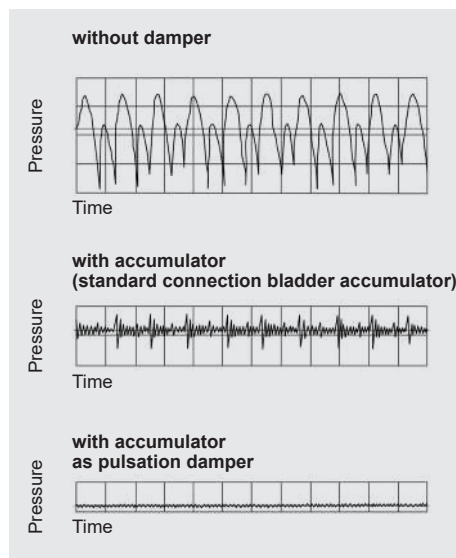

2.1.1 General

The HYDAC pulsation damper

- Prevents pipe breaks caused by material fatigue, pipe oscillations and irregular flow rates,
- Protects valves, control devices and other instruments,
- Improves noise level damping

2.1.2 Applications

The pulsation damper is particularly suitable for hydraulic systems, displacement pumps, sensitive measurement and control instruments and manifolds, e.g. in process circuits in the chemical industry.

2.1.3 Mode of operation

The pulsation damper generally has two fluid ports and can therefore be fitted directly inline.

The flow is diverted in the fluid valve so that it is directed straight at the bladder or diaphragm. This causes direct contact of the flow with the bladder or diaphragm which, in an almost inertia-less operation, balances the flow rate fluctuations via the gas volume.

It particularly compensates for higher frequency pressure oscillations. The charge pressure is adjusted to individual operating conditions.

2.1.4 Design

HYDAC pulsation dampers consist of:


- The welded or forged pressure vessel in carbon steel; available with internal coating or in stainless steel for chemically aggressive fluids
- The special fluid valve with inline connection, which guides the flow into the vessel (threaded or flange connection)
- The bladder or diaphragm in various elastomers as shown in section 4.1.

2.1.5 Installation

As close as possible to the pulsation source. Mounting position preferably vertical (gas valve pointing upwards).

Preferred and alternative installation positions are shown in schematic form in section 1.3.

2.2. SUCTION FLOW STABILISATION

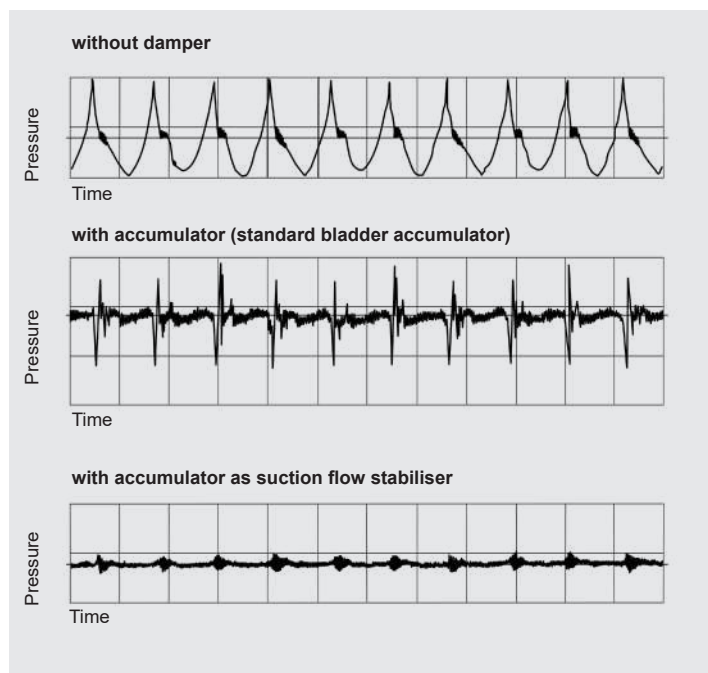

2.2.1 General

The HYDAC suction flow stabiliser

- Improves the NPSH value of the system
- Prevents cavitation of the pump
- Prevents pipe oscillations

2.2.2 Applications

Main application areas are piston and diaphragm pumps in public utility plants, reactor construction and the chemical industry.

2.2.3 Mode of operation

Trouble-free pump operation is only possible if no cavitation occurs in the pump suction and pipe oscillations are prevented.

A relatively high fluid volume in the suction flow stabiliser in relation to the displacement volume of the pump reduces the acceleration effects of the fluid column in the suction line. An air separation is also achieved due to the extremely low flow rate in the suction flow stabiliser and the deflection on a baffle. By adjusting the charging pressure of the bladder to the operating conditions, the best possible damping is achieved.

2.2.4 Design


The HYDAC suction flow stabiliser consists of a welded vessel in steel or stainless steel.

The inlet and outlet are on opposite sides and are separated by a baffle, other versions on request. The upper part houses the encapsulated bladder. In addition, there is a vent screw in the end cap and a drainage facility on the bottom.

2.2.5 Installation

As close as possible to the suction inlet of the pump. Vertical mounting position (gas valve pointing upwards).

2.3. SHOCK ABSORPTION

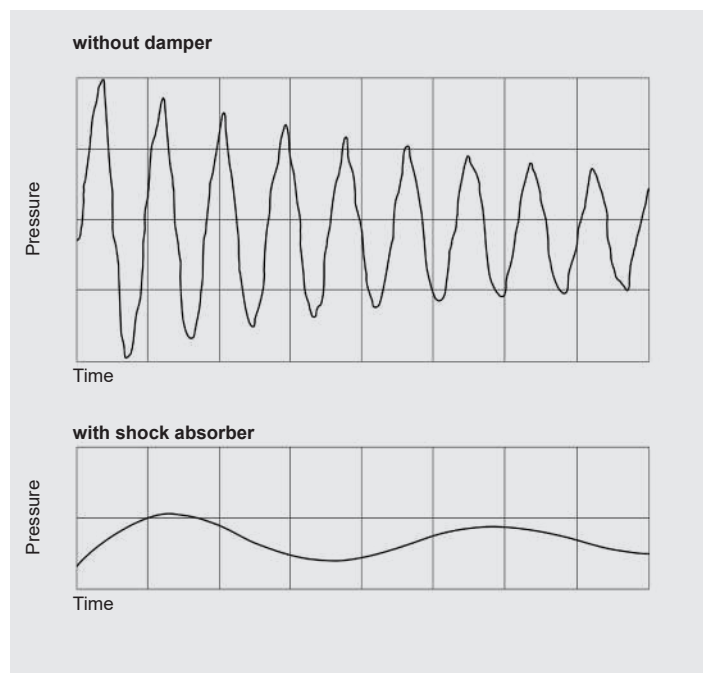

2.3.1 General

The HYDAC shock absorber

- Reduces pressure shocks
- Protects pipelines and valves from being destroyed

2.3.2 Applications

The accumulators are particularly suitable for use in pipelines with quick-acting valves or flaps and whilst pumps are being switched on and off.

They are also suitable for energy storage in low pressure applications.

2.3.3 Mode of operation

Sudden changes in pipeline flow, such as those caused by pump failure or the closing or opening of valves, can cause pressures which are many times higher than the normal values.

The shock absorber prevents this by converting potential energy into kinetic energy and vice versa. This prevents pressure shocks and protects pipelines, valves, monitoring instruments and other pipe fittings from destruction.

2.3.4 Design

The shock absorption can be provided by using bladder, piston and diaphragm accumulators. Further technical details on the individual accumulator types can be found in the following brochure sections:


- Bladder accumulators, low pressure
No. 3.202
- Bladder accumulators, standard design
No. 3.201
- Diaphragm accumulators
No. 3.100
- Piston accumulators, standard design
No. 3.301

2.3.5 Installation

As close as possible to the source of the erratic condition. Vertical mounting position (gas valve pointing upwards).

3 SIZING

3.1. PULSATION DAMPER AND SUCTION FLOW STABILISER

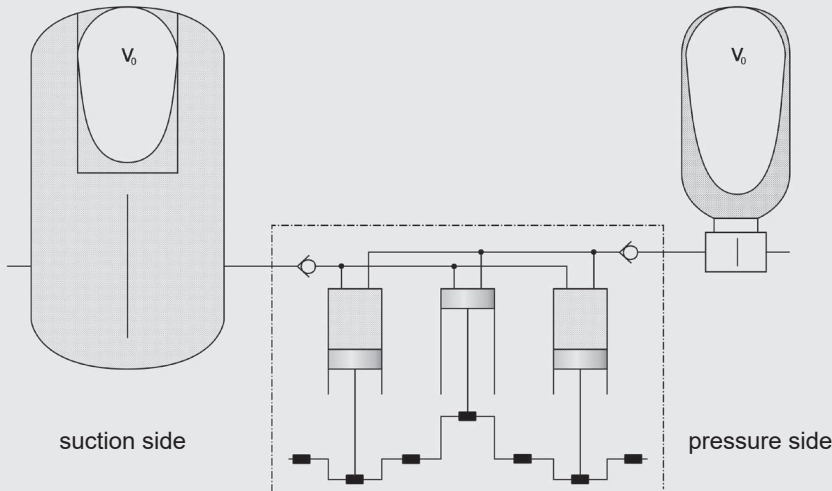

On the suction side and the pressure side of piston pumps there are almost identical conditions in terms of the irregularity of the flow rate. Therefore, the same formulae for determining the effective gas volume are used to calculate the damper size. The fact that two completely different damper types are ultimately used is due to the different acceleration and pressure ratios on the two sides.

When selecting the pulsation damper, it is not only the gas volume V_0 which is a decisive factor. The connection size of the pump also has to be taken into account. In order to avoid additional cross-section variations, which represent reflection points for vibrations, and to keep pressure drop to a reasonable level, the fitting cross-section of the damper must be the same as that of the pipeline.

The gas volume V_0 of the damper is determined with the aid of the formula for adiabatic changes of state.

By giving the residual pulsation or the gas volume, the damper size can be dimensioned with the aid of the HYDAC software **ASP** (Accumulator Simulation Program).

Designations:

ΔV = fluctuating fluid volume [l]

$$\Delta V = m \cdot q$$

q = stroke volume [l]

$$q = \frac{\pi \cdot d_k^2}{4} \cdot h_k$$

d_k = piston diameter [dm]

h_k = piston stroke [dm]

m = amplitude factor

$$m = \frac{\Delta V}{q}$$

z = no. of compressions/ effective cylinders per revolution


x = residual pulsation [\pm %]

κ = isentropic exponent

Φ = pressure ratio of pre-charge pressure to operating pressure [0.6 to 0.9]

$$\Phi = \frac{p_0}{p_m}$$

Δp = amplitude of pressure fluctuations
 $\Delta p = p_2 - p_1$ [bar]

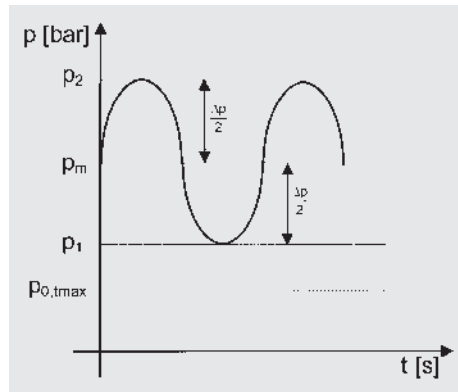

Formulae:

$$V_0 = \frac{\Delta V}{\left[\frac{\Phi}{1 - \frac{x}{100}} \right]^{\frac{1}{\kappa}} - \left[\frac{\Phi}{1 + \frac{x}{100}} \right]^{\frac{1}{\kappa}}}$$


$$\Delta V = m \cdot q$$

$$x [\pm \text{ \%}] = \left| \frac{p_1 - p_m}{p_m} \cdot 100 \right|$$


$$= \left| \frac{p_2 - p_m}{p_m} \cdot 100 \right|$$

Diagram of mounting options:


Preferred installation configuration with maximum damping effect

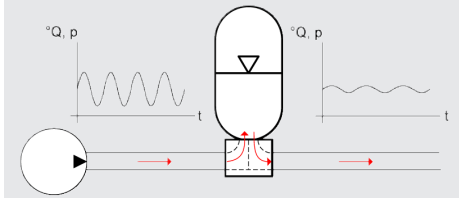

Alternative installation configuration using standard accumulator with a T-piece with reduced damping effect

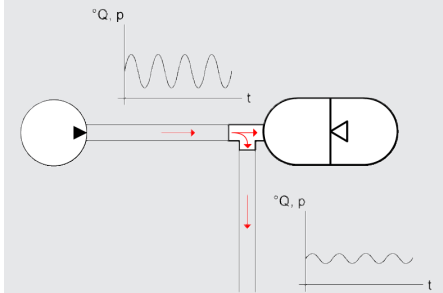

Isentropic exponent κ dependent on pressure and temperature:

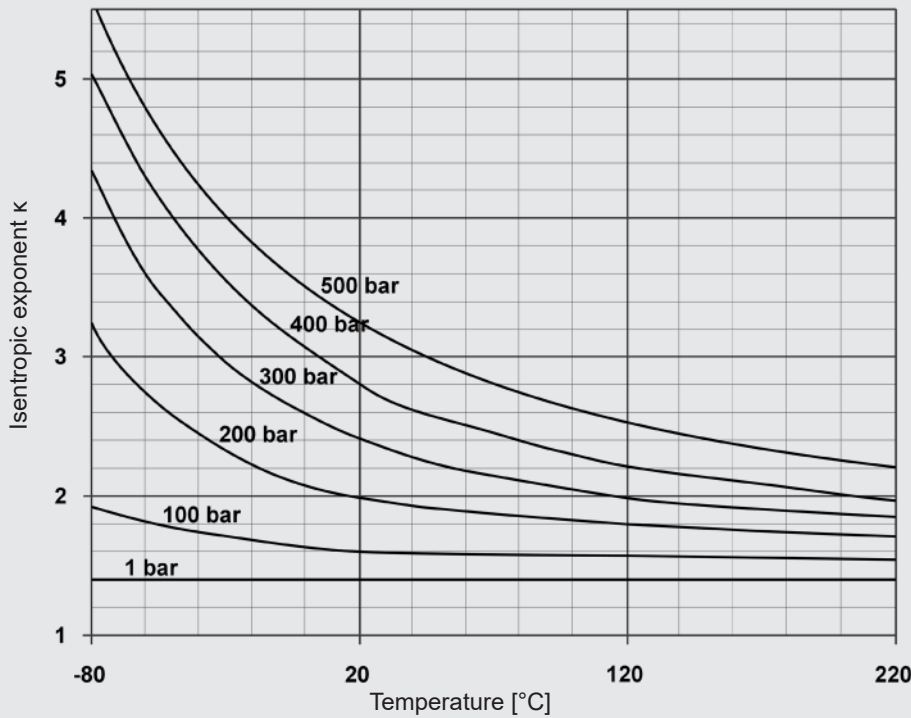

Amplitude factor (m) for piston pump:

z	m value	
	single acting	double acting
1	0.548	0.206
2	0.206	0.042
3	0.035	0.018
4	0.042	0.010
5	0.010	0.007
6	0.018	0.005
7	0.005	
8	0.010	
9	0.001	

Others on request

3.1.1 Calculation example

Given parameters:

Single-acting 3-piston pump
 Piston diameter: 70 mm
 Piston stroke: 100 mm
 Drive speed: 370 rpm
 Flow rate: 427 l/min
 Operating temperature: 20 °C
 Operating pressure
 – pressure side: 200 bar
 – suction side: 4 bar

Required:

- Suction flow stabiliser for a residual pulsation of $\pm 2.5\%$
- Pulsation damper for a residual pulsation of $\pm 0.5\%$

Solution:

- Determining the required suction flow stabiliser

$$V_0 = \frac{\Delta V}{\left[\frac{\Phi}{1 - \frac{x}{100}} \right]^{\frac{1}{\kappa}} - \left[\frac{\Phi}{1 + \frac{x}{100}} \right]^{\frac{1}{\kappa}}}$$

$$V_0 = \frac{0,035 \cdot \frac{\pi \cdot 0,7^2}{4} \cdot 1,0}{\left[\frac{0,6}{1 - \frac{2,5}{100}} \right]^{\frac{1}{1,4}} - \left[\frac{0,6}{1 + \frac{2,5}{100}} \right]^{\frac{1}{1,4}}}$$

$V_0 = 0.54 \text{ l}$

Selected: SB16S-12 with 1 litre gas volume

- Determining the required pulsation damper

$$V_0 = \frac{\Delta V}{\left[\frac{\Phi}{1 - \frac{x}{100}} \right]^{\frac{1}{\kappa}} - \left[\frac{\Phi}{1 + \frac{x}{100}} \right]^{\frac{1}{\kappa}}}$$


$$V_0 = \frac{0,035 \cdot \frac{\pi \cdot 0,7^2}{4} \cdot 1,0}{\left[\frac{0,7}{1 - \frac{0,5}{100}} \right]^{\frac{1}{2,0}} - \left[\frac{0,7}{1 + \frac{0,5}{100}} \right]^{\frac{1}{2,0}}}$$

$V_0 = 3.2 \text{ l}$

Selected: SB330P-4

3.2. SHOCK ABSORBER

Pressure shock produced when a valve is closed without a hydraulic accumulator

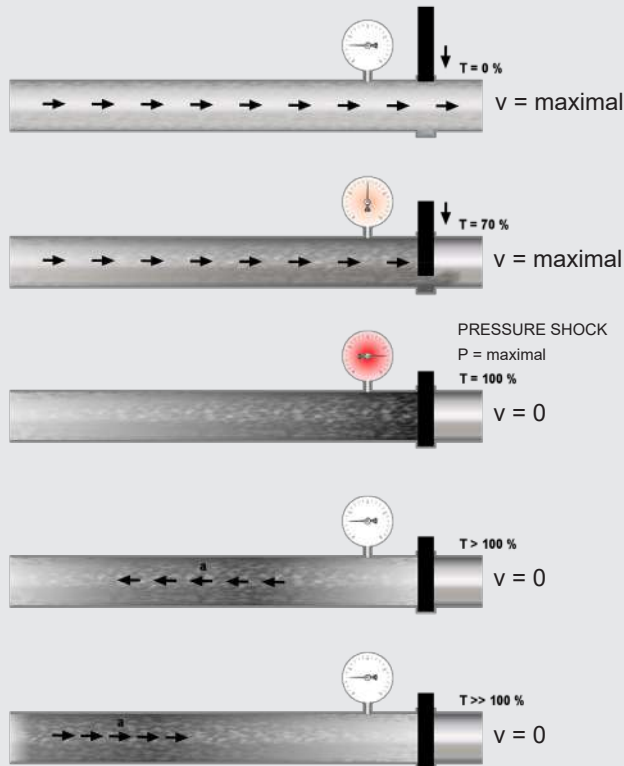

Simplified pressure shock calculation for the closing of a valve

Estimate of Joukowski's max. occurring pressure shock

$$\Delta p [\text{N/m}^2] = \rho \cdot a \cdot \Delta v$$

ρ [kg/m³] = fluid volume

$$\Delta v = v - v_1$$

Δv = change in fluid velocity

v [m/s] = fluid velocity before the change in its condition

v_1 [m/s] = fluid velocity after the change in its condition

a [m/s] = propagation velocity of pressure wave

$$a [\text{m/s}] = \frac{1}{\sqrt{\rho \cdot \left[\frac{1}{K} + \frac{D}{E \cdot e} \right]}}$$

K [N/m²] = compression modulus of the fluid

E [N/m²] = elasticity modulus of the pipeline

D [mm] = internal diameter of the pipeline

e [mm] = wall thickness of the pipeline

The pressure wave runs to the other end of the pipeline and will reach the valve again after time t (reflection time), whereby:

$$t [\text{s}] = \frac{2 \cdot L}{a}$$

L [m] = length of the pipeline

T [s] = eff. operating time (closing) of the valve

If $T < t$ then:

$$p_{\text{max}} = p_1 + \Delta p$$

If $T > t$ then:

$$p_{\text{max}} = p_1 + \rho \cdot a \cdot \Delta v \cdot \frac{t}{T}$$

Determining the required damper size

The accumulator must absorb the kinetic energy of the fluid by converting it into potential energy within the pre-determined pressure range. The change of state of the gas is adiabatic in this case.

$$V_0 = \frac{m \cdot \Delta v^2 \cdot 0,4}{2 \cdot p_1 \cdot \left[\left(\frac{p_2}{p_1} \right)^{\frac{1}{\kappa}} - 1 \right]} \cdot \left(\frac{p_1}{p_0} \right)^{\frac{1}{\kappa}}$$

m [kg] = weight of the fluid in the pipeline

v [m/s] = change in velocity of the fluid

p_1 [bar] = zero head of the pump

p_2 [bar] = perm. operating pressure

p_0 [bar] = pre-charge pressure

A special calculation program for analysing the pressure curve is available for manifold sizing or sizing with regards to pump failure or start-up.

3.2.1 Calculation example

Rapid closing of a shut-off valve in a re-fuelling line.

Given parameters:

Length of pipeline L:
2000 m

Size of pipeline D:
250 mm

Wall thickness of pipeline e:
6.3 mm

Material of the pipeline:
Steel

Flow rate Q:
432 m³/h = 0.12 m³/s

Density of medium ρ:
980 kg/m³

Zero feed height of pump p₁:
6 bar

Min. operating pressure p_{min}:
4 bar

Eff. closing time of valve T:
1.5 s
(approx. 20 % of total closing time)

Operating temperature:
20 °C

Compression modulus of fluid K:
1.62 × 10⁹ N/m²

Elasticity modulus (steel) E:
2.04 × 10¹¹ N/m²

Required:

Size of the required shock absorber, when the max. pressure (p₂) must not exceed 10 bar.

Solution:

Determination of reflection time:

$$a = \frac{1}{\sqrt{\rho \cdot \left[\frac{1}{K} + \frac{D}{E \cdot e} \right]}}$$

$$a = \frac{1}{\sqrt{980 \cdot \left[\frac{1}{1.62 \cdot 10^9} + \frac{250}{2.04 \cdot 10^{11} \cdot 6.3} \right]}}$$

$$a = 1120 \text{ m/s}$$

$$t = \frac{2 \cdot L}{a} = \frac{2 \cdot 2000}{1120} = 3.575 \text{ s}^*$$

* since $T < t$ the max. pressure shock occurs and the formula as shown in section 3.2. must be used.

$$v = \frac{Q}{A}$$

$$v = \frac{0.12}{0.25^2 \cdot \frac{\pi}{4}} = 2.45 \text{ m/s}$$

$$\Delta_p = \rho \cdot a \cdot \Delta v$$

$$\Delta_p = 980 \cdot 1120 \cdot (2.45 - 0) \cdot 10^{-5}$$

$$= 26.89 \text{ bar}$$

$$p_{\max} = p_1 + \Delta_p$$

$$p_{\max} = 6 + 26.89 = 32.89 \text{ bar}$$

Determining the required gas volume:

$$p_0 \leq 0.9 \cdot p_{\min}$$

$$p_0 \leq 0.9 \cdot 5 = 4.5 \text{ bar}$$

$$V_0 = \frac{m \cdot v^2 \cdot 0.4}{2 \cdot p_1 \cdot \left[\left(\frac{p_2}{p_1} \right)^{\frac{1}{\kappa}} - 1 \right] \cdot 10^2} \cdot \left(\frac{p_1}{p_0} \right)^{\frac{1}{\kappa}}$$

$$\text{with } m = V \cdot \rho = \frac{\pi}{4} \cdot D^2 \cdot L \cdot \rho$$

$$V_0 = \frac{\frac{\pi}{4} \cdot 0.25^2 \cdot 2000 \cdot 980 \cdot 2.45^2 \cdot 0.4}{2 \cdot 7 \cdot \left[\left(\frac{11}{7} \right)^{\frac{1}{1.4}} - 1 \right] \cdot 10^2} \cdot \left(\frac{7}{4.5} \right)^{\frac{1}{1.4}}$$

$$V_0 = 1641 \text{ l}$$

Selected:

4 shock absorbers
SB35AH-450

4. SPECIFICATIONS

4.1. EXPLANATIONS, NOTES

4.1.1 Operating pressure

See table for relevant series (may differ from nominal pressure for foreign test certificates).

4.1.2 Permitted operating temperatures

-10 °C ... 80 °C

Standard design, others on request

4.1.3 Nominal volume

See table for relevant series

4.1.4 Effective gas volume

See table for relevant series, based on nominal dimensions. This differs slightly from the nominal volume and must be used when calculating the effective fluid volume.

For diaphragm accumulators, the effective gas volume corresponds to the nominal volume.

4.1.5 Effective volume

Volume of fluid which is available between the operating pressures p_2 and p_1 .

4.1.7 Gas charging

Hydraulic accumulators must only be charged with nitrogen.

Never use other gases.

Risk of explosion!

In principle, only use nitrogen of at least Class 4.0 (filtration < 3 µm).

If other gases are to be used, please contact HYDAC for advice.

4.1.8 Limits for gas pre-charge pressure

Ratio of maximum operating pressure p_2 to gas pre-charge pressure p_0 .

The specified values are maximum values and must not be considered as referring to a permanent load. The tolerable pressure ratio is influenced by the geometry, temperature, fluid and flow rate as well as any gas losses due to physical properties.

See catalogue section:

- HYDAC Accumulator Technology No. 3.000
- Bladder accumulators Low pressure No. 3.202
- Bladder accumulators Standard design No. 3.201

4.1.9 Notice

All work on HYDAC hydraulic dampers must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

- Bladder accumulators No. 3.201.BA
- Diaphragm accumulators No. 3.100.BA
- Piston accumulators No. 3.301.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:

www.hydac.com » Downloads » Documents » Accumulator Division

4.1.6 Working temperature and operating medium

The permitted working temperature of a hydraulic damper is dependent on the application limits of the metal materials and the separation element. Outside this temperature range, special materials must be used. The operating medium must also be taken into account.

The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code 1)	Accumulator type	Temperature range	Overview of the fluids 2)	
					Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	SB, SBO	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
		5	SB, SBO	-50 °C ... + 50 °C		
		9	SB, SBO	-30 °C ... + 80 °C		
ECO	Ethylene oxide epichlorohydrin rubber	3	SB	-30 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the HFB group ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
			SBO	-40 °C ... +120 °C		
IIR	Butyl rubber	4	SB	-50 °C ... +100 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
			SBO	-50 °C ... +120 °C		
FKM	Fluorine rubber	6	SB, SBO	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

1) See section 4.2. Model code, material code, accumulator bladder/ diaphragm

2) Others available on request

4.2. MODEL CODE

Pulsation damper, suction flow stabiliser, shock absorber

Not all combinations are possible.

Order example. For further information, please contact HYDAC.

SB330 P - 10 A 1 / 112 U - 330 AI

Series

SB... = with bladder
SBO... = with diaphragm

Type code

A = shock absorber
AH = high flow shock absorber
P = pulsation damper
PH = high flow pulsation damper
S = suction flow stabiliser

Nominal volume [l]

Fluid Port

A = threaded connection
E = threaded connection for weld type construction (diaphragm accumulators only)
F = flange ¹⁾

Type code

1 = standard design (not for screw type diaphragm accumulators or shock absorbers)
2 = back-up version ²⁾
6 = standard design for screw type diaphragm accumulators of type SBO...P-...A6
7 = M28x1.5 gas valve (only for SB16/35)

Material code

dependent on operating medium
standard design = 112 for mineral oils

Fluid port

1 = carbon steel
2 = high tensile steel
3 = stainless steel ³⁾
4 = chemically nickel-plated (internal coating) ²⁾
6 = low temperature steel
7 = other materials

Accumulator shell

0 = plastic (internal coating) ²⁾
1 = carbon steel
2 = chemically nickel-plated (internal coating) ²⁾
4 = stainless steel ^{2) 3)}
6 = low temperature steel
7 = other materials

Accumulator bladder ⁴⁾ / diaphragm

2 = NBR ⁵⁾
3 = ECO
4 = IIR
5 = NBR ⁵⁾
6 = FKM
7 = other materials (e.g. PTFE, EPDM, ...)
9 = NBR ⁵⁾

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Connection

AI = ISO 228 (BSP), standard connection
BI = DIN 13 to ISO 965/1 (metric) ¹⁾
CI = ANSI B1.1 (UNF thread, sealing to SAE standard) ¹⁾
DI = ANSI B1.20 (NPT thread) ¹⁾

SBO250P-0.075E1 and for SBO210P-0.16E1:

AK = ISO 228 (BSP), standard connection

¹⁾ Specify full details of version

²⁾ Not available for all versions

³⁾ Dependent on type and pressure rating


⁴⁾ When ordering a spare bladder, please state diameter of the smallest shell port

⁵⁾ Observe temperature ranges, see section 4.1.6

4.3. DIMENSIONS AND SPARE PARTS

4.3.1 Pulsation damper bladder accumulator

SB330/550P(PH)-...

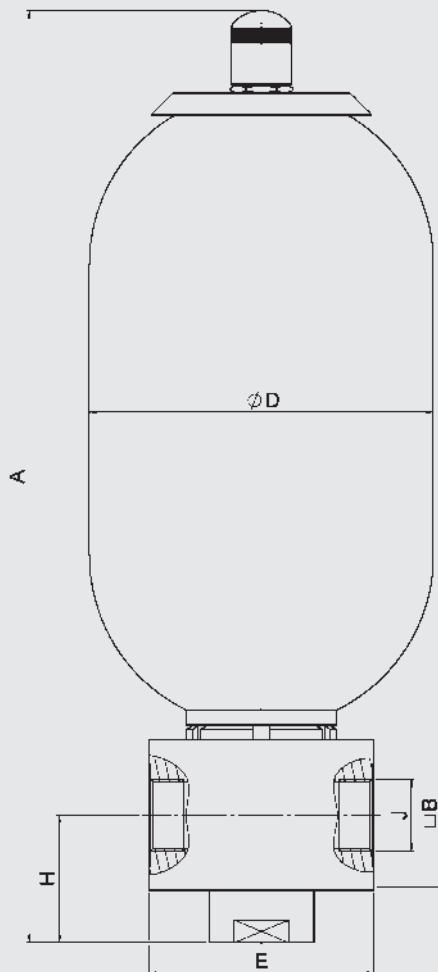

Dimensions SB

Carbon steel, NBR

Nominal volume [l]	Series ³⁾	Max. operating pressure (PED) [bar]	Part no.	Eff. gas volume [l]	A [mm]	□ B [mm]	Ø D [mm]	E [mm]	H [mm]	J ¹⁾ Thread ISO 228	Weight [kg]
1	SB330P	330	296114	1	365	80	118	120	57	G 1 1/4	11
	SB550P	550	3435597 ³⁾		384	70	121		53		13
2.5	SB330P	330	3078967	2.4	570	80	118	120	57	G 1 1/4	16
	SB550P	550	3576155 ³⁾	2.5	589	70	121		53		20
4	SB330P	330	3121155	3.7	455	80	171	150	57	G 1 1/2	18
	SB330PH		—		491	100			85		26
5	SB550P	550	4313259 ³⁾	4.9	917	70	121	120	53	G 1 1/4	26
6	SB330P	330	3140558	5.7	559	80	171	120	57	G 1 1/4	20
	SB330PH		—		593	100			85		28
10	SB330P	330	3082257	9.3	620	100	229	150	85	G 1 1/2	40
	SB330PH		—		652	130x140			100		SAE 2" - 6000 psi
13	SB330P	330	2107871	12	712	100	229	150	85	G 1 1/2	48
20	SB330P		3084825	18.4	920	100			85		70
	SB330PH	—	952		130x140	100	SAE 2" - 6000 psi	80			
24	SB330P	330	3152980	23.6	986	100	229	150	85	G 1 1/2	82
32	SB330P		3121154	33.9	1445	100			85		100
	SB330PH	—	1475		130x140	100	SAE 2" - 6000 psi	110			


¹⁾ Standard connection code = AI, others on request

²⁾ Special/welded version, on request

³⁾ Material code (MC) = 212, see model code, section 4.2.

Spare parts

SB...P

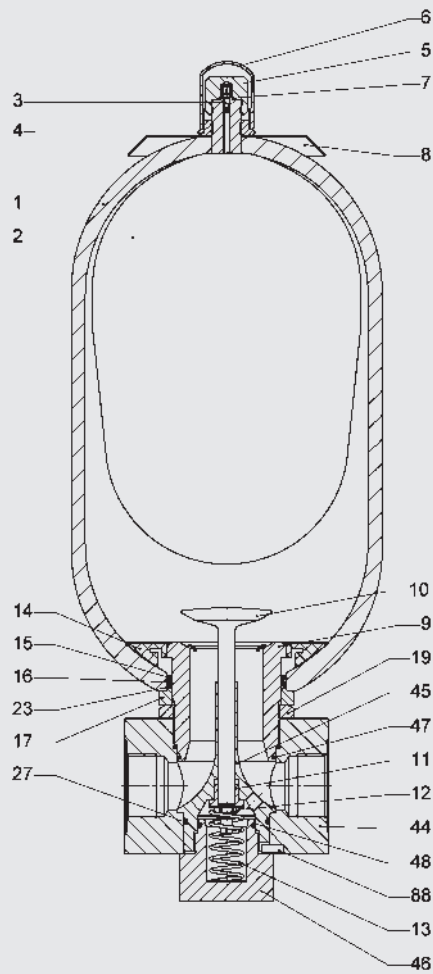

Description	Item
Bladder assembly	
consisting of:	
Bladder	2
Gas valve insert*	3
Lock nut	4
Seal cap	5
Protective cap	6
O-ring	7
Seal kit	
consisting of:	
O-ring	7
Washer	15
O-ring	16
Support ring	23
O-ring	27
O-ring	47
O-ring	48

* Available separately
Accumulator shell (item 1) and company label (item 8) not available as a spare part

Description	Item
Connection assembly	
consisting of:	
Oil valve body	9
Valve plate	10
Damping bush	11
Lock nut	12
Valve spring	13
Anti-extrusion ring*	14
Washer	15
O-ring	16
Spacer	17
Groove nut	19
Support ring (only for 330 bar)	23
O-ring	27
Connector	44
Guide piece	45
Cap	46
O-ring	47
O-ring	48
Locking key	88


* Available separately

NBR, carbon steel Standard gas valve


Volume [l]	Bladder assembly	Seal kit	
		SB330P/SB400P	SB550P
1	237624		
2.5	236171		
4	236046	357055	2106402
5	240917		
6	2112097		
10	236088	357058	357061
13	376249		
20	236089		
24	376253		
32	235335		

4.3.2 Pulsation dampers diaphragm accumulator

SBO...P...E (welded)

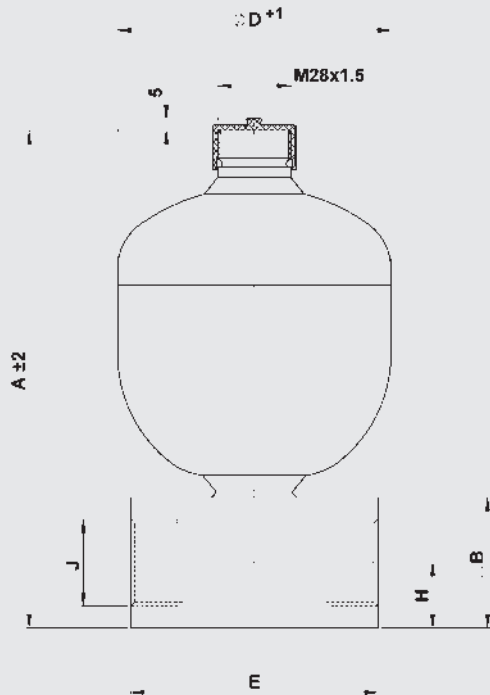

SBO...P...A6 (screwed)

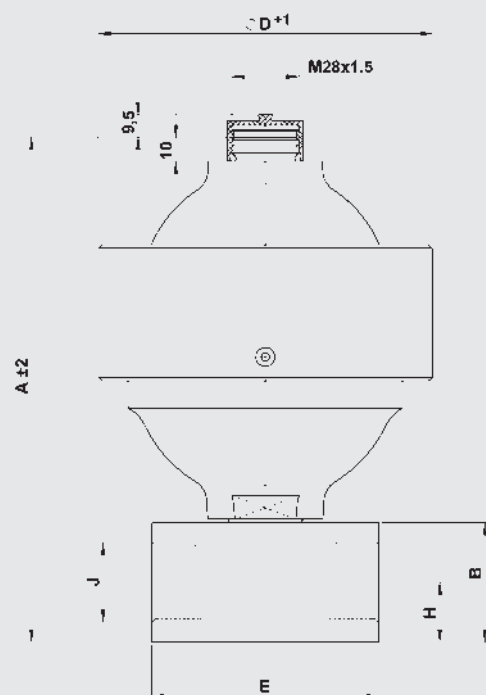

Dimensions SBO


Nominal volume [l]	Series and connection type ¹⁾	Max. operating pressure (PED)		A [mm]	□ B [mm]	Ø D [mm]	E [mm]	H [mm]	J thread ISO 228	Weight [kg]	
		Carbon steel [bar]	Stainless steel [bar]								
0.075	SBO250P-...E1...AK	250	–	131	–	64	Hex. 41	13	G 1/4	0.9	
0.16	SBO210P-...E1...AK	–	180	143	–	74				1	
0.32	SBO210P-...E1...AI	210	160	175	50	93	80	25	G 1/2	2.6	
0.5			–	192		105				3	
0.6	SBO330P-...E1...AI	330	–	222	60	115	105	30	G 1	5.6	
0.75	SBO210P-...E1...AI	210	140	217		121				5.1	
1	SBO200P-...E1...AI	200	–	231		136				6	
1.4	SBO140P-...E1...AI	140	–	244		145				6.2	
	SBO210P-...E1...AI	210	–	250		150				7.7	
2	SBO250P-...E1...AI	250	–	255	153	8.2					
	SBO100P-...E1...AI	100	100	261	160	6.3					
2	SBO210P-...E1...AI	210	–	267	167	8.9					
	SBO250P-...E1...AI	250	–	377	170	13.5					
3.5	SBO250P-...E1...AI	250	–	377	170	13.5					
4	SBO50P-...E1...AI	–	50	368	158	7.9					
	SBO250P-...E1...AI	–	180	377	170	13.5					
0.25	SBO500P-...A6...AI	500	350	162	50	115 (125)	80	25	G 1/2	5.2 (6.3)	
0.6	SBO450P-...A6...AI	450	250	202	60	140 (142)	95	105	30	G 1	8.9 (9.1)
1.3	SBO400P-...A6...AI	400	–	267		199	13.8				
2	SBO250P-...A6...AI	250	180	285		201	15.6				
2.8	SBO400P-...A6...AI	400	–	308		252	24.6				
4			–	325		287	36.6				

¹⁾ Standard connection code = AK or AI, others on request

() Brackets indicate different dimensions for stainless steel version


Spare parts

SBO...P...E

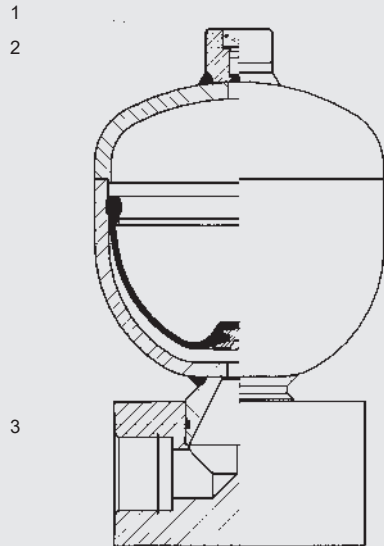

Description	Item
Charging screw	1
Seal ring	2
Seal ring	3


SBO...P...A6

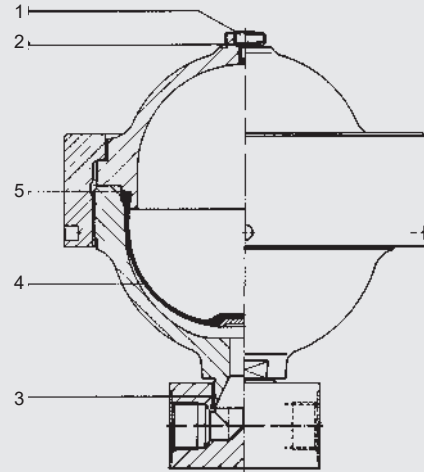

Description	Item
Charging screw	1
Seal ring	2
Seal ring	3
Diaphragm	4
Support ring	5

4.3.3 Pulsation damper for aggressive media

SBO...P-...A6/347...(PTFE)

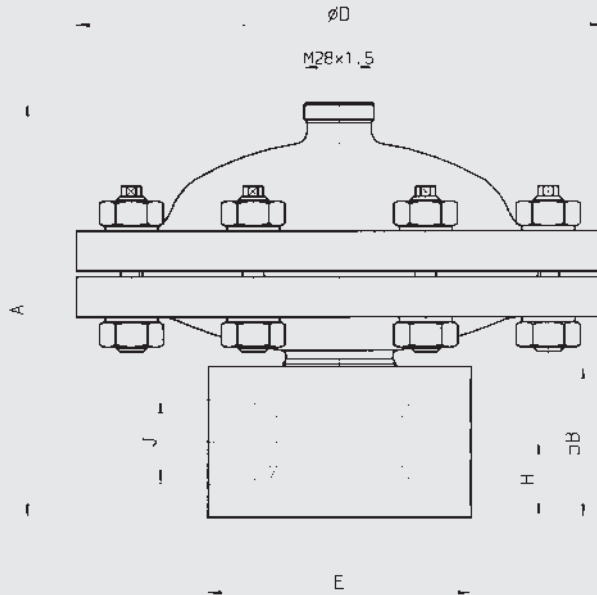

Pulsation damper in stainless steel with PTFE-coated diaphragm.
Also available without connection block.

Permitted operating temperature:
-15 °C ... +80 °C

Permitted pressure ratio $p_2 : p_0 = 2 : 1$


Dimensions

Nominal volume	Max. operating pressure (PED)	Part no.	A	□ B	Ø D	E	H	J ¹⁾ Thread	Weight
[l]	[bar]		[mm]	[mm]	[mm]	[mm]	[mm]	ISO 228	[kg]
0.2	40	4328332	140	60	210	105	30	G 1	11
	250	4328333	197		230				27
0.5	40	3091224	165		210				12
	250	3091221	200		230				26

¹⁾ Standard connection code = A1, others on request

Spare parts

SBO...P-...A6/347...(PTFE)

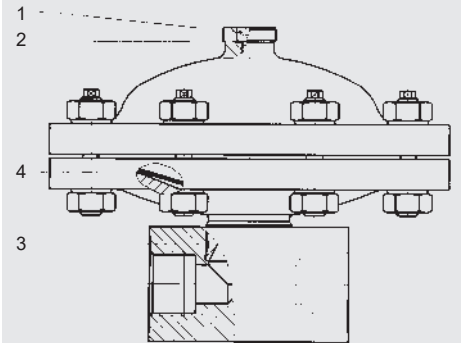

Description	Item
Charging screw	1
Seal ring	2
Seal ring	3
Diaphragm	4

SBO...(P)-...A4/777... (PVDF/PTFE)

Figure 1





Figure 2

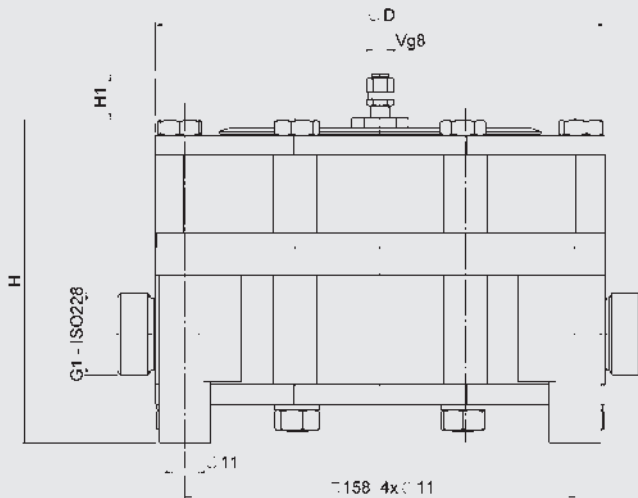

Pulsation damper in PVDF with PTFE-coated diaphragm.

Permitted operating temperature:
-10 °C ... +65 °C


Permitted pressure ratio $p_2 : p_0 = 2 : 1$

Dimensions

Nominal volume [l]	Max. operating pressure (PED) [bar]	Part no.	Ø D [mm]	H [mm]	H1 [mm]	Weight [kg]	Figure
0.08	12	3655864	115	94	15	1.5	1
0.2	10	—	182	128	20	5.7	2
	16	—		130	18	6.4	
	25	3357658		168	20	6	
0.5	10	—		170	19	6.8	
	16	—					
	25	3357657					

Spare parts

SBO...(P)-...A4/777... (PVDF/PTFE)

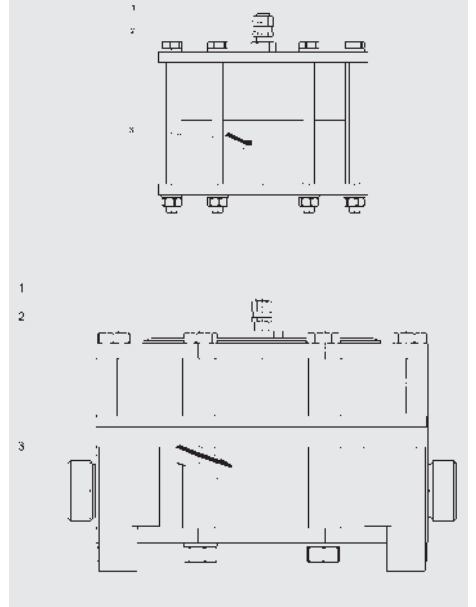


Description	Item
Gas valve assembly	1
Gas valve insert brass / stainless steel	2
Diaphragm	3

Relevant operating instructions are available on request.

4.3.4 Suction flow stabiliser

SB16S

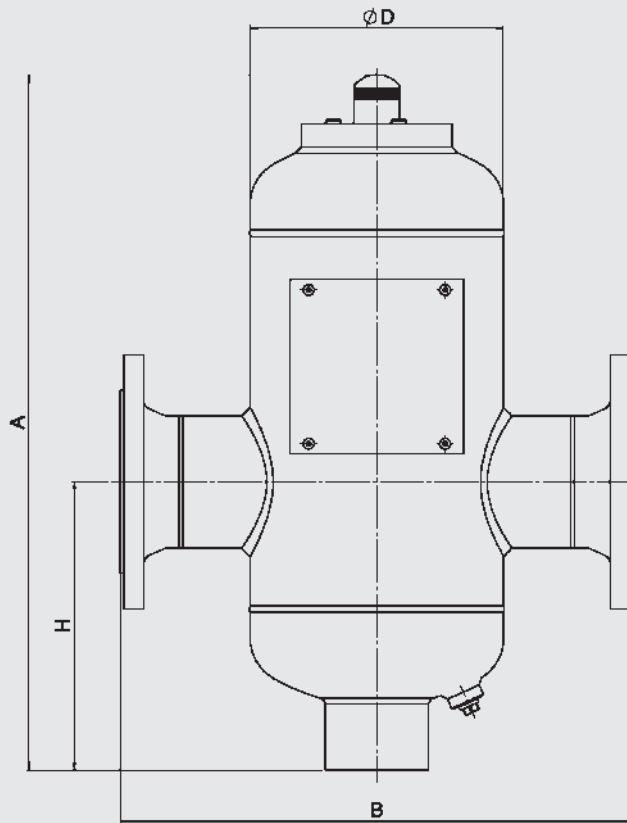

Dimensions

SB16S

Perm. operating pressure 16 bar (PED)


Nominal volume	Fluid volume	Eff. gas volume	A	B	Ø D	H	DN*	Weight
[l]	[l]	[l]	[mm]	[mm]	[mm]	[mm]		[kg]
12	12	1	580	425	219	220	65	40
25	25	2.5	1025	425	219	220	65	60
40	40	4	890	540	300	250	80	85
100	100	10	1150	650	406	350	100	140
400	400	35	2050	870	559	400	125	380

Further pressure ratings 25 bar, 40 bar; others on request.

Other fluid volumes on request

* To EN1092-1/11 /B1/PN16

Spare parts

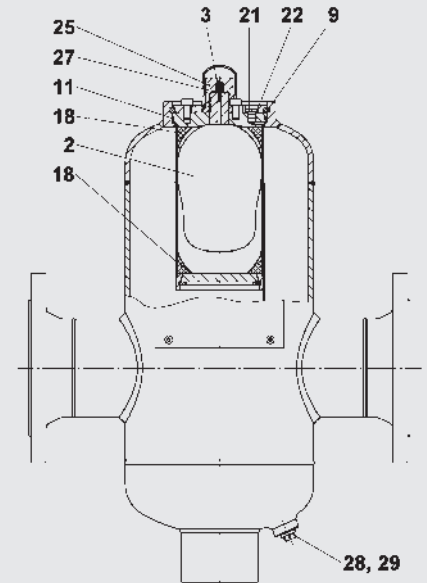


Description	Item
Accumulator bladder	2
Gas valve insert	3
Anti-extrusion ring	9
O-ring	11
Insertion ring, 2x	18
Locking screw	21
Seal ring	22
Seal cap	25
O-ring	27
Seal ring	28
Locking screw	29

5. SILENCER

5.1. APPLICATION

Silencer for fluid noise damping
Type SD...

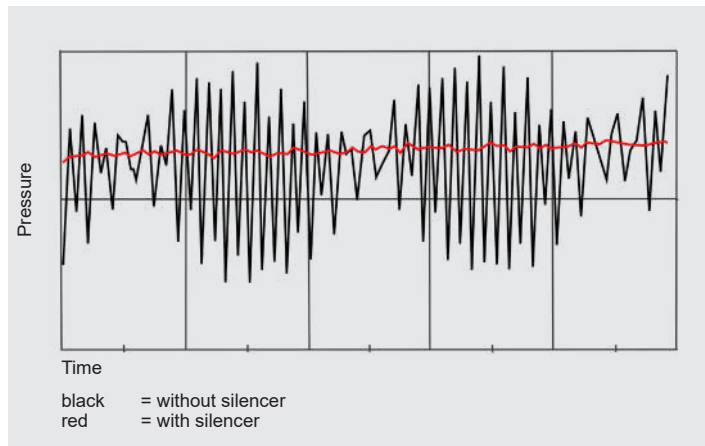

5.1.1 General

All displacement pumps, such as axial and radial piston pumps, vane, gear or screw pumps produce volume and pressure fluctuations which are exhibited as vibrations and noises. Noises are not only generated and transmitted by the pump. They are also the result of mechanical vibrations and vibrations caused by the fluid pulsations, which are amplified when transmitted to larger surfaces. Insulation, the use of flexible hoses and silencer covers can only provide partial solutions to the problem as they do not prevent transmission to other areas.

5.1.2 Applications

Vehicles, machine tools, plastics machinery, aeroplanes, ships, hydraulic power stations and other systems with a large "surface" are all applications where the noise level can be reduced.

5.1.3 Mode of operation

The HYDAC fluid SILENCER is based on the principle of an expansion chamber with interference line.

By reflecting the oscillations within the silencer the majority of the oscillations are damped across a wide frequency spectrum.

5.1.4 Design

The SILENCER consists of a housing, an internal tube and two pipe connections on opposite sides. It has no moving parts and no gas charge and is therefore absolutely maintenance free.

The SILENCER can be used for mineral oils, phosphate ester and water glycol. A stainless steel model is available for other fluids.

5.1.5 Installation

It is recommended that one connection side is joined via a flexible hose in order to reduce the transmission of mechanical vibrations. The damper can be installed in any position.

5.1.6 Permitted operating temperatures

-20 °C ... +80 °C

5.1.7 Notice

All work on HYDAC silencers must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.701.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology
No. 3.000


Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator
Division

5.2. SIZING

Universal broadband silencer

Series SD330, SD280K

With the aid of a few details (max. pressure and nominal flow), the appropriate silencer type for the particular application can easily be chosen by using the following pressure/flow rate matrix.

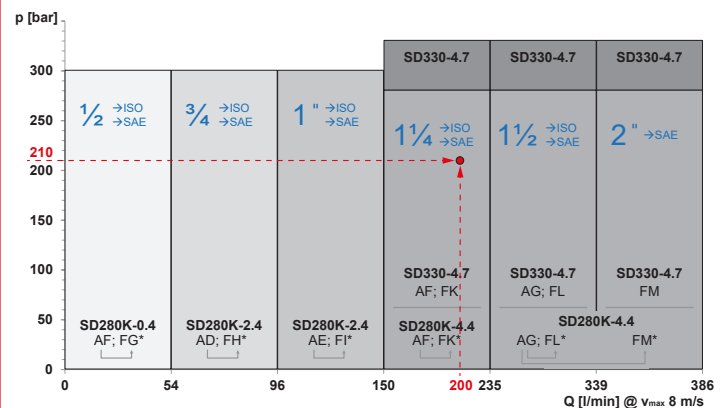

* SD280K model: ISO connection can be converted to an SAE flange connection (see section 5.4.2)

Example of the selection process:

Max. operating pressure $p = 210$ bar

Flow rate $Q = 200$ l/min

The following versions can be selected, depending on the connection system available:

- SD330-4.7...AF/AF
- SD330-4.7...FK/FK
- SD280K-4.4...AF/AF
→ with SAE adapter (section 5.4.2), can be converted to FK/FK

Customer-specific versions

For special applications, the HYDAC SILENCER can be dimensioned to suit the application.

This can be done on the basis of a piston accumulator or a diaphragm accumulator.

The starting point for the selection table is to determine the level of transmission damping D from 20 dB upwards.

$$D = 20 \cdot \log \frac{\Delta p_o}{\Delta p_m}$$

Δp_o = amplitude of pressure fluctuations without silencer

Δp_m = amplitude of pressure fluctuations with silencer

When selecting the damper the following has to be taken into account:

- 1) the size of the silencer body
- 2) the fundamental frequency f of the pump
 - $f = i \cdot n / 60$ in Hz
 - i = number of displacement elements
 - n = rotational speed in rpm

By calculating the fundamental frequency and using the system data (e.g. pipe length, ball valves, pressure, temperature, etc.) we can determine the correct size of silencer for you.

Use the specification sheet to provide the required data quickly and conveniently on a PC and send it to us.

See www.hydac.com or catalogue section:

- HYDAC Accumulator Technology
No. 3.000

5.3. MODEL CODE

Not all combinations are possible.
Order example. For further information, please contact HYDAC.

SD330 - 4.7 / 412 U - 330 FK1/FK2

Series

Type code*
No details = forged housing
K = piston accumulator base shell
M = diaphragm accumulator base shell

Nominal volume [l]

Silencer type*
0 = without pipe
4 = universal broadband silencer

Housing material*
1 = carbon steel
3 = stainless steel

Sealing material
0 = no seal
2 = NBR (-20 °C ... +80 °C)

Certification code*
U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Connections
See section 5.4.
e.g. FK1 – version 1 with SAE J 518 1 1/4
FK2 – version 2 with SAE J 518 1 1/4

* Others on request

5.4. DIMENSIONS, STANDARD TYPES

The following connections are available as standard:


Series	ISO 228 compliant threaded connection						SAE J 518 compliant flange connection					
	G						SAE					
	3/8	1/2	3/4	1	1 1/4	1 1/2	1/2	3/4	1	1 1/4	1 1/2	2
	AB	AC	AD	AE	AF	AG	FG	FH	FI	FK	FL	FM
SD330					●	●				●	●	●
SD280K*		●	●	●	●	●	●	●	●	●	●	●

* Can be converted to an SAE flange connection, relevant information is highlighted in grey (see section 5.4.2)

With any connection type, care must be taken to ensure that the silencer has enough mechanical support.
Mounting elements can be found in the following catalogue section:

- Mounting elements for hydraulic accumulators
No. 3.502


ISO 228 compliant threaded connection A

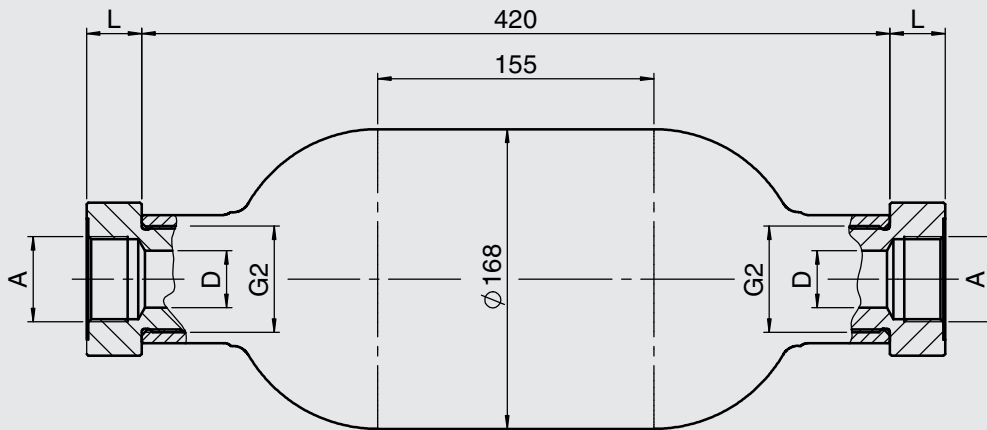

Series	Vol. [l]	Perm. operating pressure [bar]	A ISO 228		L [mm]	D* [mm]	Weight [kg]	Part no.
SD330	4.7	330	AF/AF	G 1 1/4	31	25	14.8	4390237
			AG/AG	G 1 1/2	31	32	15.8	4388045

* Smallest internal diameter


SAE J 518 compliant flange connection F

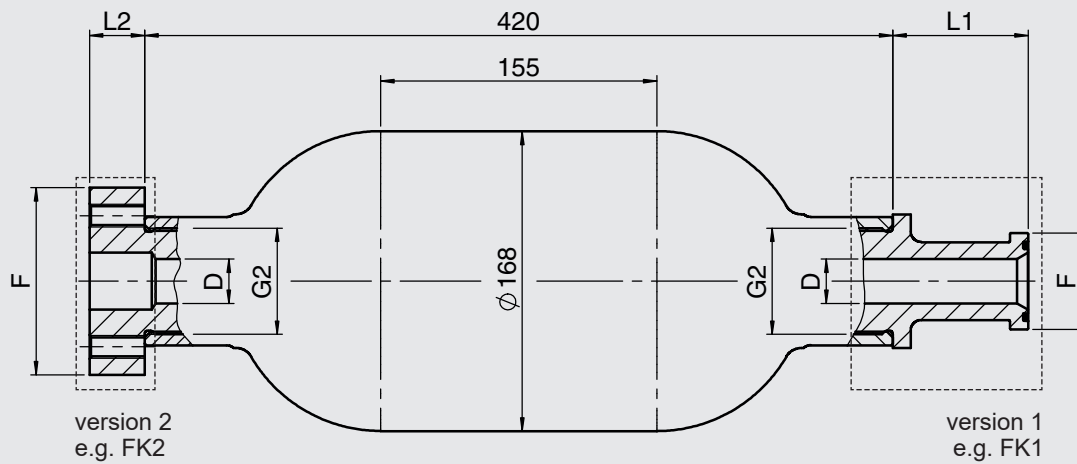

Series	Vol. [l]	Perm. operating pressure [bar]	F SAE J 518		L2 for FK2 [mm]	L1 for FK1 [mm]	D* [mm]	Weight [kg]	Part no.
SD330	4.7	330	FK2/FK2	SAE 1 1/4	31	–	25	16.9	4413180
			FK1/FK2	SAE 1 1/4	31	76	25	15.9	4402764
			FL2/FL2	SAE 1 1/2	36	–	30	18.2	4390978
			FL1/FL2	SAE 1 1/2	36	76	30	16.8	4413183
			FM2/FM2	SAE 2	41	–	32	22	4413377
			FM1/FM2	SAE 2	41	93	32	19.2	4413381

* Smallest internal diameter

5.4.2 SD280K

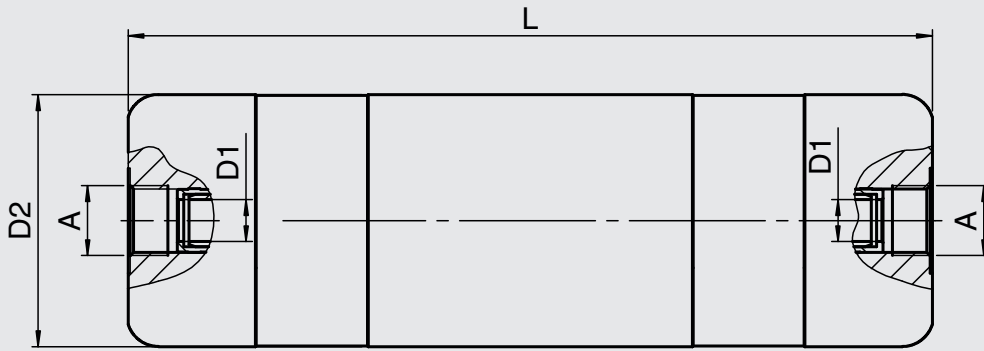


Series	Vol. [l]	Perm. operating pressure [bar]	A ISO 228		D2* [mm]	D2 [mm]	L [mm]	Weight [kg]	Part no.
SD280K	0.4	300	AC/AC	G 1/2	12	60	250	2.4	4402343
	2.4	300	AD/AD	G 3/4	16	120	383	14.5	4392308
			AE/AE	G 1	20				4392310
	4.4	280	AF/AF	G 1 1/4	25	150	445	26	4392311
			AG/AG	G 1 1/2	32				4392312

* Smallest internal diameter

SAE adapter for SD280K

There is an option to convert the ISO 228 threaded connection on the SD280K model to an SAE J 518 flange connection. This applies to **3000 PSI** as well as **6000 PSI**.

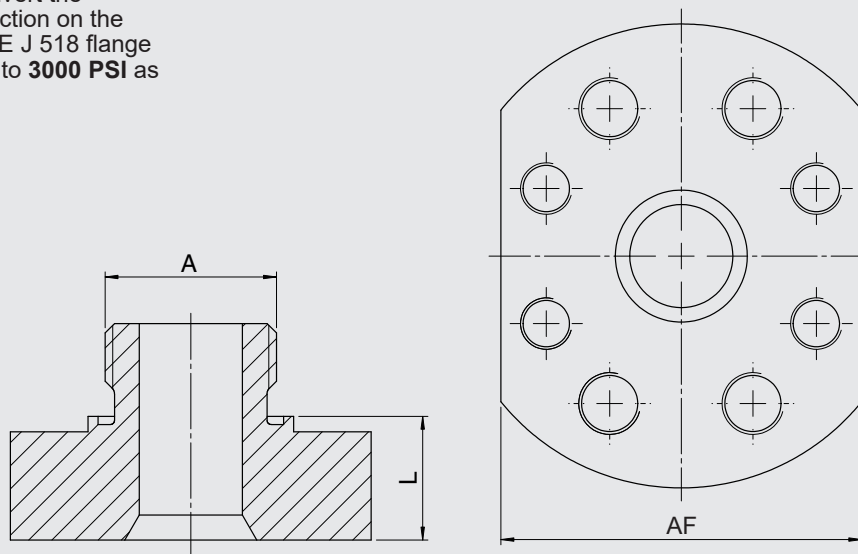

Series	Vol. [l]	SD280K Part no.	Connection recoding	SAE adapter					
				Accumulator connection A ISO 228	Adapter connection SAE J 518	L [mm]	Weight [kg]	Part no.	AF
SD280K	0.4	4402343	AC → FG	G 1/2	SAE 1/2	18	0.3	4437591	55
	2.4	4392308	AD → FH	G 3/4	SAE 3/4	21	0.53	4416007	65
		4392310	AE → FI	G 1	SAE 1	24	0.85	4416008	70
	4.4	4392311	AF → FK	G 1 1/4	SAE 1 1/4	28	1.41	4416009	85
		4392312	AG → FL	G 1 1/2	SAE 1 1/2	28	1.86	4416010	100
			AG → FM	G 1 1/2	SAE 2	38	3.42	4416011	110

5.5. SPARE PARTS AND ACCESSORIES

5.5.1 Spare parts

NBR, others on request

Designation	Part no.
Seal kit SD280K NBR	4416121

5.5.2 Mounting elements

The following table lists the recommended mounting clamps. The choice of clamp depends on the external diameter of the silencer (for more information on mounting elements see section 5.4.).

Designation	Part no.	Series			
		SD330	SD280K		
		4.7	0.4	2.4	4.4
HyRac 167-175/178 H5 ST	445043	●			
HRGKSM 0 R 58-61/62 ST	3018442		●		
HRGKSM 1 R 119-127/124 ST	444505			●	
HRGKSM 1 R 146-154/151 ST	444321				●

6. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: 0049 (0) 68 97 / 509 - 01

Fax: 0049 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com

Accumulator stations



1. GENERAL

HYDAC supplies fully assembled piston accumulator stations which are ready for operation, complete with all the necessary valve controls, pipe fittings and safety devices

- As an individual accumulator unit or
- In a back-up version with nitrogen bottles to increase the effective volume

The HYDAC system approach creates a HYDAC system of, for example, bladder or piston accumulator stations, by integrating individual HYDAC components.

An accumulator station can be composed of:

- Piston accumulators with nitrogen bottles
- Bladder accumulators with nitrogen bottles or
- Nitrogen bottles alone

The modular design of the accumulator stations enables HYDAC to incorporate all customer requirements. Taking the customer's own operating data into account, HYDAC can calculate the required accumulator volumes using the accumulator simulation program:

- **ASP** – Accumulator Simulation Program.

Please read the relevant operating instructions for the individual HYDAC components!

2. MODEL CODE

(also order example)

SS350 K - 4 x 250 / 12 x 320 (U)

Series

SS = accumulator station
e.g. SS350 = accumulator station with a p_{max} of 350 bar

Type code letter

K = piston accumulator
B = bladder accumulator
N = nitrogen bottles

Number of hydraulic accumulators

Nominal volume [l] of the hydraulic accumulators

Number of nitrogen bottles

Nominal volume [l] of nitrogen bottles

Certification code

(U) = European Pressure Equipment Directive (PED)



3. EXAMPLES OF ACCUMULATOR STATIONS

3.1. BLADDER ACCUMULATOR STATIONS

EXAMPLE: SS330B-16x32(U)

Technical data:

16 bladder accumulators, each with a volume of 32 l
max. operating pressure: 330 bar

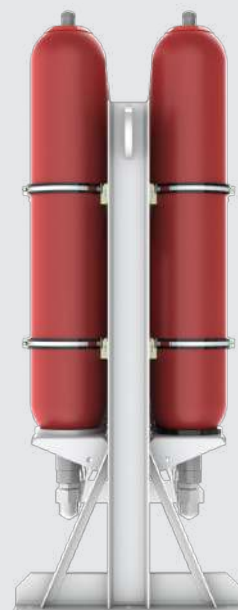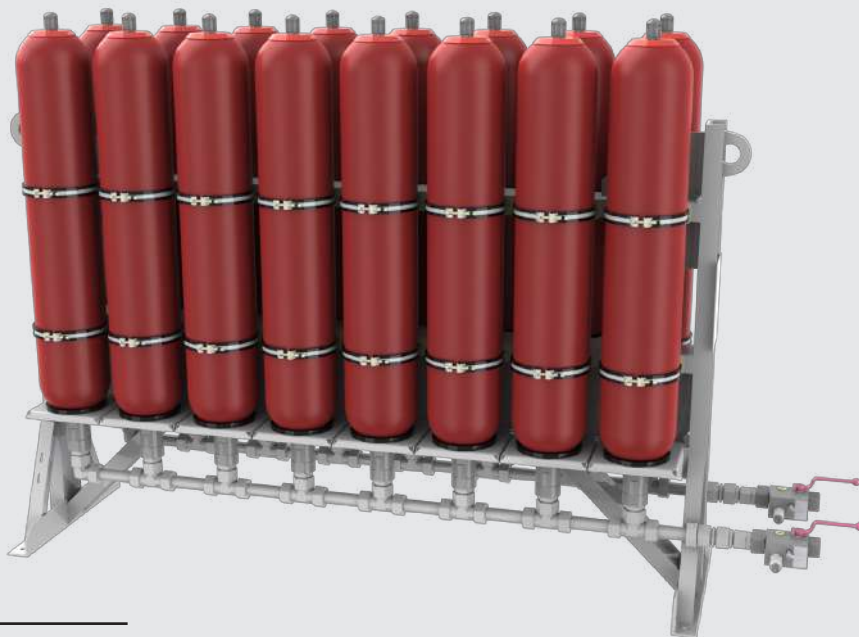

Dimensions

Length [mm]	Width [mm]	Height [mm]
2780	660	1950

EXAMPLE: SS330B-5x50(U)

Technical data:

5 bladder accumulators, each with a volume of 50 l
max. operating pressure: 330 bar



DIMENSIONS

Length [mm]	Width [mm]	Height [mm]
1640	600	2750

3.2. PISTON ACCUMULATOR STATIONS

EXAMPLE: SS350K-1x110/8x50(U)

Technical data:

1 piston accumulator, volume 110 l

8 N₂ bottles, each with a volume of 50 l

max. operating pressure: 350 bar



Dimensions

Length [mm]	Width [mm]	Height [mm]
1540	900	3300

EXAMPLE: SS220K-1x120/1x75(U)

Technical data:

1 piston accumulator, volume 120 l

1 N₂ bottle, volume 75 l

max. operating pressure: 220 bar



Dimensions

Length [mm]	Width [mm]	Height [mm]
520	800	3500

EXAMPLE: SS210K-1x110/2x50(U)

Technical data:

1 piston accumulator, volume 110 l

2 N₂ bottles, each with a volume of 50 l

max. operating pressure: 210 bar



Dimensions

Length [mm]	Width [mm]	Height [mm]
950	475	2840

EXAMPLE: SS350K-1x200/2x110(A9)

Technical data:

1 piston accumulator, volume 200 l

2 N₂ bottles, each with a volume of 110 l

max. operating pressure: 350 bar



Dimensions

Length [mm]	Width [mm]	Height [mm]
1250	550	2900

3.3. NITROGEN BOTTLES

Nitrogen bottles in a modular design:
up to 24 bottles can be assembled on a frame in this version.
For a larger quantity, a special design can be supplied.

See catalogue section:

- Hydraulic accumulators with back-up nitrogen bottles
No. 3.553

EXAMPLE: SS350N-16x75(U)

Technical data:
16 N₂ bottles, each with a volume of 75 l
max. operating pressure: 350 bar



Dimensions		
Length [mm]	Width [mm]	Height [mm]
2440	900	3000

4. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com



Hydraulic accumulators with back-up nitrogen bottles

1. GENERAL

To complete the accumulator range, HYDAC provides a variety of useful accessory products. They guarantee correct installation and optimum functioning of HYDAC hydraulic accumulators. They include nitrogen bottles which can be used to back up bladder and piston accumulators. Nitrogen bottles used as back-ups increase the gas volume in the accumulator system. This means that smaller accumulators can be used for the same gas volume and costs can be reduced.

For further information, please turn to the sections:

- Bladder accumulators
Standard design
No. 3.201
- Piston accumulators
Standard design
No. 3.301

1.1. NOTICE

All work with HYDAC hydraulic accumulators / nitrogen bottles must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

- Operating instructions for bladder accumulators SB
No. 3.201.BA
- Operating instructions for piston accumulators SK
No. 3.301.BA
- Operating instructions for gas pressure vessels GDB
No. 3.553.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology
No. 3.000


Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

2. BACK-UP VERSIONS


2.1. SET-UP USING THE EXAMPLE OF A BLADDER ACCUMULATOR

Based on bladder accumulator models 20 ... 50 l, the gas side of these accumulators is specially designed to connect to nitrogen bottles. A diffuser rod prevents damage to the bladder when the accumulator is charged. This design can also be used for the separation of fluids (taking into account the volume ratios which apply to bladder accumulators).

Type 1

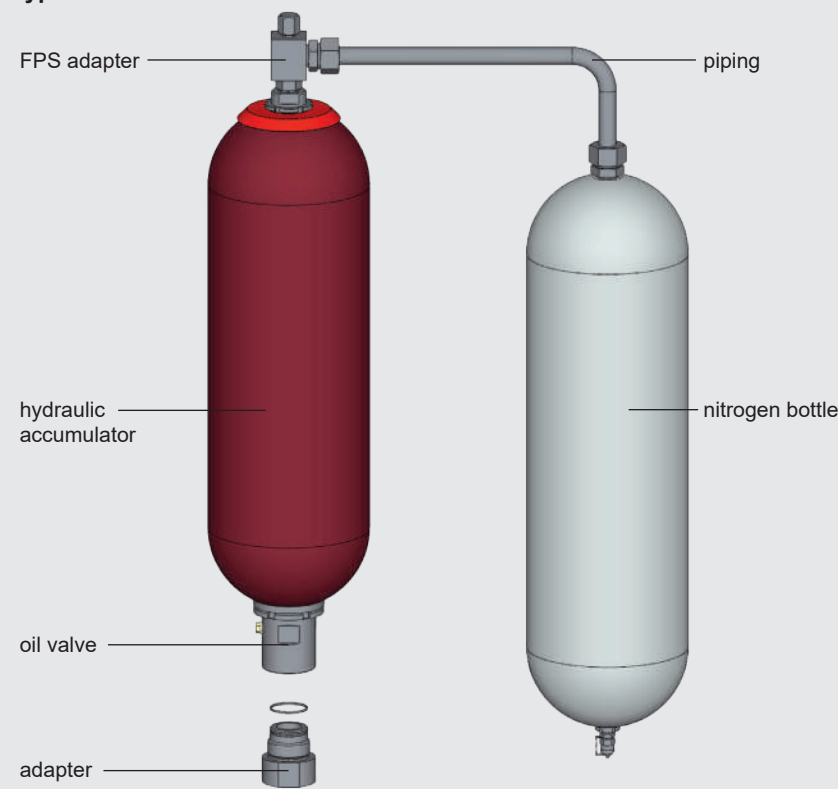


Type 2

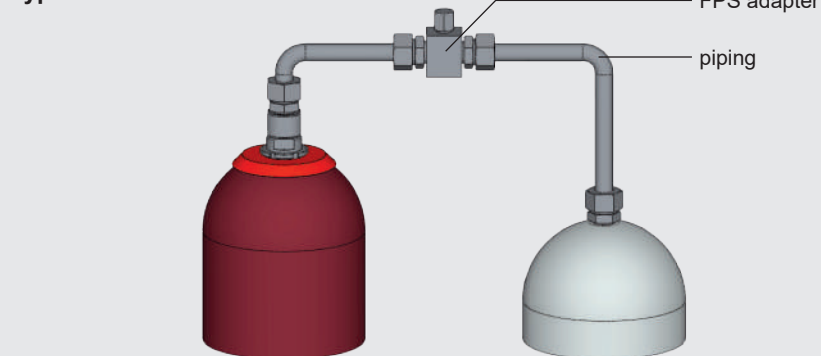


2.2. DIMENSIONS

Type 1

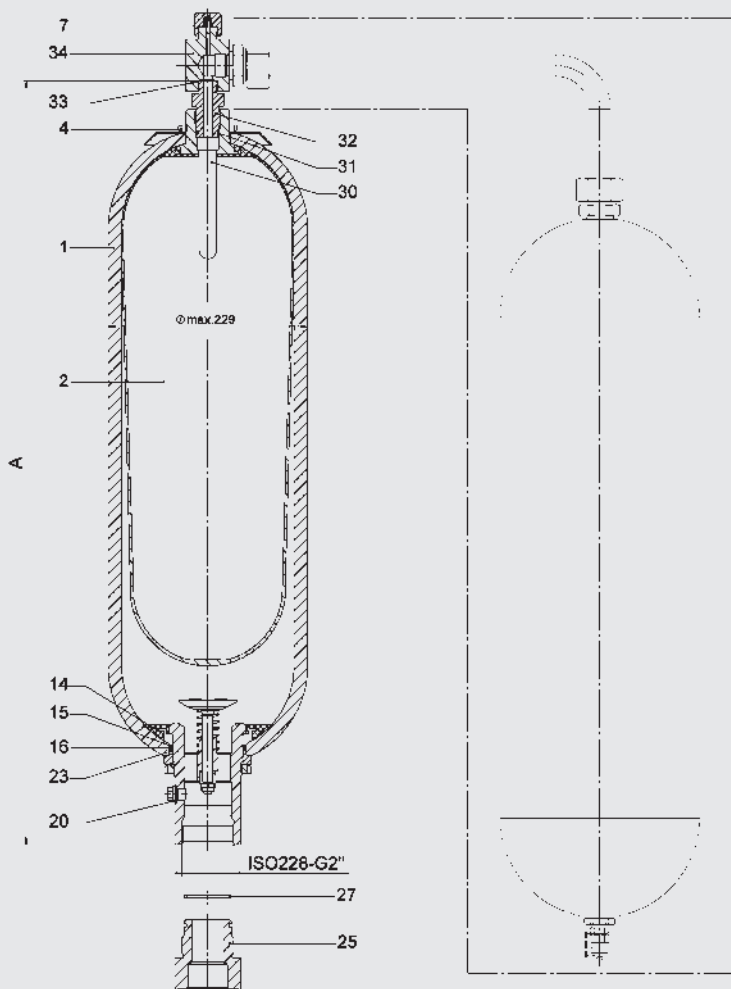

Type 2

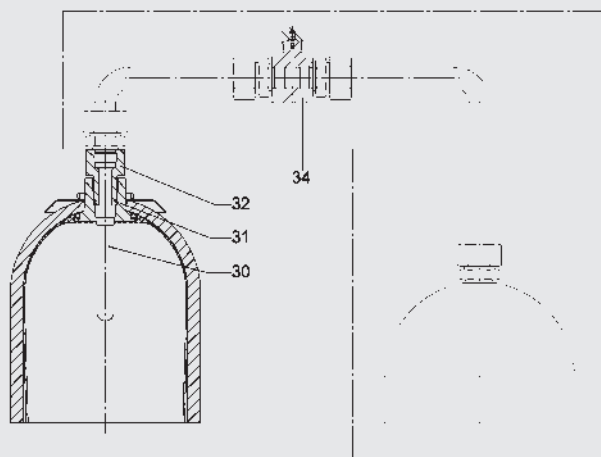

Nominal volume [l]	Effect. gas volume [l]	Weight [kg]	A max. [mm]	Part no.	
				Type 1	Type 2
20	17.5	53.5	905	3153006	3239334
24	24	72	1070	3280349	4481316
32	32.5	89	1420	3114824	3085838
50	47.5	119.5	1930	3079661	3082402

Others on request

2.3. SPARE PARTS

NBR, carbon steel, standard gas valve

Nominal volume of accum. [l]	Seal kit Part no.	Repair kit	
		Type 1 Part no.	Type 2 Part no.
20	353621	3119500	3897464
24		3119502	3897463
32		3119498	3897462
50		3119499	3897461

Description	Item
-------------	------

Bladder assembly
consisting of:

Bladder	2
Lock nut	4
Diffuser rod	30
O-ring 22x2.5 ¹⁾	31
Adapter for type 1/2	32

Seal kit
consisting of:

O-ring 7.5x2 ¹⁾	7
Washer	15
O-ring 80x5 ¹⁾	16
Seal ring	20
Support ring	23
O-ring 48x3 ¹⁾	27

Repair kit
consisting of:

Bladder assembly (see above)	
Seal kit (see above)	
O-ring 11x2 ¹⁾	33

Anti-extrusion ring 14

FPS adapter for type 1/2²⁾ 34

Recommended spare parts

¹⁾ Different dimensions for code 663 and 665

²⁾ FPS adapter (item 34) available as an accessory, see section 4.2.

Accumulator shell (item 1) not available as a spare part

Adapter (item 25) incl. O-ring (item 27) available as an accessory, see catalogue section:


Bladder accumulators, Standard design No. 3.201, section 4.

Adapter (item 32) for type 1 standard

For other spare parts, see section 3.

3. NITROGEN BOTTLES

3.1. DESCRIPTION AND DESIGN

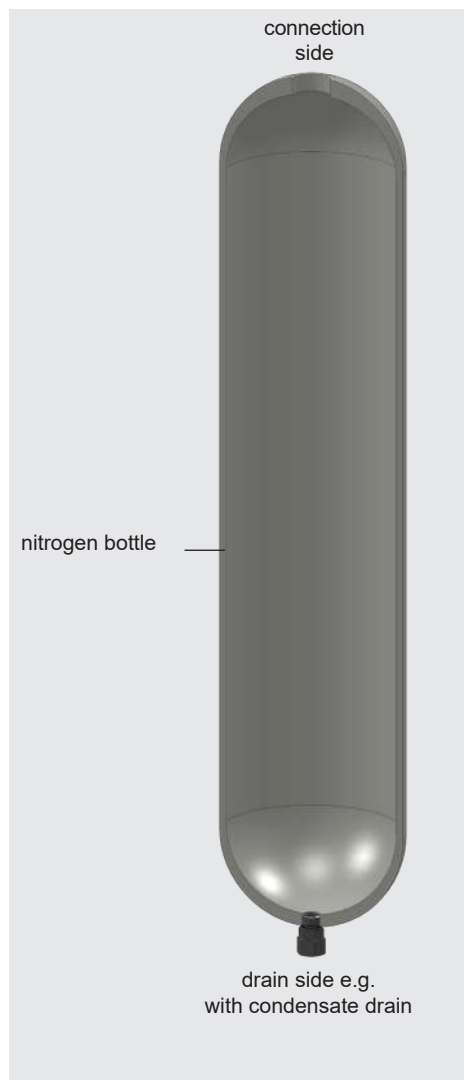

HYDAC nitrogen bottles are used for receiving and storing nitrogen.

HYDAC supplies various versions, such as standard nitrogen bottles made from forged vessels and special vessels based on bladder accumulator shells (SN...B), piston accumulator tubes (SN...K) and diaphragm accumulator halves (SN...M) – see catalogue sections:

- Bladder accumulators
Standard design
No. 3.201
- Piston accumulators
Standard design
No. 3.301
- Diaphragm accumulators
No. 3.100

The following technical specifications refer to standard nitrogen bottles. Please ask us for information regarding other designs.

3.2. ADVANTAGES

Using HYDAC nitrogen bottles provides the following advantages:

- Cost-effective increase in the accumulator volume and
- smaller accumulators for the same gas volume as a result.

3.3. SPECIFICATIONS

3.3.1 Model code

Not all combinations are possible.
Order example. For further information, please contact HYDAC.

SN360 - 50 AA / 010 U - 360 D G - C

Series

Code

No details = standard
Special types (see section 3.1.)

Nominal volume [l]

Connection type

Type on drain side (condensate)

A = ISO 228 (BSP)
B = DIN 13 to ISO 965/1 (metric)
C = ANSI B1.1 (UNF seal SAE)
D = ANSI B2.1
F = flange

Type on connection side

A = ISO 228 (BSP)
B = DIN 13 to ISO 965/1 (metric)
C = ANSI B1.1 (UNF seal SAE)
D = ANSI B2.1
F = flange

Material code (MC)

Material (connection)

0 = no installed parts
1 = carbon steel
3 = stainless steel ¹⁾
4 = carbon steel with protective coating
6 = low temperature steel

Housing material

1 = carbon steel
2 = carbon steel with protective coating
4 = stainless steel ¹⁾
6 = low temperature steel

Seal material (elastomer)

0 = no elastomer used
2 = NBR
4 = IIR
5 = low temperature NBR
6 = FKM

Certification code

U = European Pressure Equipment Directive (PED)

Permitted operating pressure [bar]

Size for drain side (see Table 3.3.3)

Size for connection side (see Table 3.3.3)


Version

No details = standard
C = compact


¹⁾ Dependent on type and pressure rating

3.3.2 Dimensions

Version: standard

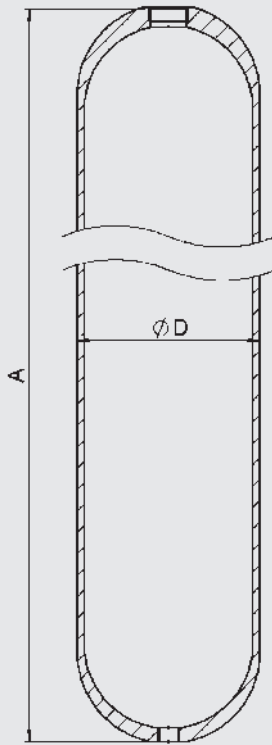

Version: compact

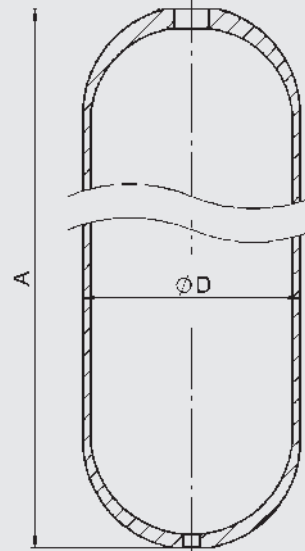

Series	Volume [l]	Version	Certification code	Connections to ISO 228 (Type AA)		A ±25 [mm]	D ±1 % [mm]	Weight approx. [kg]	Part no.	Designation
				Drain side	Connec- tion side					
SN360	50	Standard	U	G 3/4	G 3/4	1590	229	89	3176324	SN360-50AA/010U-360DD
				G 3/4	G 1 1/2				3418347	SN360-50AA/010U-360DG
			S	G 3/4	G 1 1/2				3987605	SN360-50AA/010S-210DG
	75	Standard	U	G 3/4	G 1 1/2	2280	229	126	3561595	SN360-75AA/010U-360DG
				S	G 3/4				G 1 1/2	3987606
		Compact	U	G 3/4	G 1 1/2	1690	273	124	3987162	SN360-75AA/010U-360DG-C
S	G 3/4			G 1 1/2	3987163				SN360-75AA/010S-200DG-C	
SN600	50	Standard	S	G 3/4	G 1 1/2	1730	241	143	3987613	SN600-50AA/010S-345DG
	75	Standard	S	G 3/4	G 1 1/2	2500	232	197	3987614	SN600-75AA/010S-345DG

3.3.3 Connections for SN360

The following connections are available for standard nitrogen bottles (see section 3.3.2).

Standard connections are highlighted in grey. All other versions available on request (not all combinations are possible).

Size	Type A BSP ISO228	B Metric DIN13 ISO965/1	C SAE ANSI B1.1	D NPT ANSI B2.1	F Flange connection
A	G 1/4"	M12x1.5	7/16"-20UNF	1/4"	1/2" 3000 psi, code 61
B	G 3/8"	M18x1.5	9/16"-18UNF	3/8"	3/4"
C	G 1/2"	M22x1.5	3/4"-16UNF	1/2"	1"
D	G 3/4"	M27x2	1 1/16"-12UN	3/4"	1 1/4"
E	G 1"	M33x2	1 5/16"-12UN	1"	1 1/2"
F	G 1 1/4"	M42x2	1 5/8"-12UN	1 1/4"	2"
G	G 1 1/2"	M48x2	1 7/8"-12UN	1 1/2"	1/2" 6000 psi, code 62
H	G 2"	M14x1.5	2 1/2"-12UN	2"	3/4"
I	G 1 3/4"	M8	-	-	-
K	-	M16x1.5	-	-	1 1/4"
L	-	-	7/8"-14UNF	5/8"	1 1/2"
M	-	-	-	-	2"
S	Special design				

4. ACCESSORIES


4.1. F + P CHARGING AND TESTING BLOCK

4.1.1 Description

The HYDAC F + P charging and testing block is used to charge and test back-up type hydraulic accumulators. It has connections for the FPU-1 charging and testing unit and for pressure gauges. As a safety function, a GSV6 gas safety valve can be fitted (see catalogue section given below). In addition, it allows the back-up nitrogen bottles to be shut off from the hydraulic accumulator.

- Safety equipment for hydraulic accumulators
No. 3.552

4.1.2 Hydraulic circuit with charging and testing block

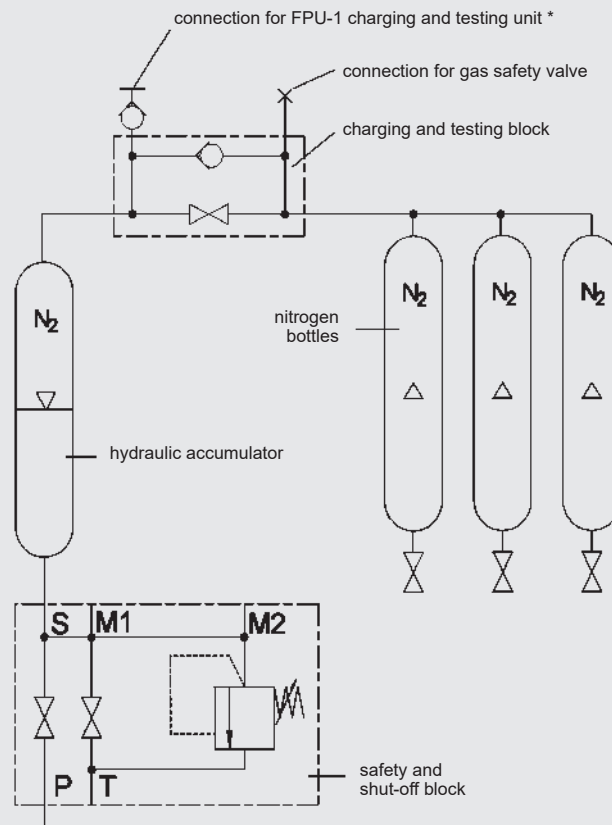

* For further information, see catalogue section:

- FPU charging and testing unit
No. 3.501

4.1.3 Preferred models / spare parts




Figure 1






Figure 2

Carbon steel, NBR



Designation	Max. operating pressure [bar]	Weight [kg]	Part no.	Seal kit ¹⁾	Fig.
F+P-16-20SR-6112-02X	400	4.3	850233	2115776	1
F+P-32-38SR-6112-02X	350	14	552193	2112088	1
F+P-32-38SR-6112-12X-A-GSV-MV	350	21.4	4241832	2112088	2

¹⁾ Recommended spare parts

4.1.4 **Technical data/dimensions**
 Charging and testing block DN 16

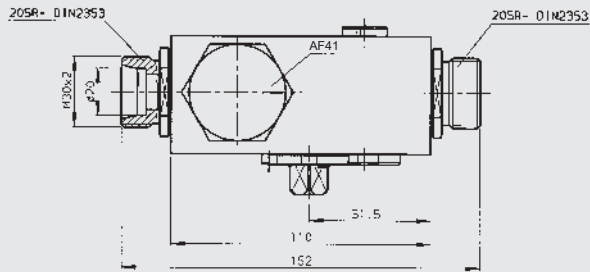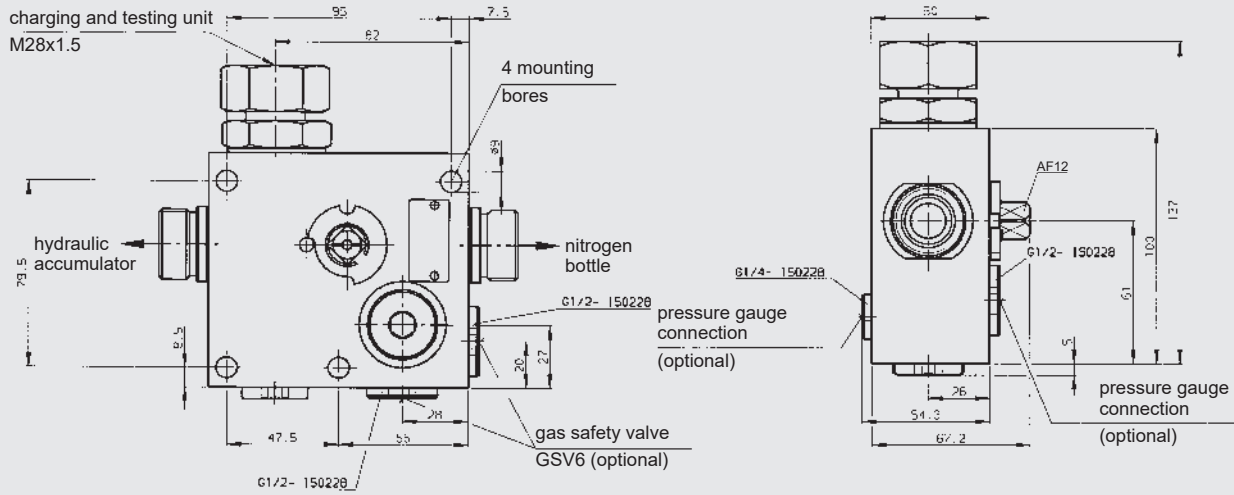


Charging and testing block DN 32

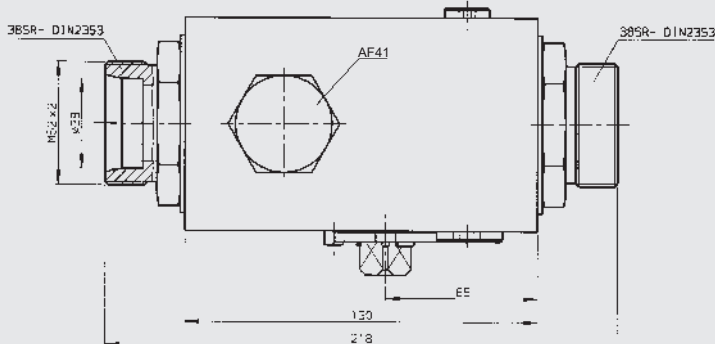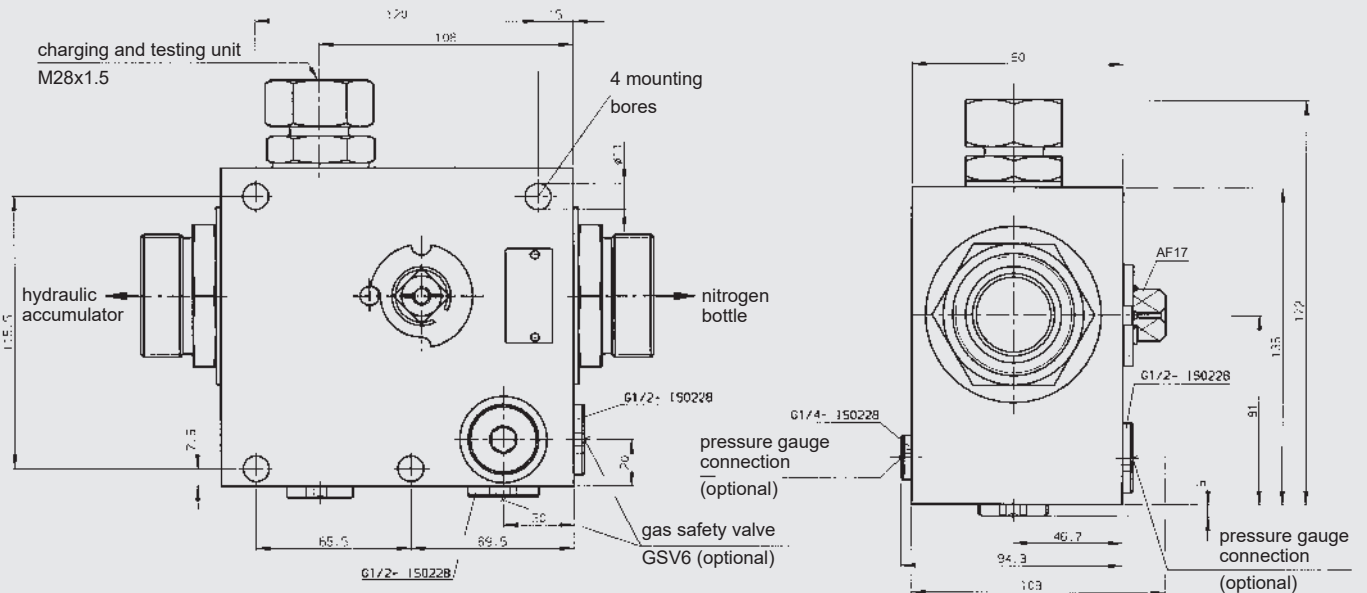

4.2. FPS ADAPTER

The HYDAC FPS adapter is used to charge back-up type hydraulic accumulator systems. For this purpose, it has a connection for the FPU-1 charging and testing unit.

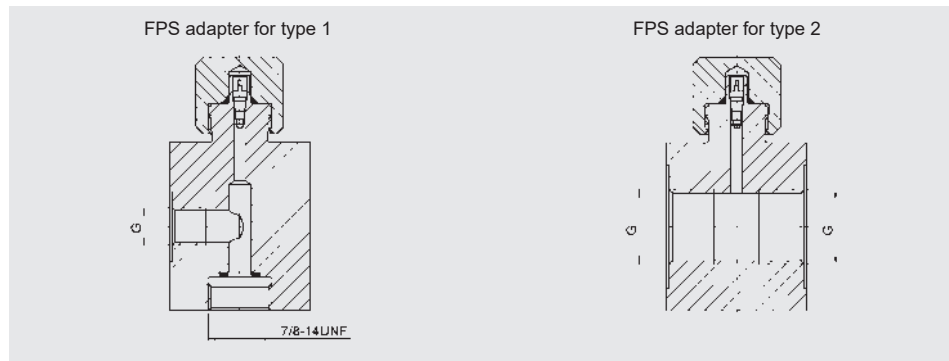


Designation	G ISO 228	Part no.	Type
Adapter FPS 7/8-14UNF	G 3/4	363226	1
Adapter FPS	G 3/4	243218	2

4.3. CONDENSATE DRAIN SET

The condensate drain set consists of a throttle valve and a suitable condensate draining hose.

It is used to drain any condensate from the nitrogen bottle, in a controlled way.

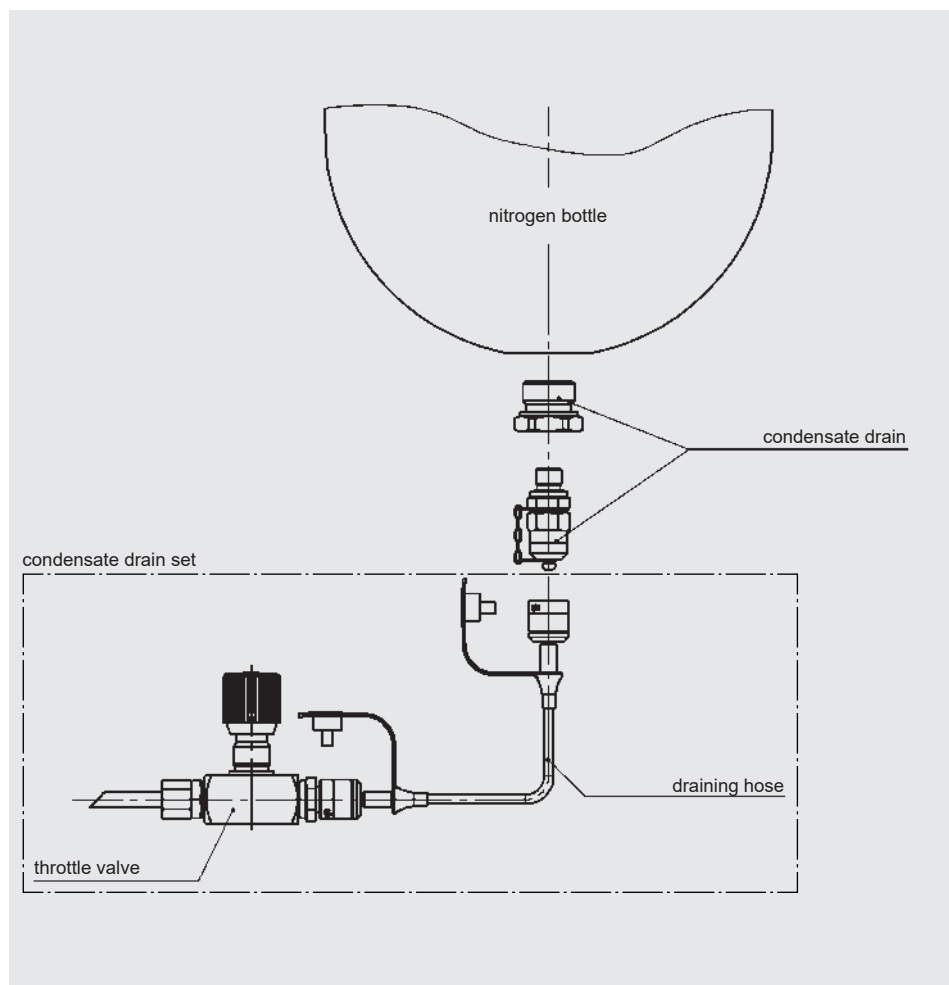

Designation	Length [m]	Part no.
Condensate drain G 3/4 – Minimes M16x1.5	–	3219496
	0.4	3472820
Condensate drain set	1	3472823
	1.6	3472824

4.3. NITROGEN CHARGING UNIT



HYDAC nitrogen charging units make it possible to rapidly and inexpensively charge or test the required gas pre-charge pressures in bladder, piston and diaphragm accumulators. They guarantee an optimal utilisation of standard commercial nitrogen bottles up to a residual pressure of 20 bar and a maximum pre-charge pressure of 350 bar. Portable, mobile and stationary N₂-Server versions are available.

For further information and technical data, see the following brochure:

- Nitrogen charging units N₂-Server No. 2.201

Higher pressures available on request.

5. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet


66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com





FPU

Charging and testing unit for bladder, piston and diaphragm accumulators

1. DESCRIPTION

1.1. FUNCTION

The HYDAC FPU charging and testing unit is used to charge accumulators with nitrogen or to check or change the existing pre-charge pressure in accumulators. For this purpose, the charging and testing unit is screwed onto the gas valve of the hydraulic accumulator and connected to a nitrogen bottle via a flexible hose with a pressure reducer (see diagram of design with FPU-1, right).

The A3 adapter is needed to charge and test the HYDAC bladder accumulator (included in scope of delivery).

HYDAC nitrogen charging units make it possible to rapidly and inexpensively charge or test the required gas pre-charge pressures in bladder, piston and diaphragm accumulators. They guarantee an optimal utilisation of standard commercial nitrogen bottles up to a residual pressure of 20 bar and a maximum pre-charge pressure of 350 bar. Portable, mobile and stationary N2-Server versions are available.

For further information and technical data, see catalogue section:

- Nitrogen charging units N2-Server No. 2.201

Higher pre-charge pressures up to 470 bar available on request.

Notice

All work with HYDAC charging and testing units must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.501.BA

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

1.2. DESIGN



The HYDAC charging and testing unit FPU-1 for bladder, piston and diaphragm accumulators consists of a primary body with the following:

- Spindle
- Check valve
- Release valve
- Pressure gauge

(for ports, see section 3.)

1.3. DIAGRAM OF CHARGING AND TESTING PROCEDURE

The following illustration shows the typical design of the charging and testing procedure for a HYDAC bladder accumulator used in connection with a nitrogen bottle (200 bar).

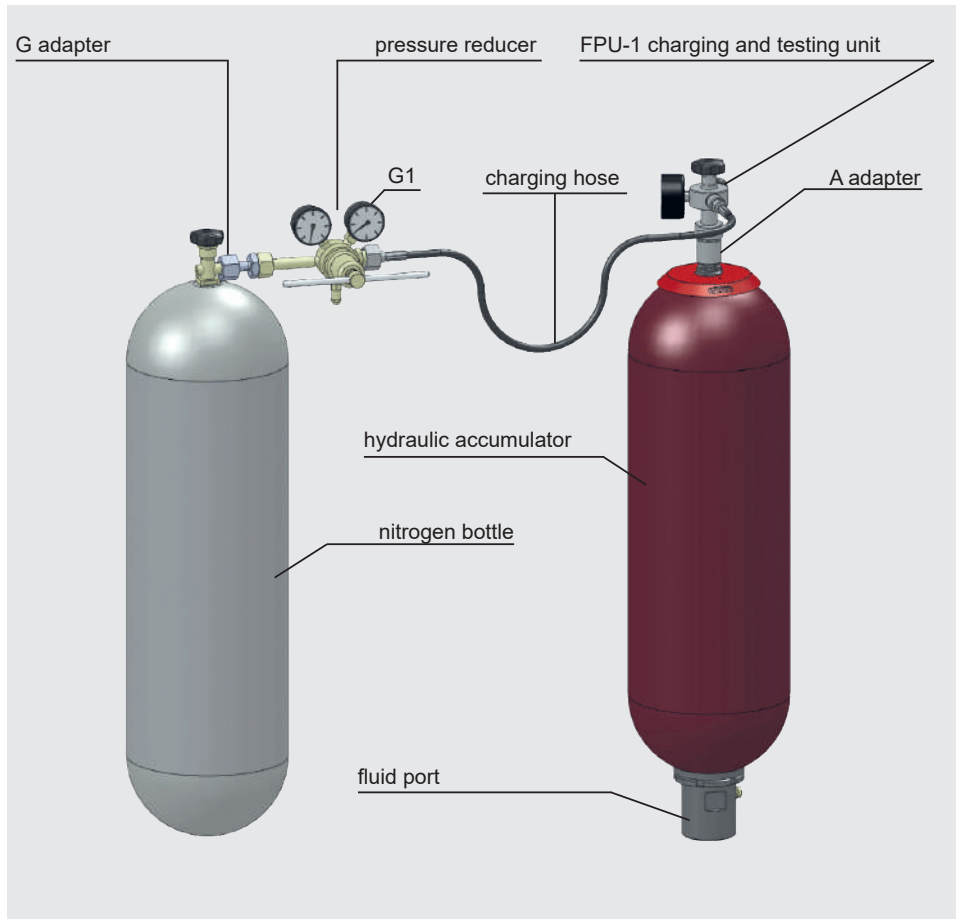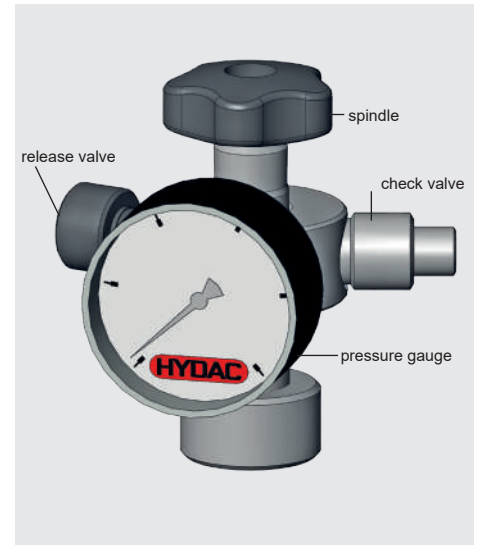

2. SPECIFICATIONS

2.1. MODEL CODE

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

FPU-1-350 / 250 F 2.5 G2 A3 DM200/100 K

Charging and testing unit

FPU-1-350 = standard ($p_{\max} = 350$ bar)

FPU-2-800 = high-pressure version ($p_{\max} = 800$ bar)

Pressure gauge display range

10 = 0 - 10 bar (0 - 145 psi)

25 = 0 - 25 bar (0 - 363 psi)

100 = 0 - 100 bar (0 - 1450 psi)

250 = 0 - 250 bar (0 - 3625 psi)

400 = 0 - 400 bar (0 - 5800 psi)

1000 = 0 - 1000 bar (0 - 14500 psi high-pressure version)

Charging hose

F = for nitrogen bottle 200 bar with connection W24,32x1/14
(DIN 477, Part 1)

FM = for nitrogen bottle 300 bar with connection M30x1.5
(DIN 477, Part 5 up to April 2002)

FW = for nitrogen bottle 300 bar with connection W30x2
(DIN 477, Part 5 from April 2002)

FH = for pressure booster systems with connection 9/16-18UNF

Charging hose length

Standard

2.5 = 2.5 m

4.0 = 4 m

High pressure version

6.0 = 6 m

Others on request

G adapter for nitrogen bottles (only FPU-1)

See table, section 3.5.

A adapter

A3 = 7/8-14UNF, incl. in FPU-1 scope of delivery as standard

A3H= 7/8-14UNF (high pressure version), not incl. in FPU-2 scope of delivery

For others, see table, section 3.4.

Pressure reducer

E.g. DM200/20 = 200 bar starting pressure, 20 bar back pressure

Accessories

K = protective case

For other accessories, see section 4.

2.2. FPU-1 STANDARD DESIGNS

The basic version of the FPU-1 ($p_{max} = 350 \text{ bar}$, $-10 \text{ °C} \dots +80 \text{ °C}$) is the minimum equipment required to test and set the pre-charge pressure (p_0) at the hydraulic accumulator. It comprises of the FPU-1, the charging hose and the A3 adapter for bladder accumulators and is supplied in a practical protective case.

The following versions are available:

Part no.*	Pressure gauge display up to [bar]	Pressure reducer [bar]	Charging hose [m]	G adapter
2114305	0 ... 25	-	2.5	-
2114401				G2
2121210				G3
2116738			4	-
4082127				G2
4426522				G3
4426524	0 ... 25	200/20	2.5	-
3652830				G2
3814960				G3
4426653			4	-
4426654				G2
3365217				G3
2115314	0 ... 100	-	2.5	-
2122515				G2
3243316				G3
2114842			4	-
3043585				G2
2120359				G3
4427109	0 ... 100	200/100	2.5	-
4427114				G2
4427126				G3
4427128			4	-
4427157				G2
4427158				G3
2114302	0 ... 250	-	2.5	-
2114309				G2
2114308				G3
2114303			4	-
2116743				G2
2116779				G3
3187297	0 ... 250	200/100	2.5	-
4427160				G2
4427161				G3
4427162			4	-
4427163				G2
4427164				G3
4427304	0 ... 250	200/170	2.5	-
4328598				G2
4427335				G3
4427336			4	-
4427339				G2
4427341				G3
2114307	0 ... 400	-	2.5	-
2114605				G2
2115692				G3
2114304			4	-
2122119				G2
2115656				G3
4427342	0 ... 400	200/170	2.5	-
4427344				G2
4427355				G3
4427356			4	-
4427357				G2
4427358				G3

* Preferred models, others on request

2.3. FPU-1 SPECIAL DESIGNS

In addition to the standard FPU-1, HYDAC supplies special designs, such as:

- designs with a digital pressure gauge
- designs with additional ports (e.g. Minimes M16x2)
- designs for aggressive media

We are able to provide detailed information on request.

2.4. HIGH PRESSURE VERSIONS



The FPU-2 was specifically designed for high pressure applications. Just like the FPU-1, the FPU-2 can be used for universal applications. It can be screwed on directly for charging and/or testing HYDAC piston and diaphragm accumulators. In connection with a HYDAC bladder accumulator, the A3H high pressure adapter must be used. This is not included in standard delivery.

2.4.1 Technical Data

Model code:

See section 2.1.

Max. operating pressure:

800 bar

Pressure gauge display range:

0 - 1000 bar (0 - 14500 psi)

Material:

Stainless steel 1.4313

Operating temperature:

$-10 \text{ °C} \dots +80 \text{ °C}$

2.4.2 FPU-2 standard designs

The following versions are exclusively suitable for use with a pressure booster system.

Other versions on request.

Models without protective case




Designation	Part no.
FPU-2-800/1000F6	4043456
FPU-2-800/1000F6A3H	4043455

Models with protective case




Designation	Part no.
FPU-2-800/1000F6K	4029954
FPU-2-800/1000F6A3HK	4023260

3. DIMENSIONS AND CONNECTIONS

3.1. DESIGN OF FPU-1 CHARGING AND TESTING UNIT WITH ADAPTER FOR HYDAC ACCUMULATOR

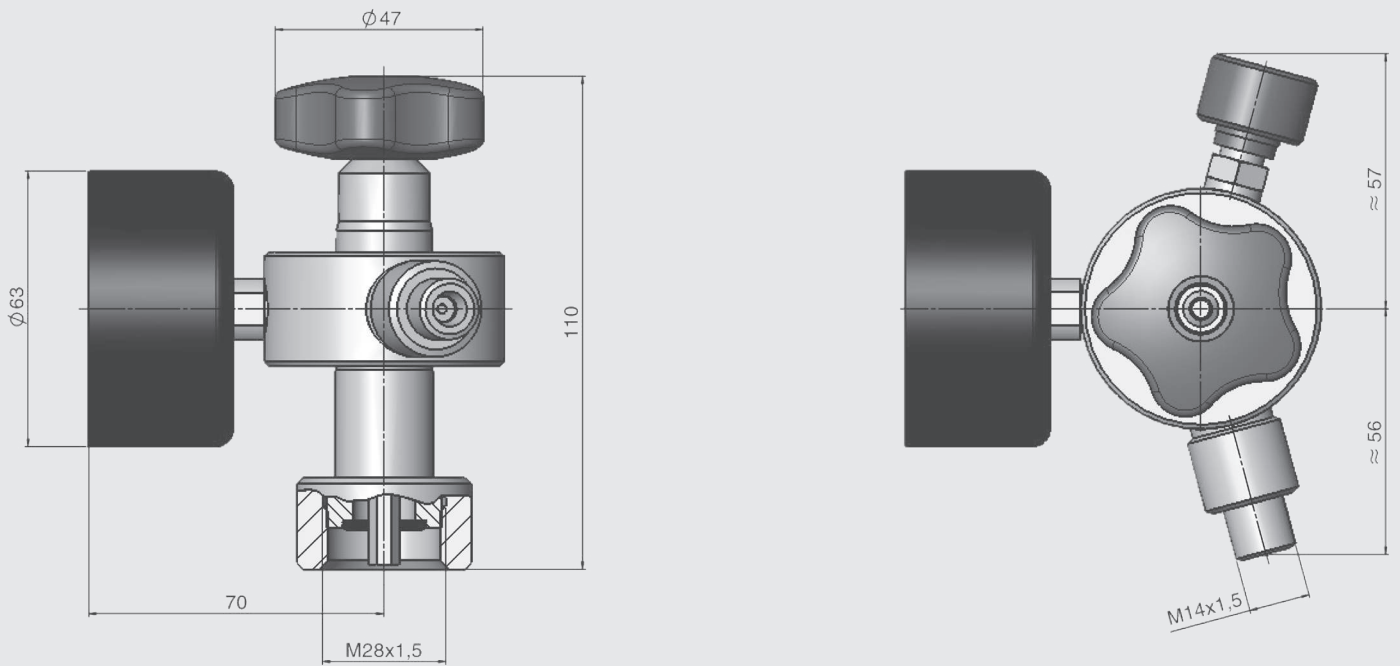

D4 adapter
(see section 4.)







bladder accumulators
330-0.5 / 400-0.5

bladder accumulators
≥ 1l

gas valve
to ISO 10945

piston and diaphragm
accumulators

3.2. DESIGN OF FPU-2 CHARGING AND TESTING UNIT WITH ADAPTER FOR HYDAC ACCUMULATOR

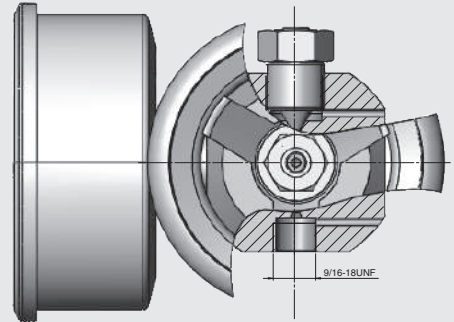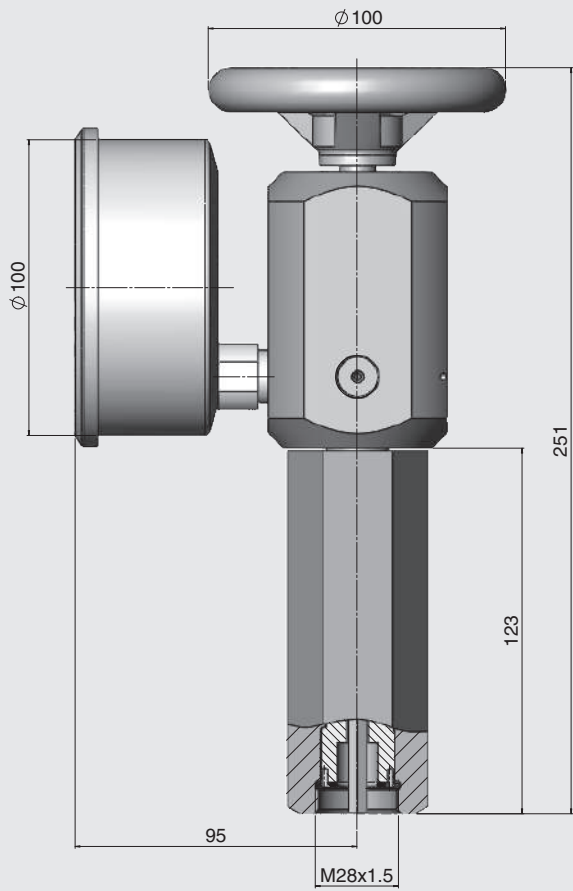

bladder accumulators
≥ 1 l



piston and diaphragm
accumulators

3.3. CHARGING HOSES


Charging hoses are designed for the particular maximum permitted operating pressure marked on them and 10,000 charging processes.

(HYDAC charging hoses comply with DIN EN ISO 4413 and DIN EN 853 to 857)

3.3.1 Charging hoses for nitrogen bottles up to 200 bar

F charging hose

Connection to DIN 477, Part 1

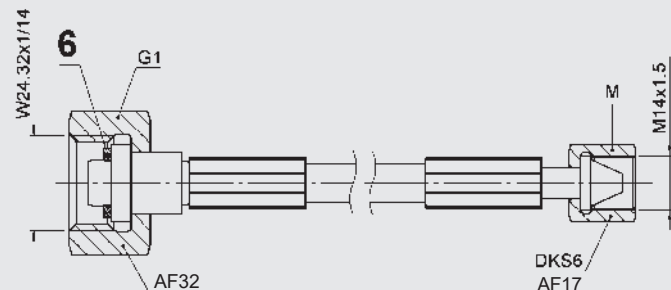


Type	Length [m]	Part no.
F charging hose	2.5	236514
	4	236515
	10	373405
	15	2115552
	20	2109765
	28	2109574

3.3.2 Charging hoses for nitrogen bottles up to 300 bar


FM charging hose

Connection to DIN 477, Part 5 up to April 2002

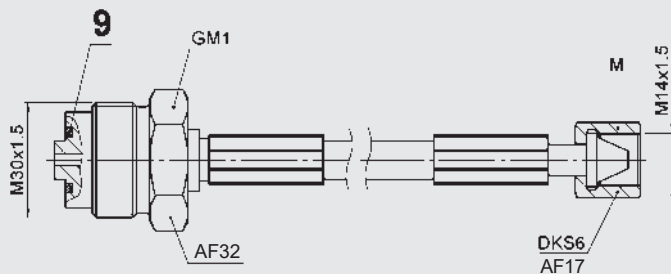

FW charging hose


Connection to DIN 477, Part 5 from April 2002

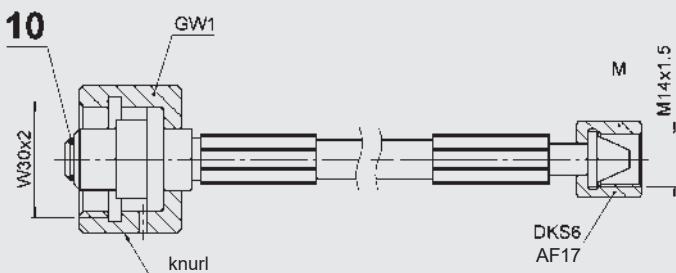

Type	Length [m]	Part no.
FM charging hose	2.5	3019417
	4	3019418
FW charging hose	2.5	3019419
	4	3019420

3.3.3 Pressure hose for pressure booster systems

FH charging hose

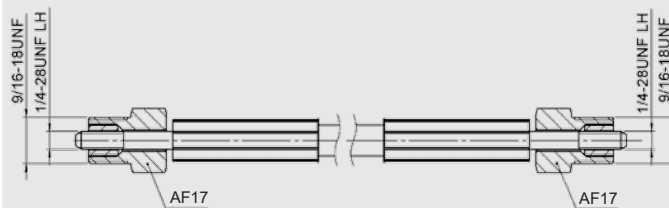

Type	Length [m]	Part no.
FH charging hose	6	6169682


3.4. ADAPTERS FOR FPU

3.4.1 FPU-1


The FPU-1 can be screwed onto piston and diaphragm accumulators directly. In connection with a bladder accumulator, the A3 adapter must be used. The A3 adapter is included in the scope of delivery as standard.

Additional adapters can be used to charge and test other brands of accumulator.


The following adapters are to be used exclusively with the FPU-1, see also section 3.1.

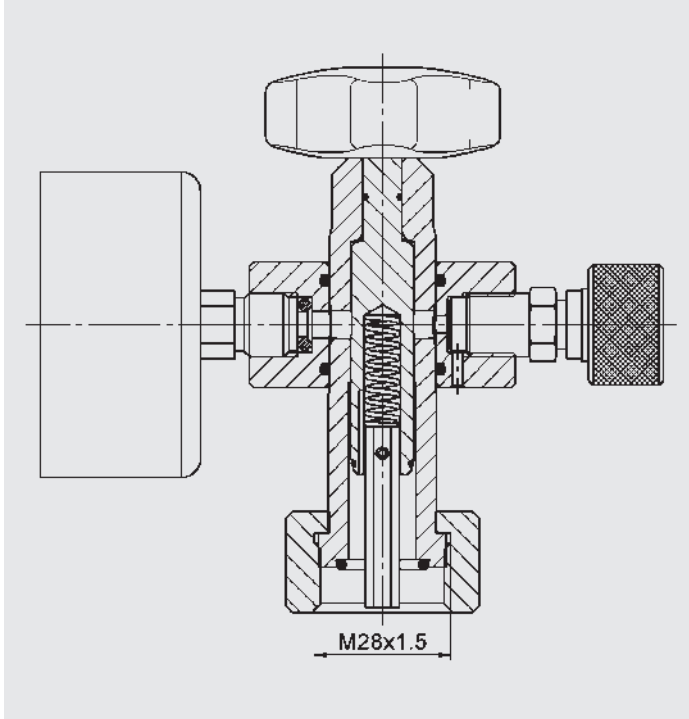


A3 (part no. 291533)




A4 (part no. 291536)




A5 (part no. 291531)




A6 (part no. 2108819)

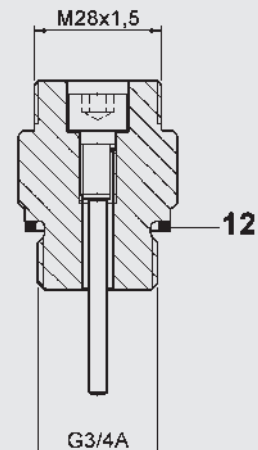


A1 (part no. 361619)




A2 (part no. 361605)




A7 (part no. 2110629)




A11 (part no. 3018210)




A8 (part no. 2124524)




A12 (part no. 3203185)




A9 (part no. 2128638)



A13 (part no. 3911267)



A10 (part no. 2128849)




3.4.2 FPU-2


The FPU-2 can be screwed onto piston and diaphragm accumulators directly. In connection with a bladder accumulator, the A3H adapter must be used. This is not included in standard delivery.

Additional adapters can be used to charge and test other brands of accumulator.


The following adapters are to be used exclusively with the FPU-2, see also section 3.2.

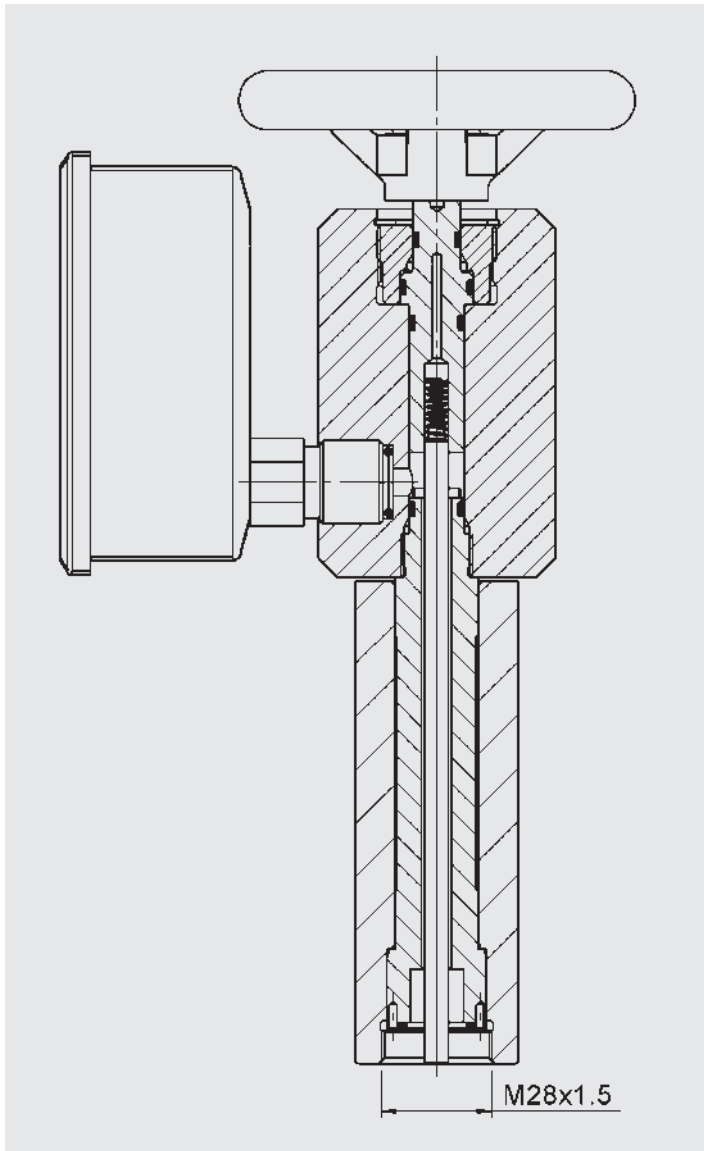


A3H (part no. 3963048)




A7H (part no. 4237124)



A9H (part no. 4322422)




A12H (part no. 4237689)




3.5. ADAPTER FOR FPU-1

The FPU-1 can be used with nitrogen bottles from various countries. Depending on the particular country of manufacture for the nitrogen bottles (see list of countries), HYDAC offers the following G adapters, exclusively for use with the FPU-1. The FPU-2 is connected to a pressure booster system.


G 2 (part no. 236376)

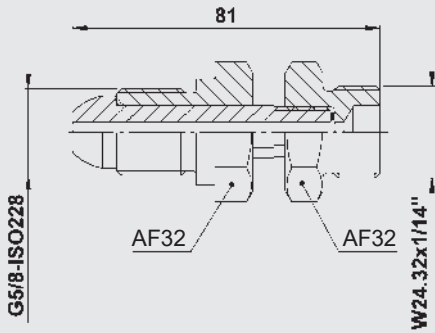


G 6 (part no. 2103423)

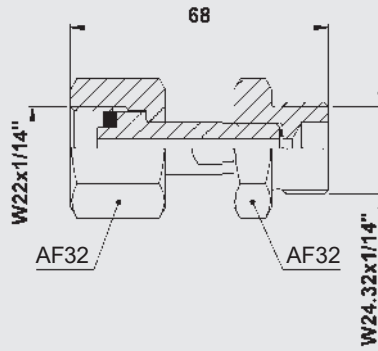


G 10 (part no. 2103427)




G 3 (part no. 2103421)




G 7 (part no. 236377)




G 11 (part no. 3018678)

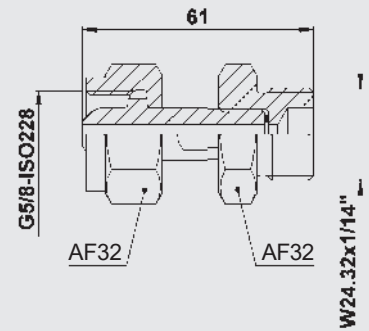


G 4 (part no. 236374)

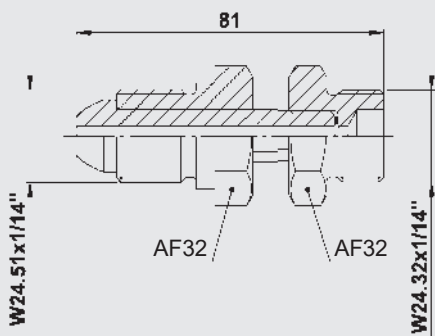


G 8 (part no. 2103425)




G 12 (part no. 3195556)

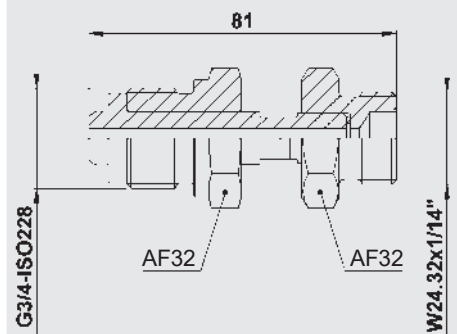


G 5 (part no. 236373)

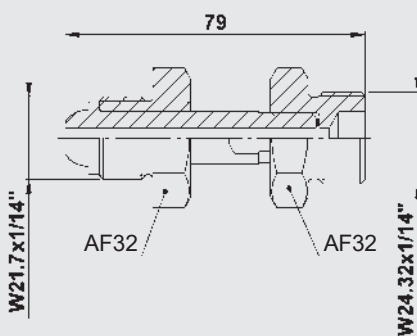

G 9 (part no. 241168)

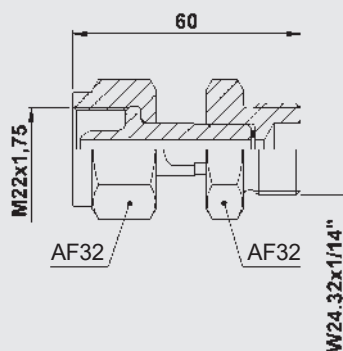

G 13 (part no. 3787884)

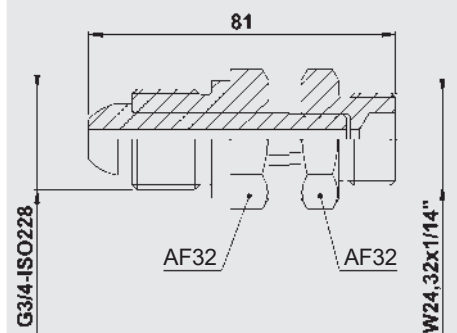

List of countries

Country	Type / part no.												
	G1 ¹⁾	G2 236376	G3 2103421	G4 236374	G5 236373	G6 2103423	G7 236377	G8 2103425	G9 241168	G10 2103427	G11 3018678	G12 3195556	G13 3787884
Africa ³⁾													
Albania													•
Algeria			•										
Argentina		•											
Australia												•	
Austria	•												
Bahamas		•											
Bahrain			•										
Bangladesh		•											
Barbados		•											
Belgium	•												
Bolivia								•					
Brazil				•									
Britain		•											
Bulgaria			•										
Burma		•											
Canada				•									
Chile								•					
China											•		
Colombia								•					
Costa Rica		•											
Cyprus		•											
Czech Republic	•												
Denmark	•												
Djibouti			•										
Dominican Republic								•					
Ecuador								•					
Egypt			•										
Ethiopia		•											
Fiji		•											
Finland	•												
France			•										
Gabon			•										
Gambia		•											
Germany	•												
Ghana		•											
Greece		•											
Guatemala								•					
Guinea			•										
Guyana								•					
Honduras								•					
Hong Kong		•											
Hungary			•										
India		•											
Indonesia		•											
Ireland		•											
Italy					•								
Ivory Coast			•										
Jamaica		•											
Japan						•							
Jordan			•										
Kenya		•											
Korea							•						
Kuwait			•										
Lebanon			•										
Libya			•										
Malawi		•											
Malaysia		•											
Malta		•											
Mauritius			•										
Mexico			•										
Morocco			•										
Netherlands	•												
New Zealand		•											
Nigeria			•										
Norway	•												
Oman			•										
Pakistan		•											
Paraguay								•					
Peru								•					
Philippines		•											
Poland	•												
Portugal		•											
Puerto Rico				•									
Qatar			•										
Romania			•										
Russia										•			
Saudi Arabia			•										
Singapore		•											
Spain			•										
Sri Lanka		•											
Sudan		•											
Suriname		•											
Sweden	•												
Switzerland	•												
Taiwan									•				
Tanzania		•											
Thailand		•											
Trinidad/Tobago										•			
Tunisia			•										
Turkey		•											
Ukraine										•			
United Arab Emirates			•										
Uruguay								•					
USA				•									
Venezuela										•			
Vietnam		•											
Yugoslavia ²⁾										•			
Zambia		•											

¹⁾ = already fitted to hose

²⁾ = Bosnia, Herzegovina, Croatia, Macedonia, Slovenia

³⁾ = Angola, Botswana, Lesotho, Mozambique, Namibia, Somalia, South Africa, Swaziland, Zimbabwe

4. ACCESSORIES

4.1. PROTECTIVE CASE

To protect the FPU from becoming contaminated or damaged, with foam insert and prefabricated recesses to hold all parts and any accessories (adapters, tools, etc.).

Different types of case are available, depending on customer requirements.

	Weight approx. [kg]	Outer dimensions [mm]
FPU-1 (basic version)	Without case	1.4 –
	With case	3 460x350x120
FPU-2	Without case	8.2 –
	With case	14.2 530x430x180

4.2. GAS SAFETY VALVE FOR FPU-1


Provides protection by reducing the pressure in a controlled way if pressure exceeds the permitted level unexpectedly, see catalogue section:

- Safety equipment for hydraulic accumulators No. 3.552

4.3. D4 ADAPTER FOR FPU-1


D adapter for bladder accumulator < 1 litre (see section 3.)

D4 = 5/8-18UNF (part no. 366374)

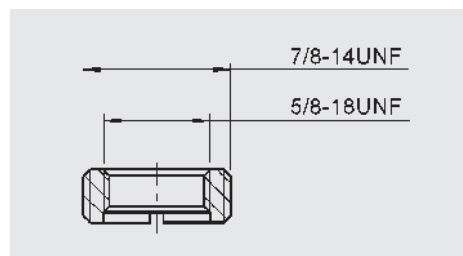

4.4. GSV6-10-CE INTERMEDIATE PIECE FOR FPU-1

Intermediate piece for installing the GSV 6 gas safety valve between the 200 bar nitrogen bottle and the FPU-1 Charging and Testing Unit.

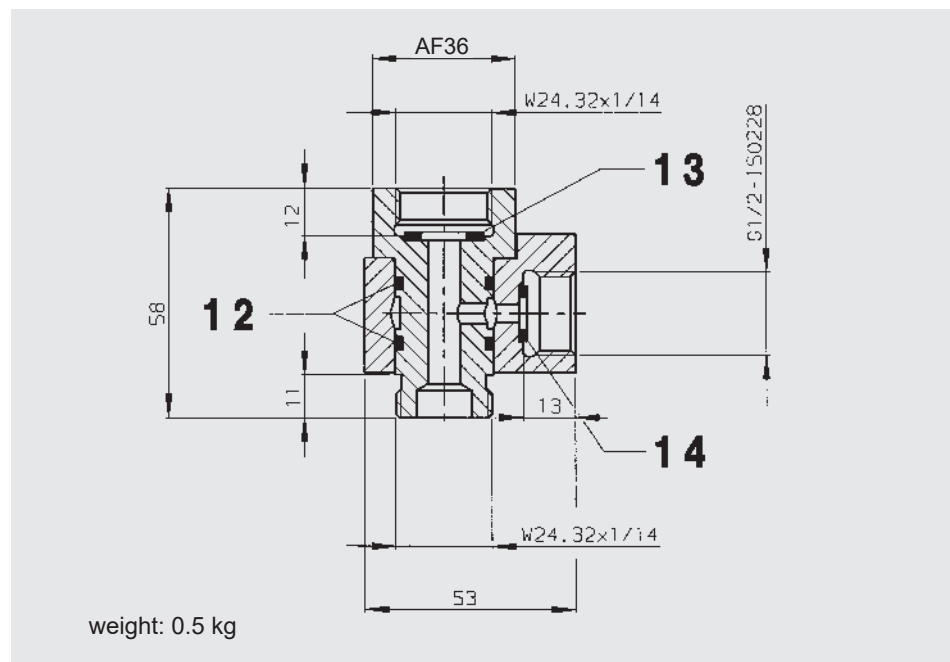

Description	Quantity	Item	Part no.
GSV6-10-CE intermediate piece	-	-	242558
Seal kit for intermediate piece	-	-	2117287
consisting of:			
O-ring 20x2.5x2	2	12	-
Seal ring 20x11.5x2	1	13	-
Seal ring 14x8.5x2	1	14	-

4.5. PRESSURE REDUCING VALVE

For adjusting the required pre-charge pressure between the nitrogen bottle and the accumulator.

4.5.1 Pressure reducing valve for 200 bar nitrogen bottles

Inlet: lock nut W24, 32x1/14-DIN477, Part 1

Outlet: external thread W24, 32x1/14-DIN 477, Part 1

Starting pressure [bar]	Back pressure [bar]	Part no.
200	20	635409
	100	635411
	170	635412

4.5.2 Pressure reducing valve for 300 bar nitrogen bottles

Inlet: lock nut W30x2-DIN 477, Part 5


Outlet: external thread W24, 32x1/14-DIN 477, Part 1

Starting pressure [bar]	Back pressure [bar]	Part no.
300	20	6004020
	100	6004021
	170	6004022
	300*	6004023

* For back pressures >200 bar, the outlet has an external thread W30x2-DIN 477, Part 5

5. SPARE PARTS, ADAPTERS AND TOOLS

5.1. SPARE PARTS FOR FPU-1 AND FPU-2

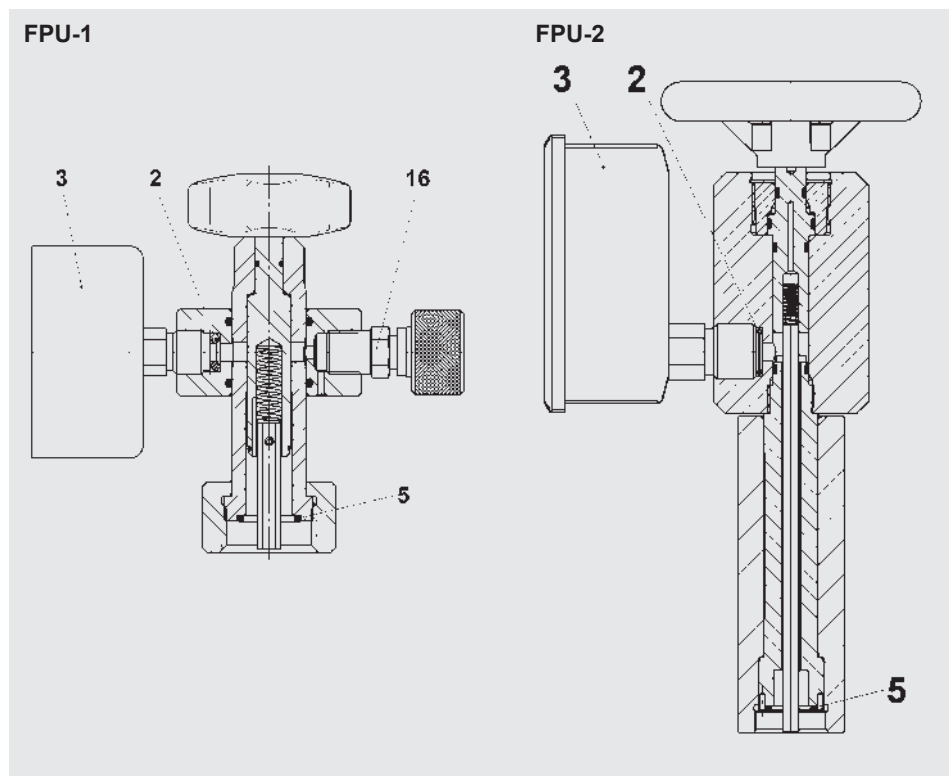

Description	Item	FPU-1		FPU-2	
		Part no.	Quantity	Part no.	Quantity
Seal kit for FPU consisting of:		2117669	1	4295673	
Rhombic seal	2	–	1	–	1
O-ring 15x2	5	–	1	–	1
Seal ring	6	–	1	–	–
O-ring 11x2	7	–	1	–	–
O-ring 11x2.5	9	–	1	–	–
O-ring 5.7x1.9	10	–	1	–	–
Pressure gauge					
0 - 10 bar	3	635139	1		
0 - 25 bar	3	635140	1		
0 - 100 bar	3	635141	1	–	
0 - 250 bar	3	635142	1		
0 - 400 bar	3	635143	1		
0 - 1000 bar	3	–		6167756	1
Release valve	16	3103471	1	–	

5.2. SPARE PARTS FOR ADAPTER

Description	Item	FPU-1, FPU-2	
		Part no.	Quantity
Seal kit for FPU adapter consisting of:	–	3269153	
O-ring 11x2	7	–	3
O-ring 9x2	8	–	3
Seal ring 9.3x13.3x1	11	–	3
Seal ring 27x32x2	12	–	1
O-ring 6x1.2	13	–	1
O-ring 19x2	14	–	1
Seal ring for adapter A9	15	–	1
Seal ring 6x13x2	50*	–	1

* Only suitable for A7 adapter up to May 2006

5.3. TOOLS FOR FPU-1

Designation	Part no.
Wrench 14x15	1011065
Allen key AF6	1005164
Torque wrench	3136470
Gas valve removal tool	616886

6. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com

Safety and shut-off block SAF/DSV



1. DESCRIPTION

1.1. GENERAL


The HYDAC safety and shut-off block is a hydraulic accessory element that is used to protect against excess pressure on the fluid side and to shut-off and relieve hydraulic accumulators.

It takes into account the applicable safety regulations according to DIN EN ISO 4413 and the German Industrial Safety Regulation (BetrSichV).

The HYDAC pressure relief valve (DB12) is used in the SAF series. It is a direct-acting pressure relief valve in a poppet valve construction with excellent opening and closing characteristics. This version of the DB12 complies with the requirements of the European Pressure Equipment Directive (PED) with CE marking and is supplied with a declaration of conformity and operating instructions.

**The operating instructions must be observed!
No. 5.169.B**

1.1.1 Circuit diagram

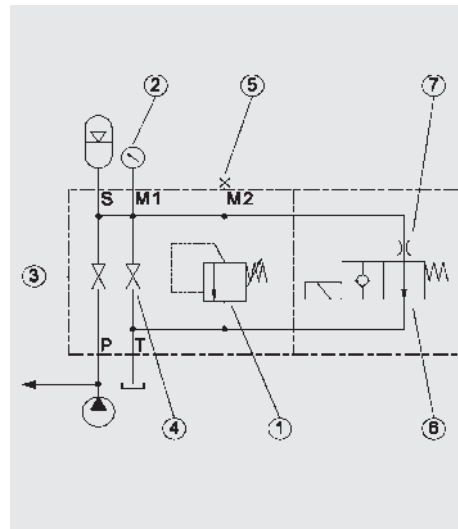

DB12 pressure relief valve

② M1 connection
(optional pressure gauge available)
ISO 228 - G 1/4 (SAF10, SAF8)
ISO 228 - G 1/2 (all others)

③ Shut-off valve

④ Pressure release valve

⑤ M2 connection (e.g. for p_0 -Guard)
ISO 228 - G 1/4 (all sizes)

These devices are combined in a compact, space-saving HYDAC safety and shut-off block. The following devices are also available:

⑥ Solenoid-operated release valve
(optional for type SAF...E...)

⑦ Throttle


S Hydraulic accumulator connection

P Pump connection

T Tank connection

Application limits

DB12-CE p-Q graph, see ①

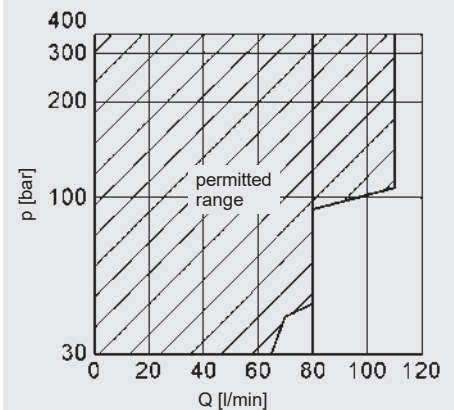

1.1.2 Product advantages

The compact combination of components considerably simplifies the connection of a consumer to the hydraulic system and provides the following benefits:

- Minimum of space, maintenance and piping required. Up to 10 fewer pipe fittings are necessary compared to individual piping.
- Considerable reduction in installation time.
- Connections for various accumulator designs and manufacturers are available – all imperial and metric thread types as well as manifold-mounted and weld nipple connections.
- Additional valves such as pilot-operated check valves, flow control valves and combined flow control and check valves can be fitted to system connection P.

1.2. DESIGN

The SAF safety and shut-off block consists of a valve block, an integrated HYDAC pressure relief valve, a main shut-off valve and a manually operated pressure release valve. The necessary pressure gauge connections are provided in addition to the tank connection.

In addition, an optional solenoid-operated 2-way directional valve allows automatic discharge of the accumulator or consumer and therefore of the hydraulic system in an emergency or for shut-down.

1.3. CONNECTIONS

The safety and shut-off block has the following connections:

S – Hydraulic accumulator connection

P – Pump connection
Connection of the SAF to the system

T – Tank connection
The piping leading to the tank must be installed separately.
This ensures that the flow can be channelled away to the tank unpressurised when the DB12 pressure relief valve is opened.

M1 – With optional pressure gauge
ISO 228 - G 1/4 (SAF10, SAF8)
ISO 228 - G 1/2 (all others)

M2 – E.g. for p_0 -Guard
ISO 228 - G 1/4 (all sizes)

1.4. SPECIFICATIONS

1.4.1 Operating fluids

Mineral oil to DIN 51524
Part 1 and Part 2
(other fluids on request)

Viscosity range

min. 10 mm²/s
max. 380 mm²/s

Filtration

Max. permitted contamination level of the operating fluid to ISO 4406 Class 21/19/16 or SAE AS 4059 Class 11. We therefore recommend a filter with a minimum retention rate of $\beta_{20} \geq 100$. The fitting of filters and regular replacement of the filters guarantees correct operation, reduces wear and extends the service life.

1.4.2 Permitted operating temperature

Standard design
-10 °C ... +80 °C
(ambient temperature for E type limited to -10 °C ... +60 °C)

Low-temperature version
-40 °C ... +80 °C

1.4.3 Max. operating pressure

400 bar

1.4.4 Model with solenoid-operated pressure release

Type

Solenoid-operated by means of pressure-tight, oil-immersed, single-stroke solenoids in accordance with VDE 0580. Actuating solenoid with male connector to DIN 43650, standard for general industrial applications, available for 24 V DC and 230 V AC.

Type of voltage

DC solenoid

When connected to AC voltage, the necessary DC voltage is produced by means of a bridge rectifier connector.

VOLTAGE TOLERANCE

±15 % of the nominal voltage

Nominal current

Dependent on the nominal voltage

24 V DC 0.80 A

230 V AC 0.11 A

Power consumption

$p_{20} = 18 \text{ W}$

DUTY CYCLE

100 % DC = CO (continuous operation)

Switching time

This depends on the symbol, pressure at the individual ports and the flow rate

WSM06020Y:

on: 50 ms

off: 35 ms

WSM06020Z:

on: 35 ms

off: 50 ms

1.4.5 Notice

All work with HYDAC safety and shut-off blocks must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

No. 3.551.BA

Relevant PDF documents can be

accessed at:

www.hydac.com » Downloads »


Documents » Accumulator Division

1.5. STANDARD DESIGNS

1.5.1 Model with manually operated pressure release

The basic model of the safety and shut-off block has a manually operated pressure release valve, code "M", and a direct-acting pressure relief valve.

Sizes: SAF10, SAF20, SAF32

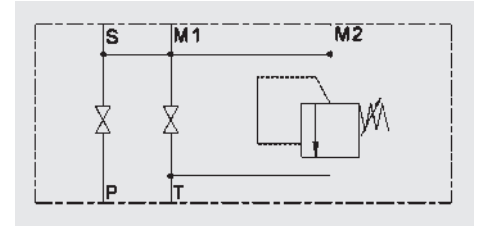


1.5.2 Model with solenoid-operated pressure release


The E type safety and shut-off block has a solenoid-operated 2-way directional valve for automatic pressure release of the accumulator and the hydraulic system.

Sizes: SAF10, SAF20, SAF32

Normally open "Y"

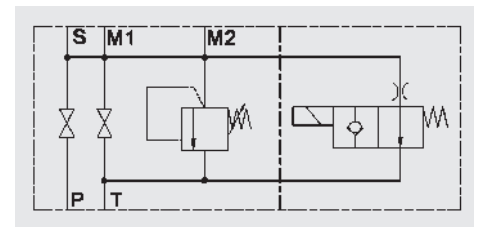

Normally open "Z"

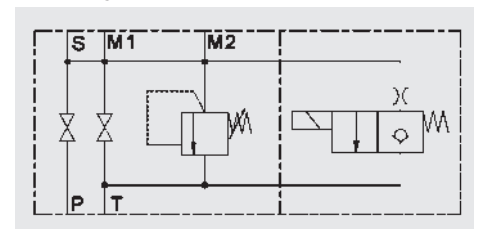

1.6. Δp -Q GRAPHS FOR SAF


Measured at:

$v = 32 \text{ mm}^2/\text{s}$


$t_{\text{oil}} = 40 \text{ }^\circ\text{C}$

Operating pressure = 400 bar
with DB12 pressure relief valve








1.6.1 Flow from the pump to the accumulator

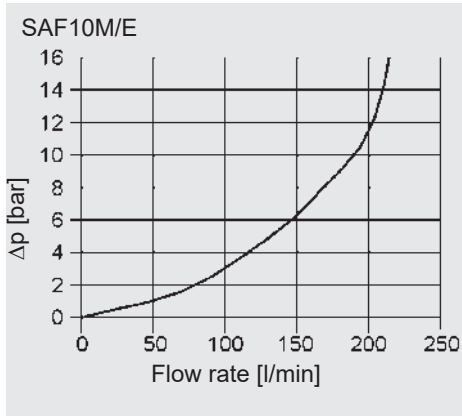

1.6.2 Flow from the accumulator via the pressure release valve to the tank

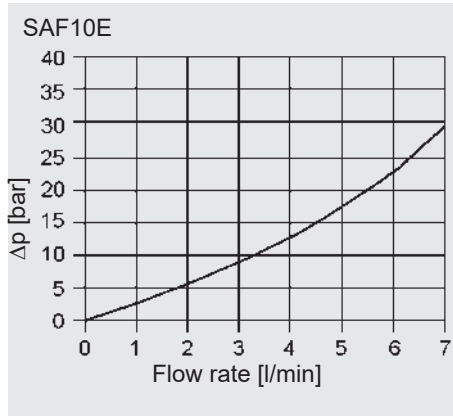

1.6.3 Flow from the accumulator via the pressure release valve to the tank

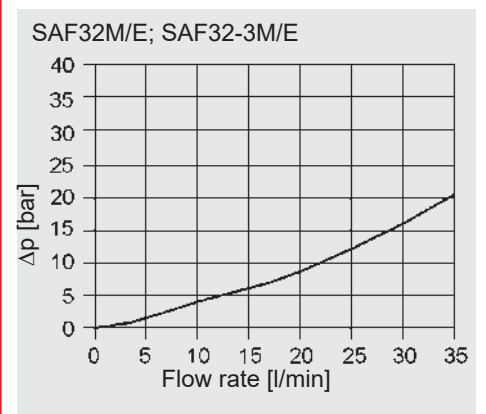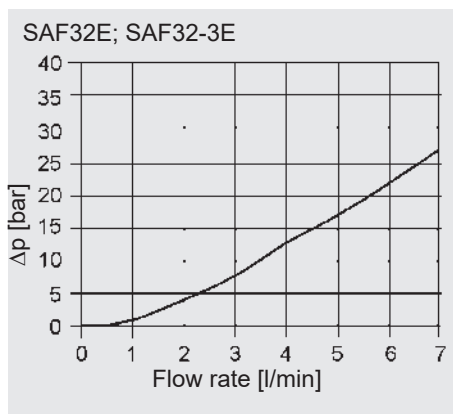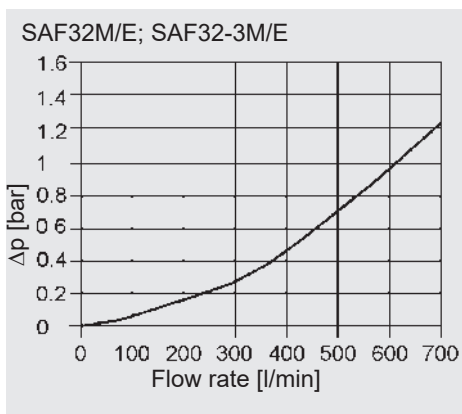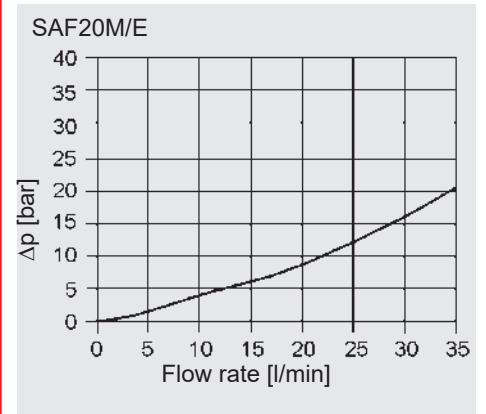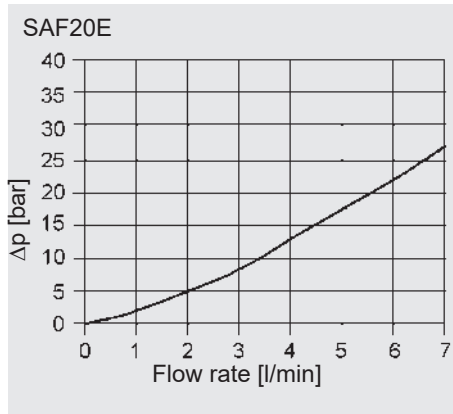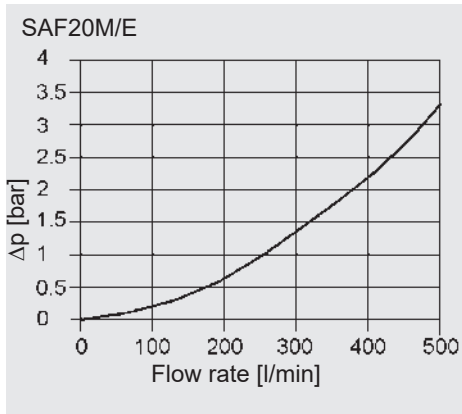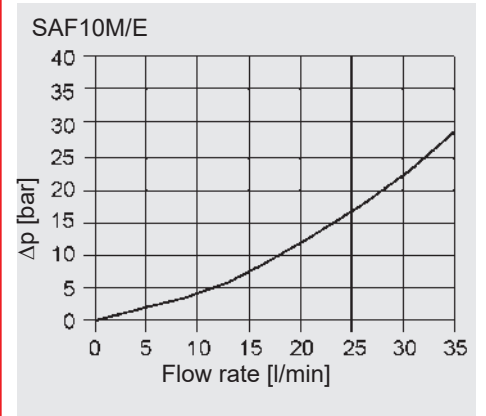

2. MODEL CODE FOR SAF

SAF 20 E 1 2 Y 1 T 210 A - S 13 - LPI - A9

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

Safety and shut-off block

Series SAF

Nominal size of main shut-off valve

- 8 = DN8
- 10 = DN10
- 20 = DN20
- 32 = DN32
- 32-3 = DN32 with 3 size 12 pressure relief valves
- 50 = DN50

Type

- M = manual discharge
- E = solenoid-operated and manual discharge

Block material ¹⁾

- 1 = carbon steel
- 3 = stainless steel
- 6 = carbon steel (low temperature)

Seal material (elastomer)

- 2 = NBR
- 5 = EPDM ⁶⁾
- 6 = FKM
- 7 = other

Type - poppet valve ⁴⁾

- Y = normally open (2/2 directional valve WSM06020Y)
- Z = normally closed (2/2 directional valve WSM06020Z, only up to 350 bar)

Voltage type – poppet valve ⁴⁾

- 1 = 24 VDC
- 2 = 115 VAC
- 3 = 230 VAC
- 6 = 120 VAC
- 7 = other

Pressure relief valve

- T = pressure setting with TÜV
- N = pressure setting without TÜV ⁶⁾

Pressure setting

e.g. 210 bar

Threaded connection to

- A = ISO 228 (BSP) ³⁾
- B = DIN 13, to ISO 965/1 (metric) ²⁾
- C = ANSI B1.1 (UNF, O-ring seal to SAE) ²⁾

Adapter

to accumulator (see section 8.)
e.g. S13 = ISO 228 - G 2A

Additional equipment (see section 5.)

- L = lockable main shut-off valve (locking device)
- LPI = model L with additional position monitoring (inductive proximity switch)
- LPM = model L with additional position monitoring (mechanical limit switch with roller lever)
- LS = lockable pressure release valve

Certification code DB12 ⁵⁾


No details = European Pressure Equipment Directive (PED)
A6 = Russia, and others
A9 = China

Accessories – please give full details when ordering, see section 8.

- ¹⁾ Dependent on type and pressure rating
- ²⁾ On request
- ³⁾ In conjunction with SAF8 = 9/16-18UNF or ISO 228 - G 1/4 (BSP)
- ⁴⁾ Only for type E
- ⁵⁾ For further information, see catalogue section Accumulator Technology, No. 3.000, section 4.
- ⁶⁾ Only with pressure relief valve N

3. DIMENSIONS

3.1. SAF10 SAFETY AND SHUT-OFF BLOCK SIZE 10

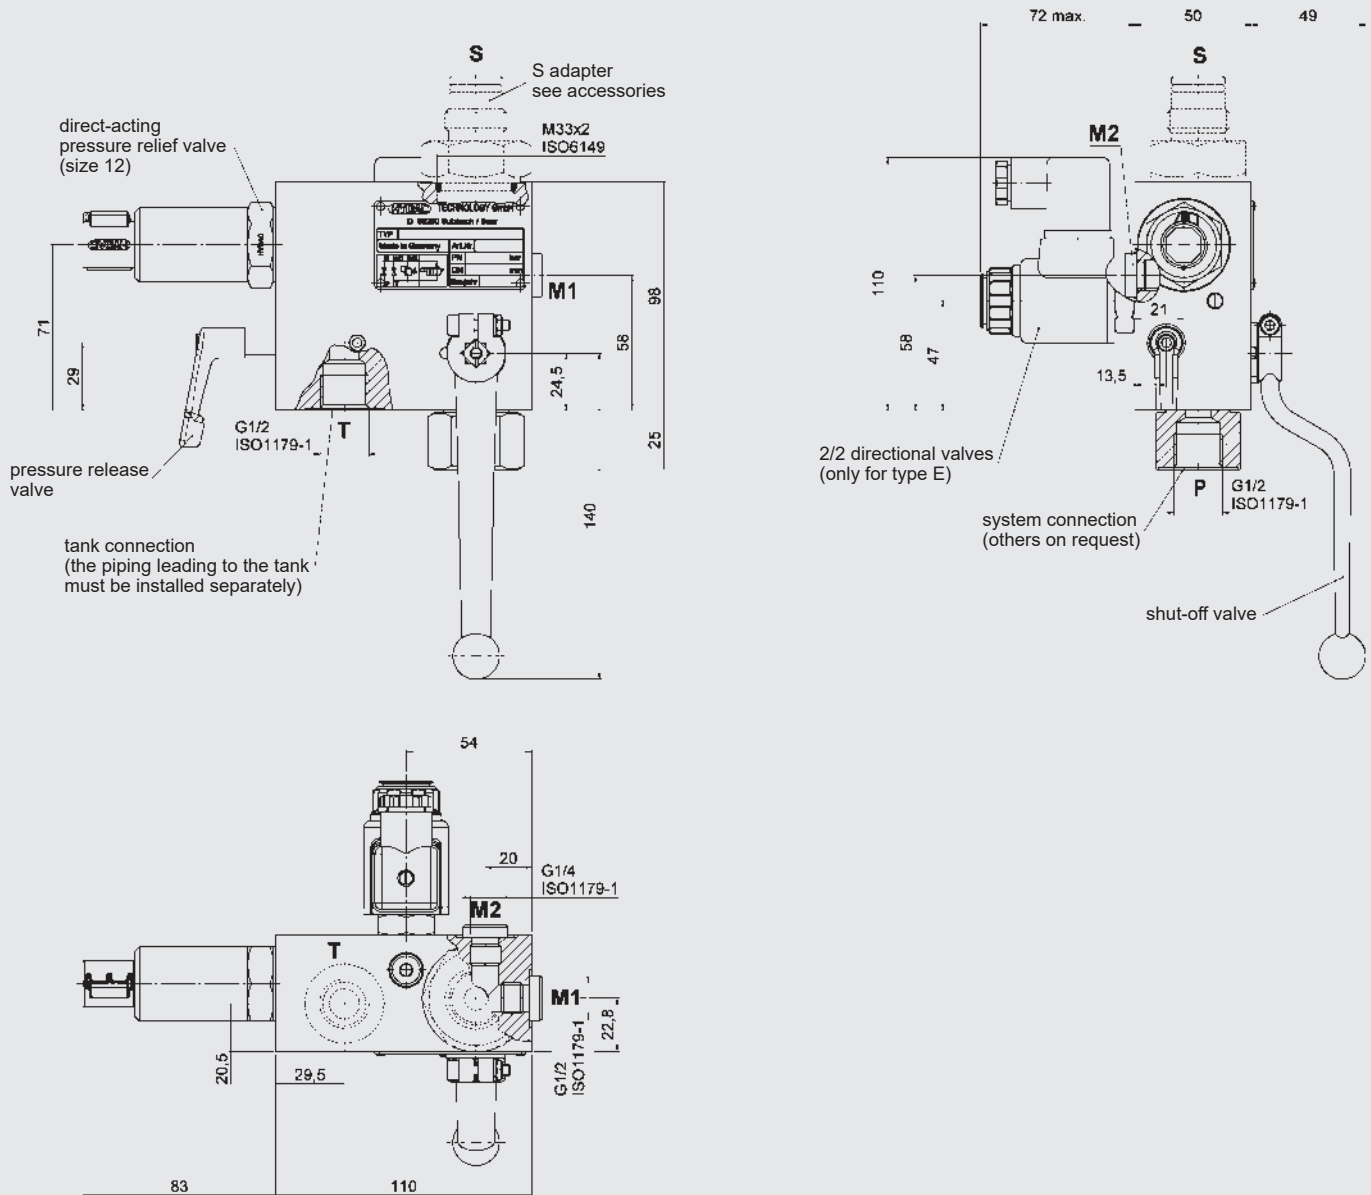


Type	Weight
SAF10M...	4.2 kg
SAF10E...	4.6 kg

SAF10 Standard types

Type	Part no.	Type	Part no.
SAF10M12T400A	2121582	SAF10E12Y1T400A	2125858
SAF10M12T350A	2122208	SAF10E12Y1T350A	2122210
SAF10M12T330A	2121236*	SAF10E12Y1T330A	2122211*
SAF10M12T315A	2121121	SAF10E12Y1T315A	2122212
SAF10M12T300A	2121354	SAF10E12Y1T300A	2122213
SAF10M12T250A	2121353	SAF10E12Y1T250A	2122214
SAF10M12T210A	2121346	SAF10E12Y1T210A	2121662
SAF10M12T200A	2121351	SAF10E12Y1T200A	2122215
SAF10M12T150A	2121345	SAF10E12Y1T150A	2122216
SAF10M12T100A	2121344	SAF10E12Y1T100A	2122041
SAF10M12T070A	2121350	SAF10E12Y1T070A	2122217
SAF10M12T050A	2122207	SAF10E12Y1T050A	2122218
SAF10M12T035A	2121349	SAF10E12Y1T035A	2122219

* Preferred models

3.2. SAF20 SAFETY AND SHUT-OFF BLOCK SIZE 20

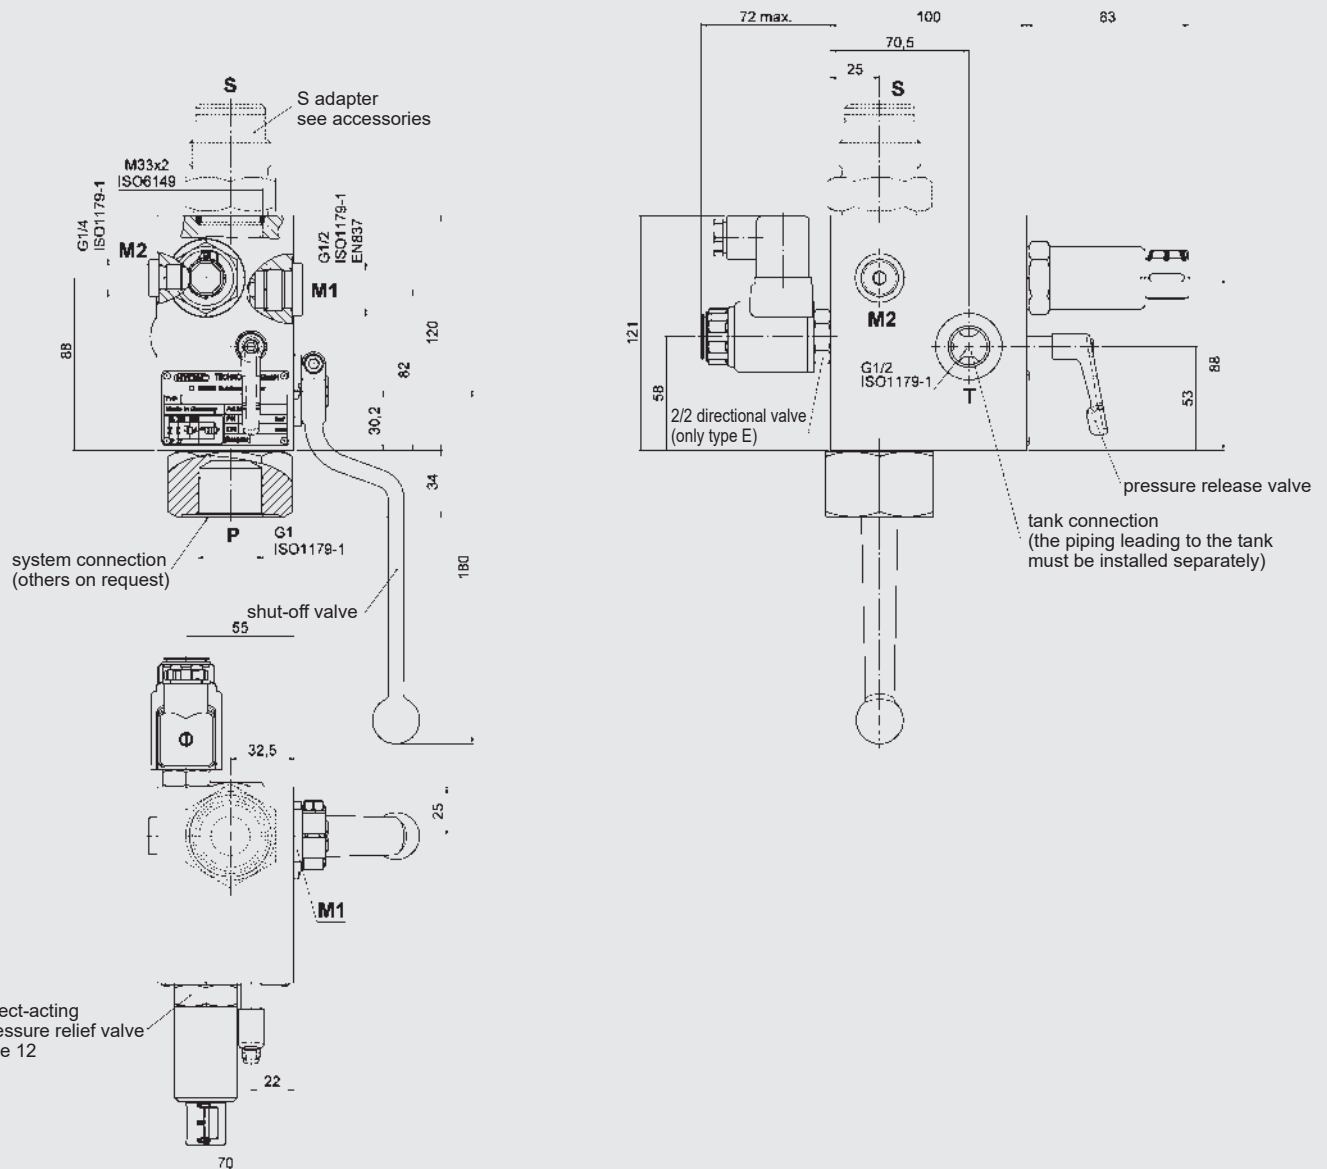


Type	Weight
SAF20M...	6.8 kg
SAF20E...	7.2 kg

SAF20 Standard types

Type	Part no.	Type	Part no.
SAF20M12T400A	2120317	SAF20E12Y1T400A	2121022
SAF20M12T350A	2120434	SAF20E12Y1T350A	2121979
SAF20M12T330A	2120323*	SAF20E12Y1T330A	2120394*
SAF20M12T315A	2120324	SAF20E12Y1T315A	2120833
SAF20M12T300A	2120332	SAF20E12Y1T300A	2120836
SAF20M12T250A	2120432	SAF20E12Y1T250A	2120851
SAF20M12T210A	2120319	SAF20E12Y1T210A	2120320
SAF20M12T200A	2120325	SAF20E12Y1T200A	2120835
SAF20M12T150A	2120330	SAF20E12Y1T150A	2120832
SAF20M12T100A	2120401	SAF20E12Y1T100A	2120369
SAF20M12T070A	2120326	SAF20E12Y1T070A	2120849
SAF20M12T050A	2122172	SAF20E12Y1T050A	2121000
SAF20M12T035A	2120281	SAF20E12Y1T035A	2122220

* Preferred models

3.3. SAF32 SAFETY AND SHUT-OFF BLOCK SIZE 32

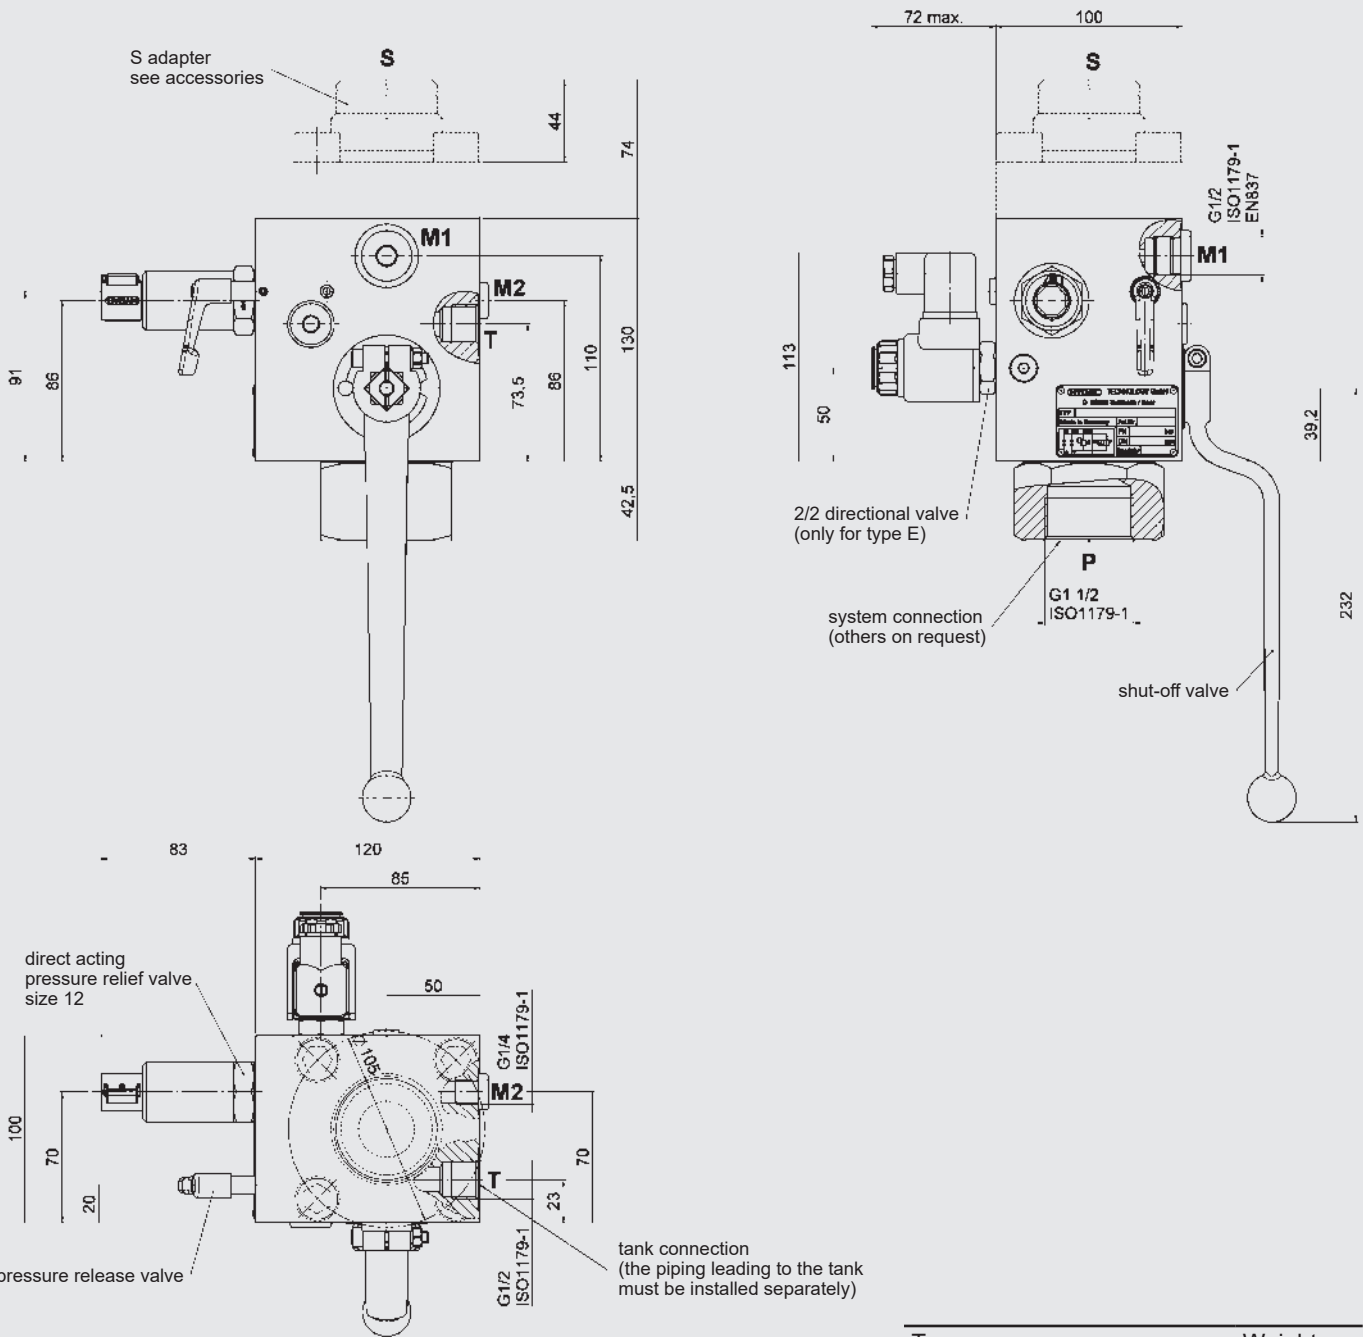


Type	Weight
SAF32M...	12.0 kg
SAF32E...	12.4 kg

SAF32 Standard types

Type	Part no.	Type	Part no.
SAF32M12T400A	2125856	SAF32E12Y1T400A	2123123
SAF32M12T350A	2122230	SAF32E12Y1T350A	3125142
SAF32M12T330A	2122231*	SAF32E12Y1T330A	2120371*
SAF32M12T315A	2121136	SAF32E12Y1T315A	2122222
SAF32M12T300A	2120837	SAF32E12Y1T300A	2120834
SAF32M12T250A	2122233	SAF32E12Y1T250A	2122223
SAF32M12T210A	2120321	SAF32E12Y1T210A	2120318
SAF32M12T200A	2121135	SAF32E12Y1T200A	2122224
SAF32M12T150A	2121134	SAF32E12Y1T150A	2122225
SAF32M12T100A	2121129	SAF32E12Y1T100A	2122226
SAF32M12T070A	2122234	SAF32E12Y1T070A	2122227
SAF32M12T050A	2121137	SAF32E12Y1T050A	2122228
SAF32M12T035A	2121125	SAF32E12Y1T035A	2122229

* Preferred models

4. SPARE PARTS


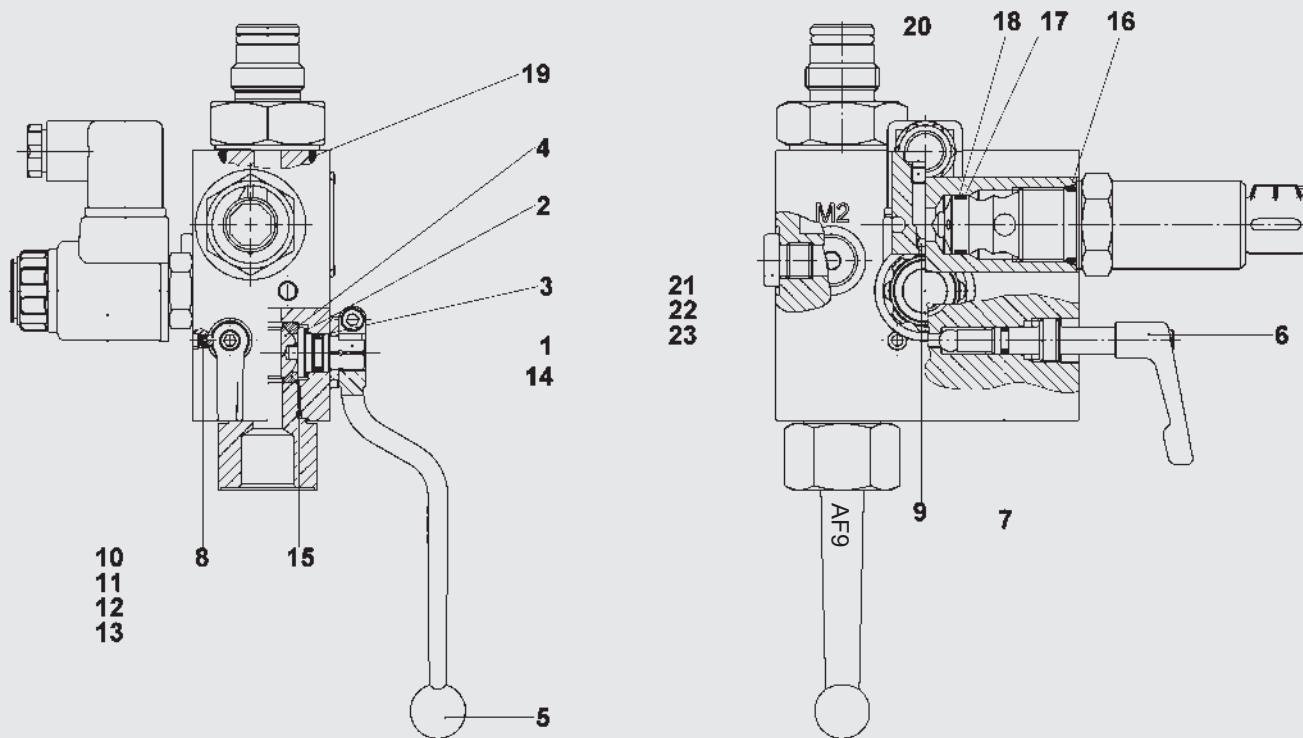


Type of safety and shut-off block	SAF10M, SAF10E	SAF20M, SAF20E	SAF32M, SAF32E
Description	Item	Dimensions or part no.	
Repair kit consisting of:	2122238 (NBR) 2122240 (FKM)	2122242 (NBR) 2122244 (FKM)	2122246 (NBR) 2122248 (FKM)
Spindle	1		
Disc	2		
O-ring	3	10x2	20x3
Ball	4		
Switching handle	5		
Spindle	6		
O-ring	7	6x2	
Threaded pin	8	M4x6	M4x10
Orifice	9	Ø1.5 mm (Q _{max} – 25.5 l/min)	
O-ring	11	17x2	
Support ring	12	11.7x15x1	
O-ring	13	11x2	
Sealing cup	14		
O-ring	15	21x2	56.7x2.8
O-ring	16	23.47x2.62	
Support ring	17	18.3x21.5x1	
O-ring	18	18x2	
O-ring	19	29.7x2.8	37.2x3
Locking screw	20	G 1/8	G 1/8
	21	G 1/4	G 1/4
	22	–	G 3/8
	23	–	G 1/2
2/2 directional valve assembly (only for E type)	10	WSM06020Y – normally open WSM06020Z – normally closed	3153871 (350 bar); 3153874 (350 bar); 3156869 (400 bar); 3156873 (400 bar)
Locking screw assembly (converts "E" type to "M" type)		277645	
Seal kit consisting of: Items 3, 7, 8, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23		2121699 (NBR) 2121701 (FKM)	2121703 (NBR) 2121705 (FKM)
Spindle repair kit consisting of: Items 6, 7, 8		2115648 (NBR) 2115649 (FKM)	



5. ADDITIONAL EQUIPMENT FOR SAFETY AND SHUT-OFF BLOCKS

In safety and shut-off blocks, the position of the shut-off valve/the pressure release valve can be secured. HYDAC supplies various additional devices for this (retrofit options, see section 8.):



Additional device L

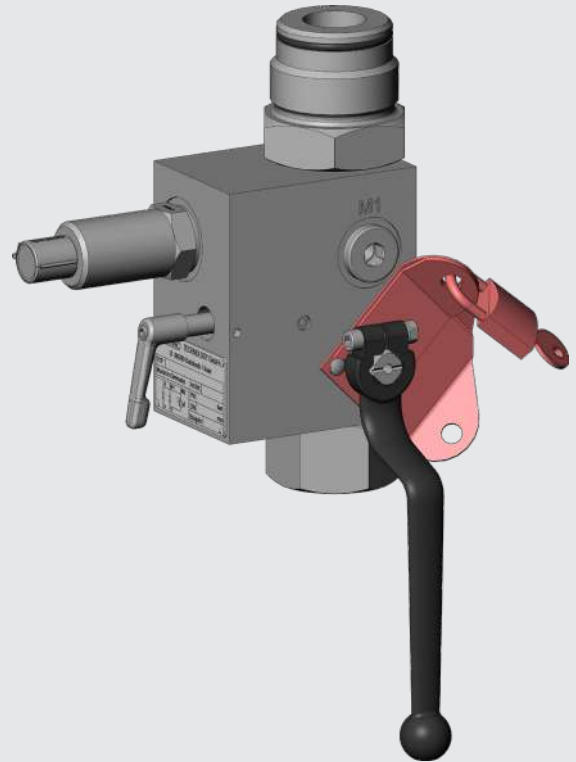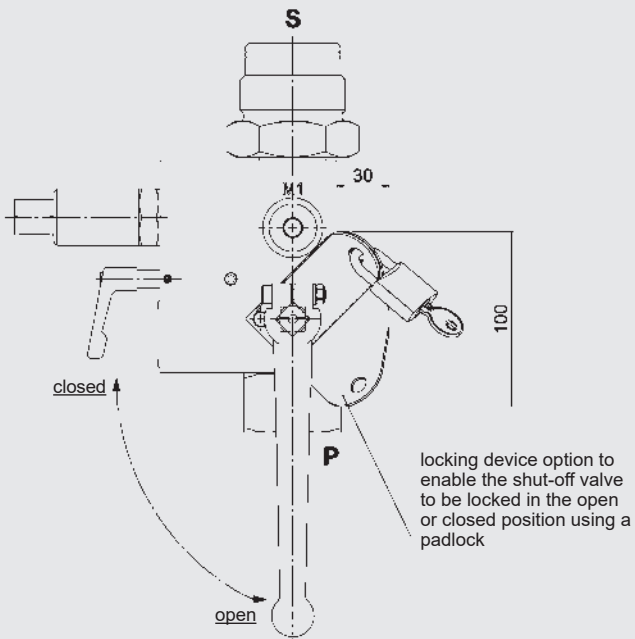



Additional device LPI

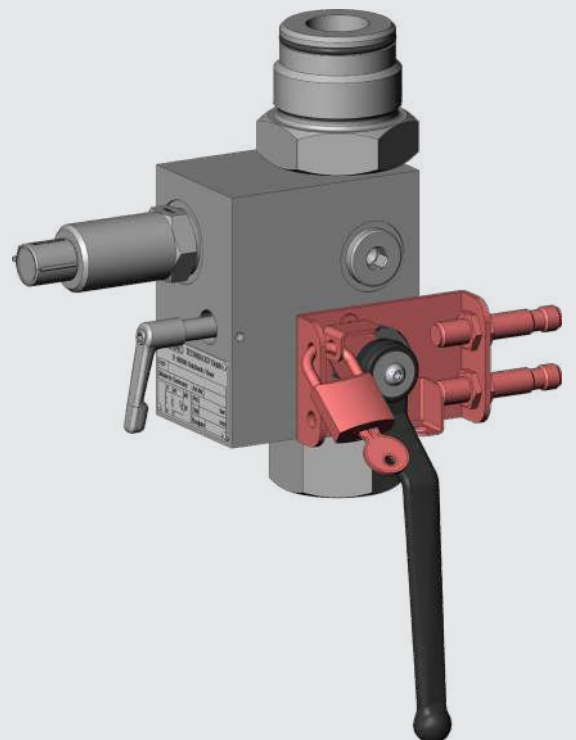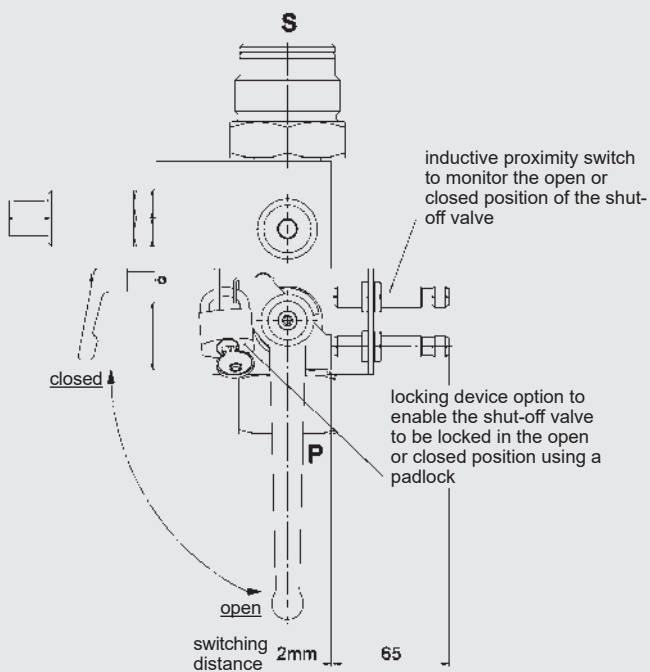

Additional device LPM

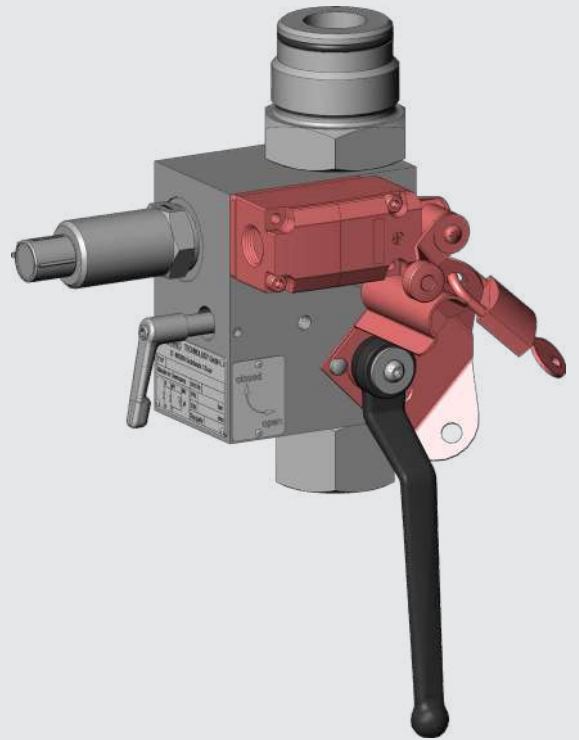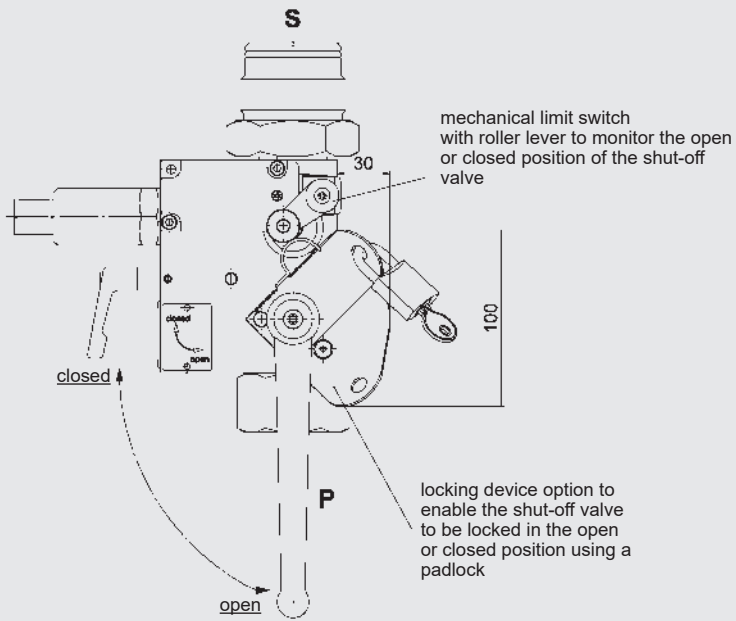




Additional device LS

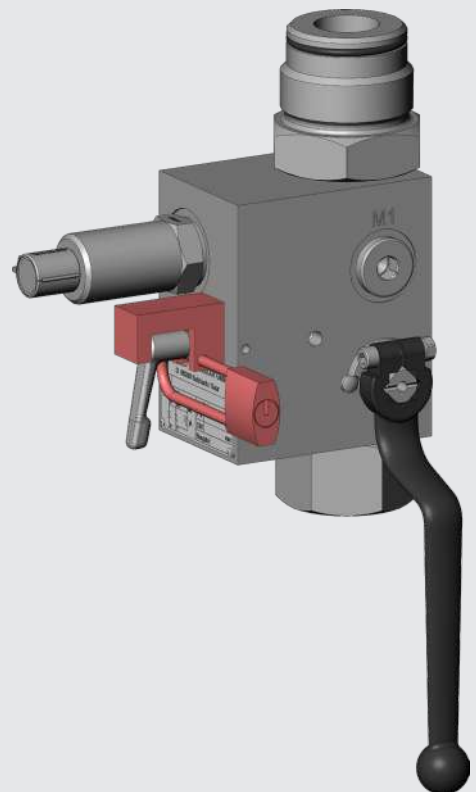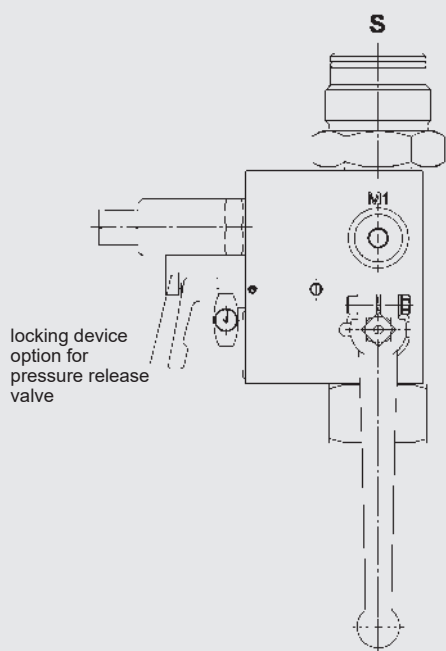


6. SPECIAL MODELS

6.1. TYPE SAF32-3M(E)


with 3 direct acting pressure relief valves size 12
(max. operating pressure 400 bar)

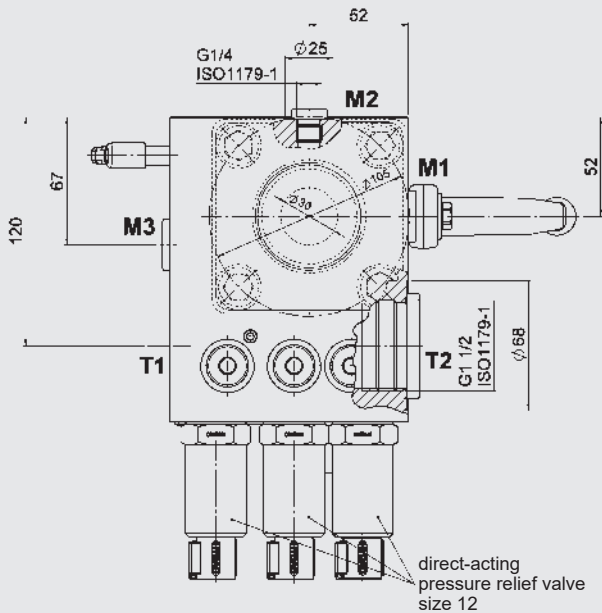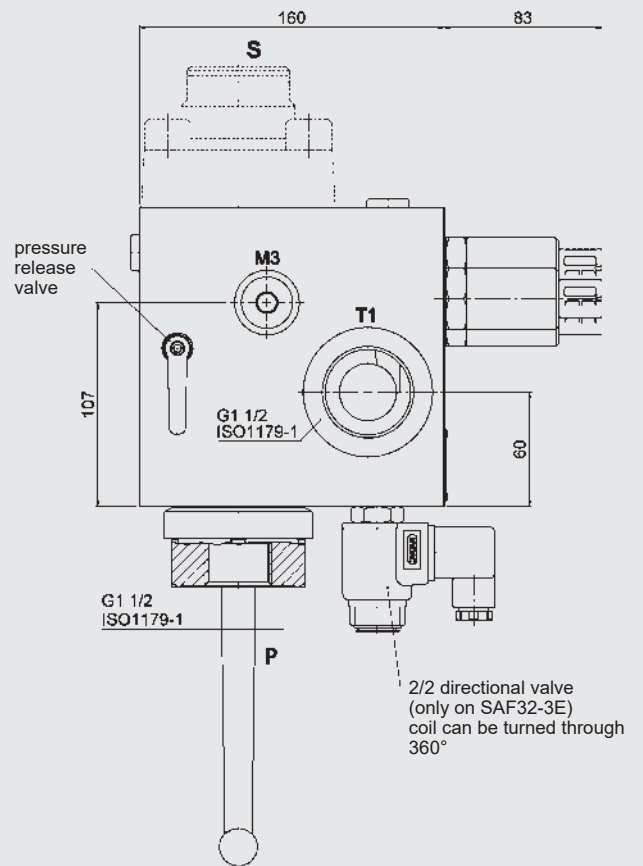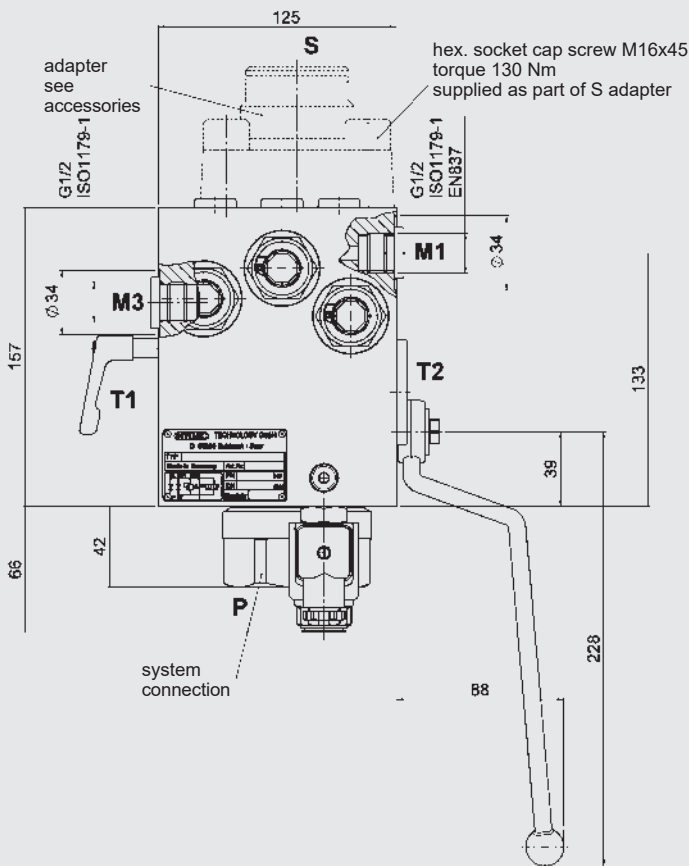

SAF32-3M

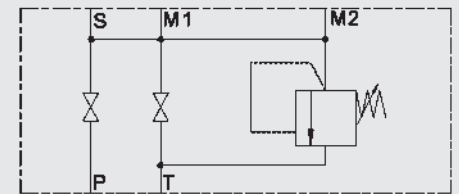

SAF32-3E

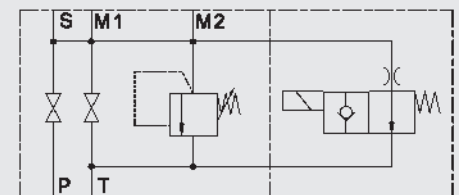

Type	Weight
SAF32-3M...	24 kg
SAF32-3E...	25 kg




6.2. TYPE SAF50M(E)

for high flow rates
with 3-direct acting pressure relief valves size 12


Max. operating pressure

Type M: 400 bar


Type E: 350 bar

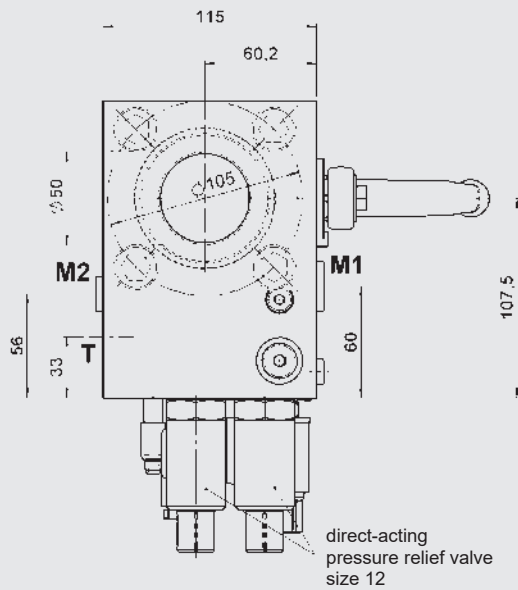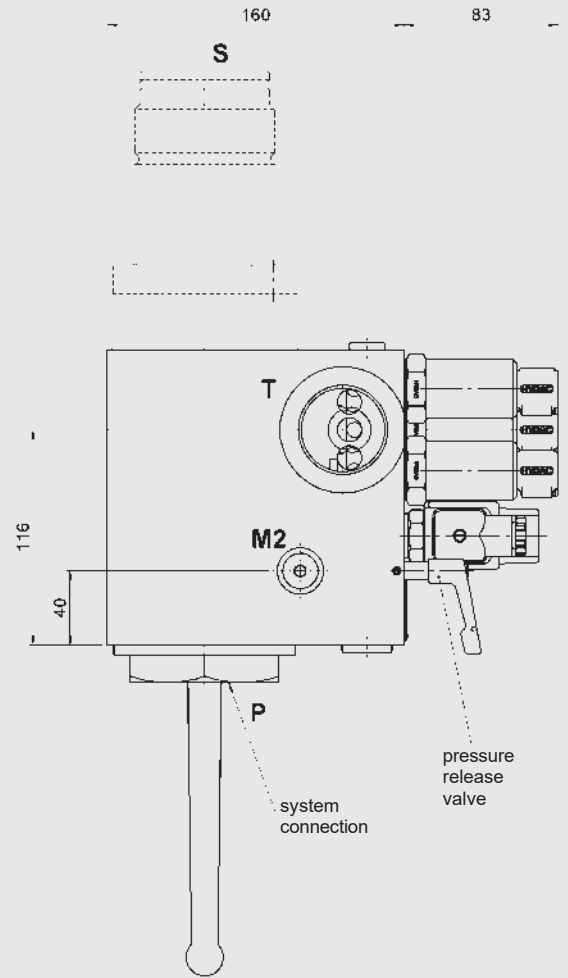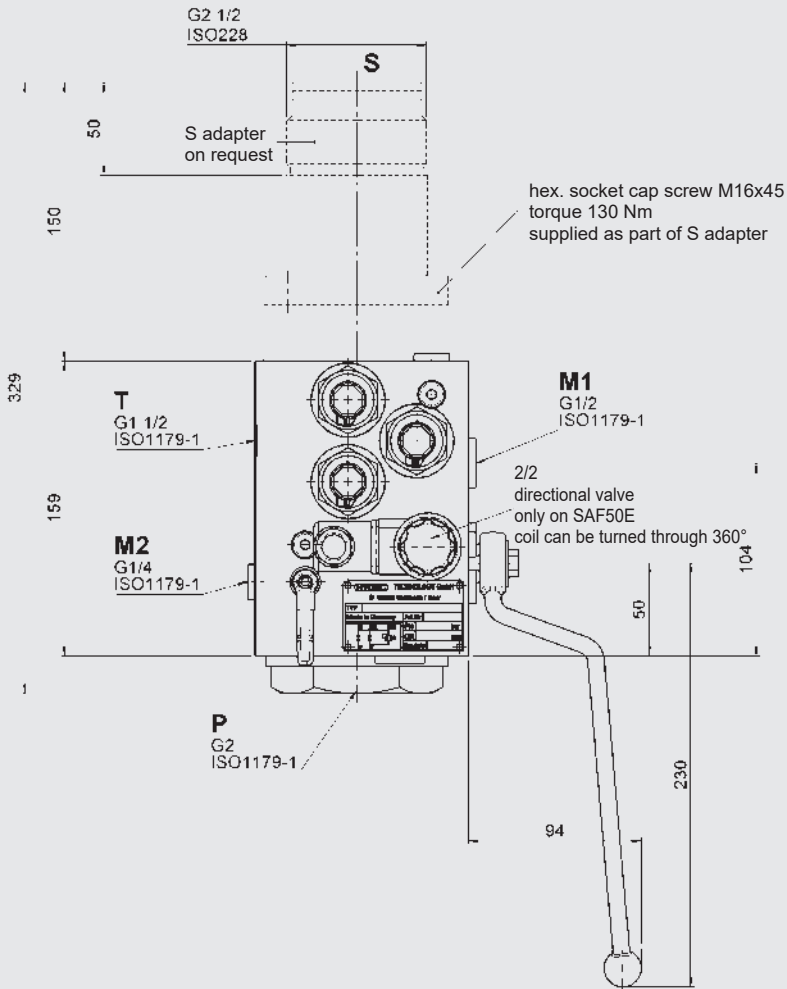

SAF50M

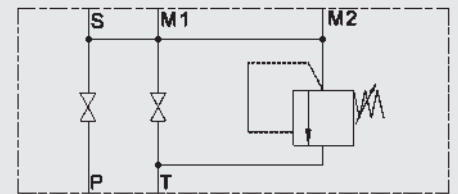



SAF50E

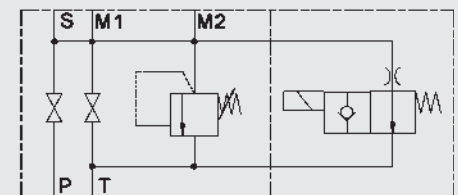


Type	Weight
SAF50M...	25 kg
SAF50E...	26 kg


6.3. TYPE SA32M(E)29

with pilot-operated pressure relief valve ($Q_{max} = 600 \text{ l/min}$)
(max. operating pressure 330 bar)

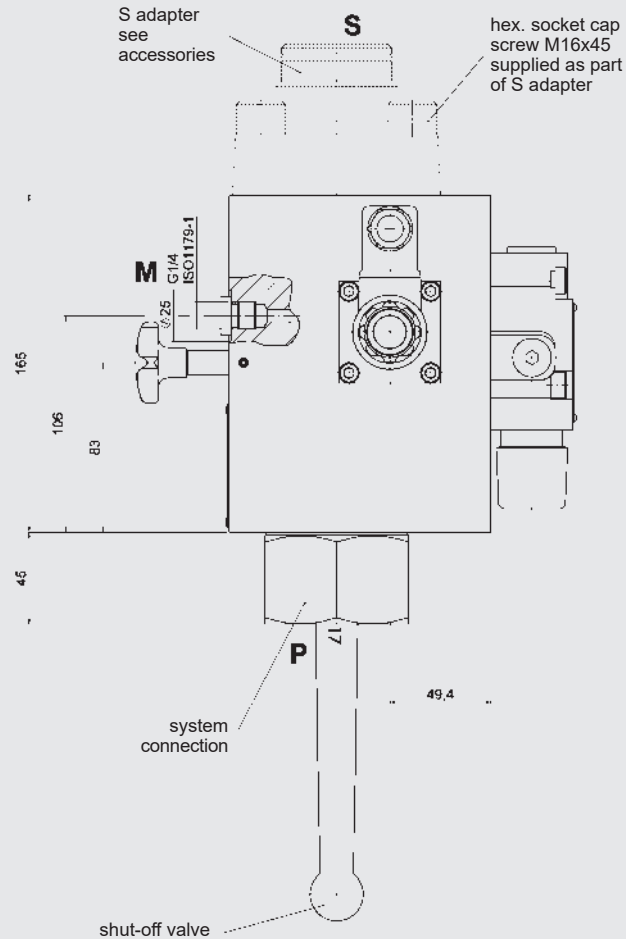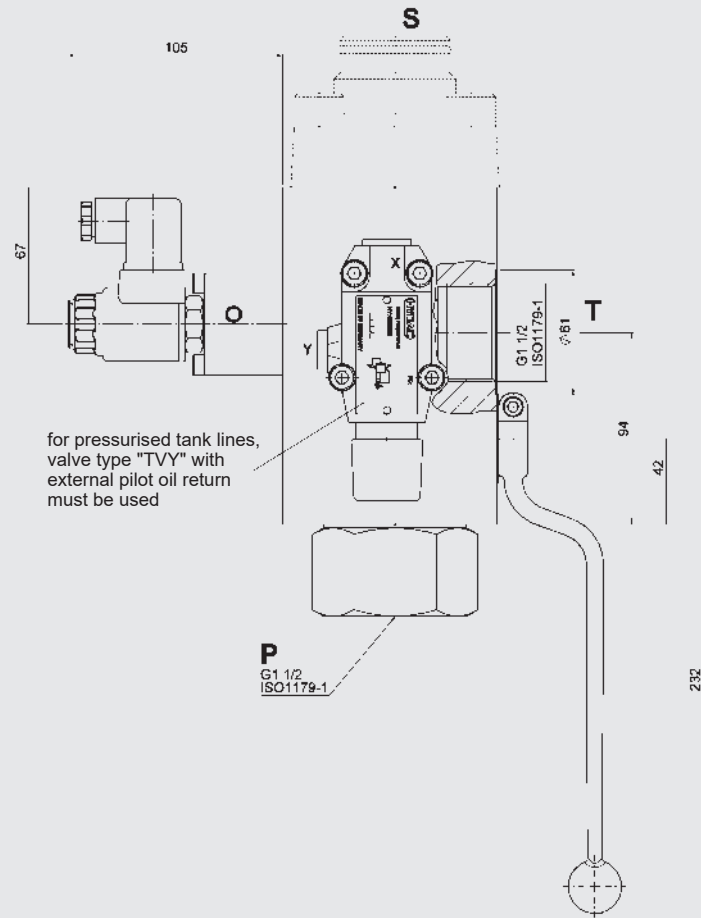


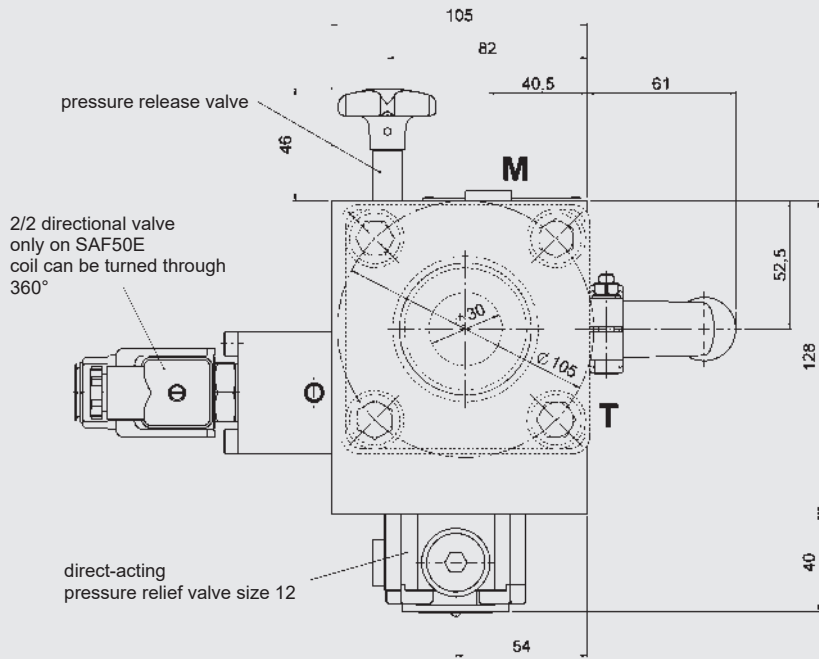


Pilot-operated pressure relief valve size 32

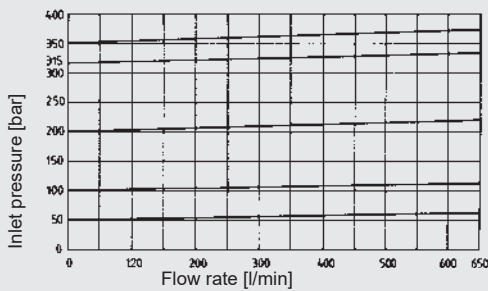

Lowest setting pressure [bar]

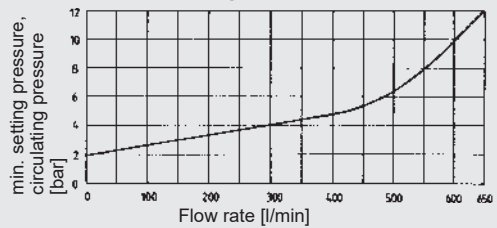


SA32E29TVY



The safety and shut-off block SA32M(E)29 is equipped with a pilot-operated pressure relief valve size 32 for high flow rates up to 600 l/min.

The E type of the safety and shut-off block has a solenoid-operated 2-way directional valve for automatic pressure release of the accumulator and the hydraulic system in an emergency or for shut-down.


SA32E29TV



For unpressurised tank lines, valve type "TV" must be used (with internal pilot oil return to tank).

For pressurised tank lines, valve type "TVY" is recommended (with external pilot oil return to tank).


SA32M29TVY



Two different models of the 2-way directional valve are available:

- WSM06020Y (normally open)
- WSM06020Z (normally closed)




SA32M29TV









Type	Weight
SA32M29...	22.5 kg
SA32E29...	23.5 kg

6.4. TYPE SAF8M

For pressures of 400 bar and above in stainless steel with high-pressure ports
(max. operating pressure 800 bar)

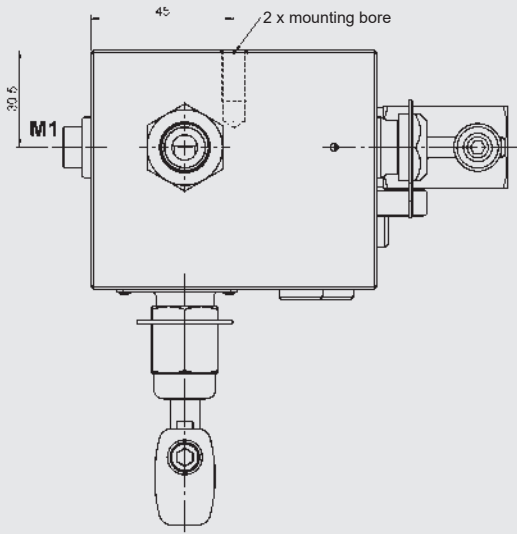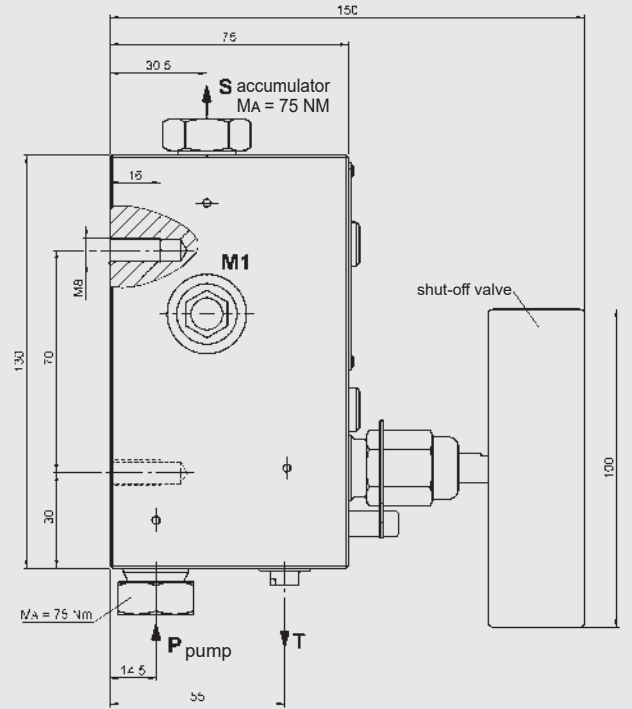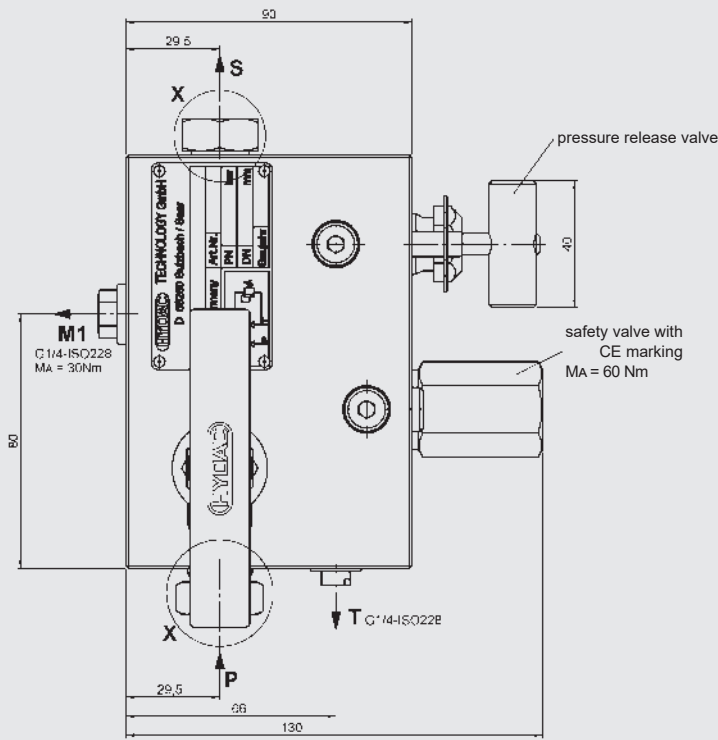

X (1:1)

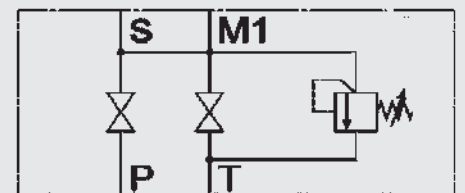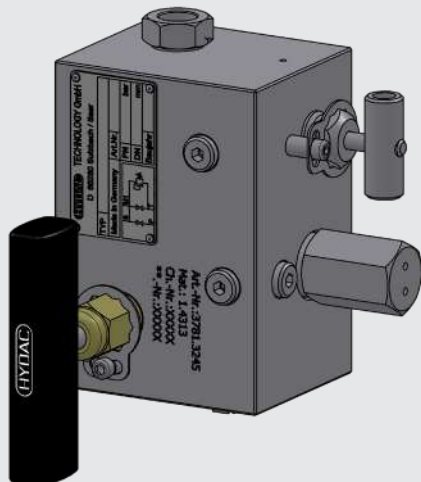

Type	Weight
SAF8M	7.5 kg

6.5. SAFETY AND SHUT-OFF BLOCK WITH 2-WAY CARTRIDGE VALVE (LOGIC ELEMENT)

This safety and shut-off block consists of a valve block, an integrated pressure relief valve and a solenoid-operated 2-way cartridge valve which replaces the main shut-off valve.

Advantages:

In addition to its compact design, this model is capable of rapid switching to control the fluid flow.

6.5.1 Function when using 4/2 directional valve


When the 4/2 directional valve is in the switching position shown (open when de-energised), the spring chamber of the logic element is pressurised via the accumulator pressure; the path from P to S is blocked and the hydraulic accumulator is automatically shut off from the system. By connecting the accumulator via the orifice in the pilot valve to the tank, it will slowly discharge.

When the 4/2 directional poppet valve is in the discharge position (energised) the spring chamber of the logic element is discharged, the path from P to S is open and the accumulator is charged.

Specifications:


Type	Nominal size	Max. operating pressure	Pressure relief valve ¹⁾
SA20A50T...	DN20	400 bar	DB12 (2)
SA32A50T...	DN30	400 bar	DB12 (3)

¹⁾ Number of pressure relief valves

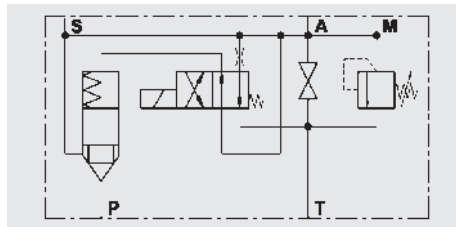

Type	Nominal size	Max. operating pressure	Pressure relief valve ¹⁾
SA20E50T...	DN20	400 bar	DB12 (2)
SA32E50T...	DN30	400 bar	DB12 (3)

¹⁾ Number of pressure relief valves

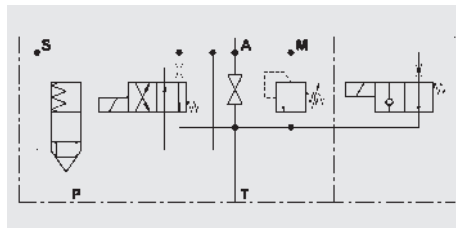

6.5.2 Function when using 3/2 directional poppet valve


When the 3/2 directional poppet valve is in the switching position shown (open when de-energised), the spring chamber of the logic element is pressurised via the system pressure; the path from P to S is blocked and the hydraulic accumulator is shut off from the system. When the 3/2 directional poppet valve is in the discharge position (energised) the spring chamber of the logic element is discharged, the path from P to S is open and the hydraulic accumulator is charged.

If the pump breaks down or if it is switched off, the 3/2 directional poppet valve reverts to the "open when de-energised" position; the accumulator pressure shuts off the logic element via the shuttle change-over valve and shuts off the hydraulic accumulator from the system.

Specifications:


Type	Nominal size	Max. operating pressure	Pressure relief valve ¹⁾
SA20A51T...	DN20	400 bar	DB12 (2)
SA32A51T...	DN30	400 bar	DB12 (3)

¹⁾ Number of pressure relief valves

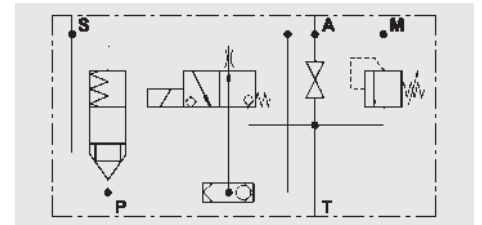

Type	Nominal size	Max. operating pressure	Pressure relief valve ¹⁾
SA20E51T...	DN20	400 bar	DB12 (2)
SA32E51T...	DN30	400 bar	DB12 (3)

¹⁾ Number of pressure relief valves

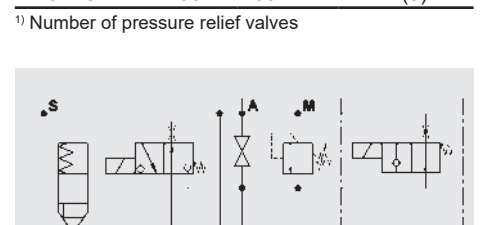

7. DESCRIPTION OF DSV10

7.1. GENERAL

DSV10 as a low cost alternative to SAF10

The three-way DSV10 safety block is used to isolate and discharge hydraulic accumulators and consumers. It complies with the relevant safety standards in accordance with DIN EN 4413 and the German Industrial Safety Regulation BetrSichV.

The HYDAC DB12 pressure relief valve is used with the DSV series. It is a direct-acting pressure relief valve in a poppet valve design with excellent opening and closing characteristics.

This version of the DB12 complies with the requirements of the European Pressure Equipment Directive (PED) with CE marking.

There are four different versions:

- DSV10M
manual discharge, standard L-ball
- DSV10M-T-ball
manual discharge, T-ball
- DSV10EY
manual/solenoid discharge, normally open
- DSV10EZ
manual/solenoid discharge, normally closed


The essential difference compared to the SAF10 lies in the shut-off and discharge function of the DSV10. On request we can supply other models to cover almost all applications, e.g. for aggressive media.

On request we can supply test certificates to EN 10204 and quality test certificates to DIN 55350, Part 18.


7.2. DESIGN

The DSV three-way safety block consists of a valve block with an integrated HYDAC pressure relief valve and the shut-off valve. It has connections for the pump, pressure gauge, tank and hydraulic accumulator. In addition, an optional solenoid-operated 2-way directional valve allows automatic discharge of the hydraulic accumulator or consumer.

Accumulator operation

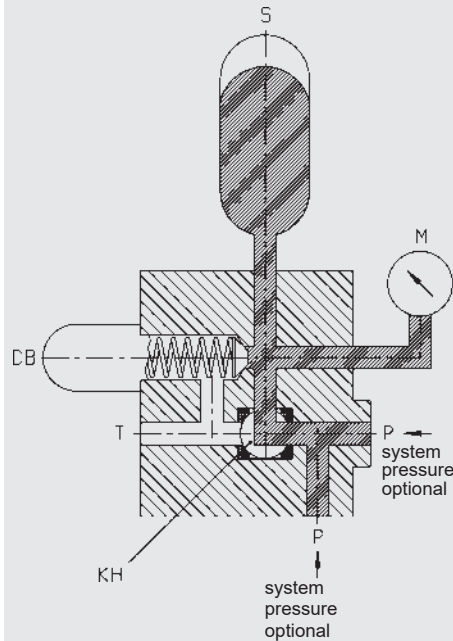

Shutting off the system pressure and simultaneously discharging the hydraulic accumulator

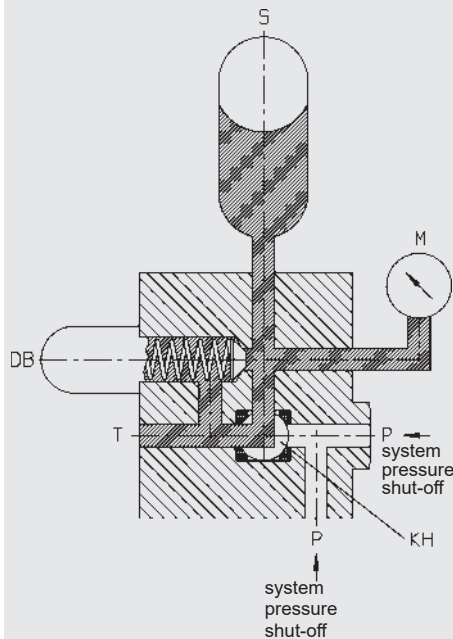

- P – Pump connection
- S – Hydraulic accumulator
- KH – Change-over ball valve
- DB – Pressure relief valve
- M – Pressure gauge connection
- T – Tank connection

The DSV10 can be used as a cost-effective alternative to the SAF10. Unlike the SAF10, the DSV10 shuts off when discharging simultaneously to the tank.

7.3. CONNECTIONS

The DSV has the following connections:

- S – Hydraulic accumulator connection (M33x2 DIN 3852 Part 3)
- P – Pipe connection (ISO 228 – G 3/8 and G 1/2)
- T – Tank connection (ISO 228 – G 1/2)
- M – Pressure gauge connection (ISO 228 – G 1/4)

7.4. FUNCTION

When the accumulator is in operation the change-over ball valve connects the pump connection with the hydraulic accumulator.

At the same time, the hydraulic accumulator is monitored for pressure via the built-in pressure relief valve.

By switching over the ball valve, the pump connection is shut off leakage-free on the inlet side and the hydraulic accumulator is discharged simultaneously to the tank.

During switching, all three ports (P, S and T) are momentarily interconnected (negative switching overlap). Automatic relief can be achieved by fitting a solenoid-operated 2/2 directional valve (e.g. in the event of a power failure or shut-down).





7.5. NOTES

Ball valves are not designed to be used as flow control valves; therefore they should always be either fully open or fully closed to avoid damaging the sealing cups.

To ensure correct functioning, pressure and temperature specifications must be observed.

7.6. SPECIFICATIONS

7.6.1 Symbols

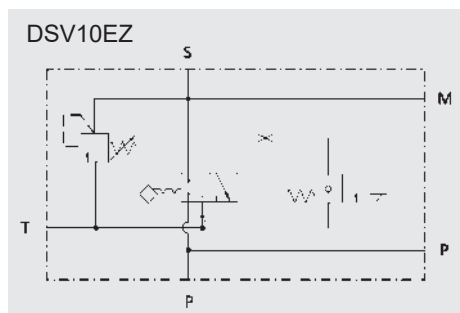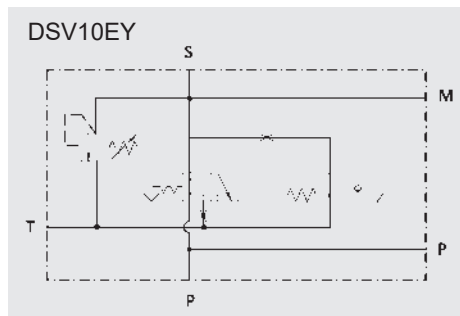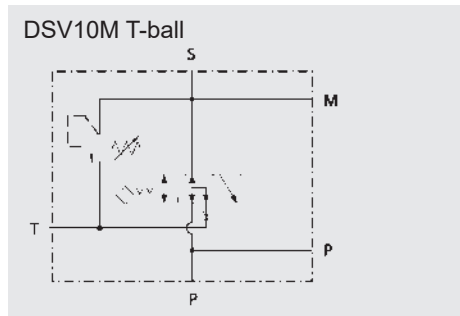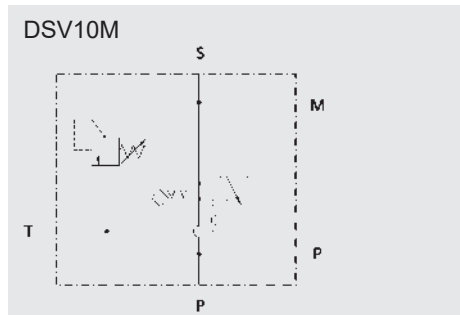

7.6.2 Design

Ball valve isolating device

Pressure relief valve is a direct-acting poppet seat valve

Poppet valve is pilot-operated

7.6.3 Materials

Housing and locking screw in steel, surface protection: phosphate-plated. Ball in steel, hard-chromed, pressure relief valve and poppet valve in high tensile steel, closing element in hardened and ground steel, wear-resistant, surface protection: phosphate-plated, ball seal in high quality synthetic material (POM), soft seals in Perbunan (NBR), cranked handle AF09 in red anodised aluminium.

7.6.4 Installation

No orientation restrictions

7.6.5 Operating fluids

Mineral oil to DIN 51524 Part 1 and Part 2 (other fluids on request)

Viscosity range:

min. 10 mm²/s
max. 380 mm²/s

Filtration:

Max. permitted contamination level of the operating fluid to ISO 4406 Class 21/19/16 or SAE AS 4059 Class 11.

We therefore recommend a filter with a minimum retention rate of $\beta_{20} \geq 100$. The fitting of filters and the regular replacement of filter elements guarantees correct operation, reduces wear and increases the service life.

7.6.6 Permitted operating temperature

-10 °C ... +80 °C

(ambient temperature for

E type limited to
-10 °C ... +60 °C)

7.6.7 Maximum operating pressure

350 bar


7.6.8 $\Delta p - Q$ characteristic curve

Measured at


$t_{oil} = 50 \text{ °C}$

$v = 30 \text{ mm}^2/\text{s}$

Flow rate from P to S

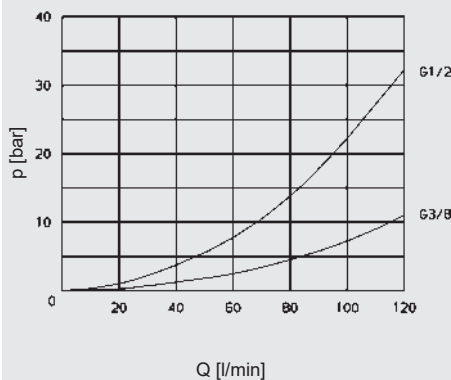

Flow rate from S to T

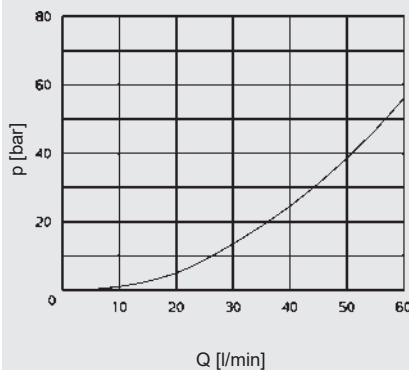

7.6.9 Model with solenoid-operated pressure release

Type

Solenoid-operated by means of pressure-tight, oil-immersed, single-stroke solenoids in accordance with VDE 0580. Actuating solenoid with male connector to DIN 43650, standard for general industrial applications, available for 24 V DC and 230 V AC.

Type of voltage

DC solenoid:

When connected to AC voltage, the necessary DC voltage is produced by means of a bridge rectifier connector.

Voltage tolerance

±15 % of the nominal voltage

Nominal current

dependent on the nominal voltage

24 V DC 0.80 A

230 V AC 0.11 A

Power consumption

$p_{20} = 18 \text{ W}$

Duty cycle

100 % (continuous operation)

Switching time

Depending on symbol, pressure across the individual ports and flow rate.

WSM06020Y:

on: 50 ms

off: 35 ms

WSM06020Z:

on: 35 ms

off: 50 ms

7.7. SPARE PARTS

Please see brochure:

- 3-way safety block DSV No. 5.251

7.8. MODEL CODE FOR DSV10

(also order example)

DSV - 10 - EY - 4 . 1 / 1 / X / T 210 - G 24 - Z4 S13

3-way safety block

Size

10

Discharge

M = manual discharge
EY = solenoid-operated and manual discharge – normally open
EZ = solenoid-operated and manual discharge – normally closed

Type of pressure relief valve

4 = DB12

With/without fitted pressure relief valve

1 = with pressure relief valve
0 = without pressure relief valve

Accumulator connection

1 = M33x2

Series

(specified by manufacturer)

Setting of pressure relief valve

T = pressure setting with TÜV
V = adjustable using tool
F = preset by manufacturer
x = model without relief valve cartridge

Opening pressure setting

e.g. 210 bar opening pressure
xxx = model without relief valve cartridge

Pressure setting range

DB12 – 150 bar
DB12 – 250 bar
DB12 – 350 bar

Type of voltage for solenoid

G = DC voltage
W = AC voltage

Nominal voltage for solenoid

24 = 24 V for type G voltage (DC)
230 = 230 V for type W voltage (AC)

Type of connection for solenoid

Z4 = connector to DIN 43650 - AF2 - PG11


Additional information

S13 = S13 adapter to hydraulic accumulator (see section 8.)

7.9. DIMENSIONS

DSV10 3-way safety block

(example: E type)

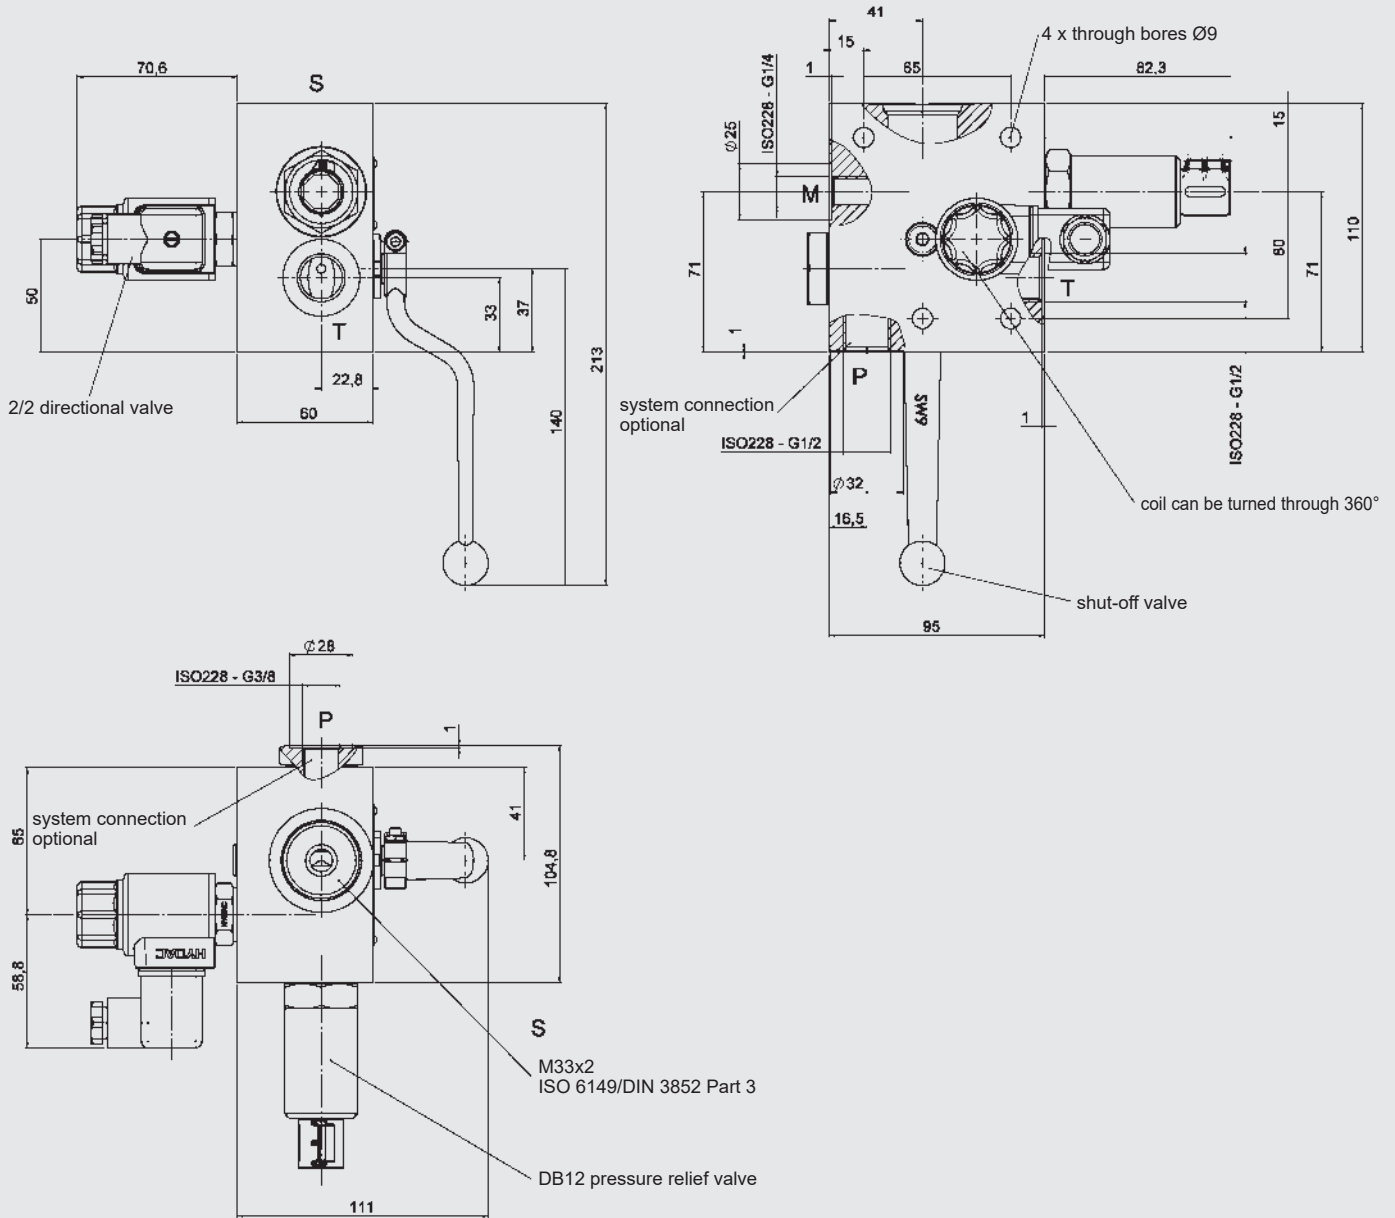


Type	Weight
DSV10M...	3.5 kg
DSV10E...	3.9 kg

SAF10 Standard types

Type	Part no.	Type	Part no.
DSV-10-M-4.0/1/X/XXXX	555999	DSV-10-EY-4.0/1/X/XXXX-G24-Z4	557367
DSV-10-M-4.1/1/X/T100	555971	DSV-10-EY-4.1/1/X/T100-G24-Z4	555983
DSV-10-M-4.1/1/X/T150	555972	DSV-10-EY-4.1/1/X/T150-G24-Z4	555984
DSV-10-M-4.1/1/X/T200	555973	DSV-10-EY-4.1/1/X/T200-G24-Z4	555985
DSV-10-M-4.1/1/X/T210	555974	DSV-10-EY-4.1/1/X/T210-G24-Z4	555986
DSV-10-M-4.1/1/X/T250	555975	DSV-10-EY-4.1/1/X/T250-G24-Z4	555987
DSV-10-M-4.1/1/X/T300	555976	DSV-10-EY-4.1/1/X/T300-G24-Z4	555988
DSV-10-M-4.1/1/X/T315	555977	DSV-10-EY-4.1/1/X/T315-G24-Z4	555989
DSV-10-M-4.1/1/X/T330	555978	DSV-10-EY-4.1/1/X/T330-G24-Z4	555990
DSV-10-M-4.1/1/X/T350	555979	DSV-10-EY-4.1/1/X/T350-G24-Z4	555991

8. ACCESSORIES

8.1. ADAPTERS FOR DIAPHRAGMACCUMULATORS



Type	Accumulator type	Volume [l]	D1 thread	Adapter	Part no. ¹⁾ NBR/carbon steel	K AF	L1 [mm]	L2 [mm]	D2 [mm]	O-ring
SAF10/20 DSV10	SBO...E-	0.075 ... 1.4	G 1/2 A	S 30	369485*	41	14	17.5	33	22x3
	SBO...A6-	0.1 ... 0.6		S 31						
	SBO...E-	2.0 ... 3.5	G 3/4 A	369486*	16		40	28x3		
	SBO...A6-	1.3 ... 4								

* Preferred models
¹⁾ Others on request

8.2. ADAPTERS FOR PISTONACCUMULATORS

8.2.1 Standard piston accumulator

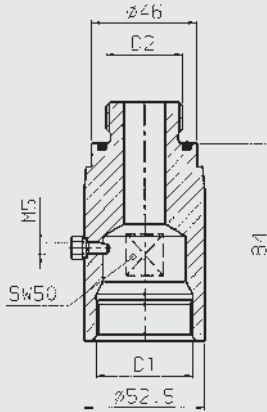


Fig. 1


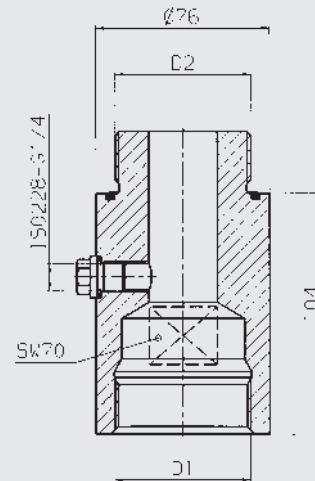


Fig. 2

Type	Accumulator type	Volume [l]	Adapter	Part no. ¹⁾ NBR/carbon steel	D1 [mm]	D2 [mm]	O-ring	Corresponding S adapter	Part no. ¹⁾ NBR/carbon steel	Fig.
SAF10/20 DSV10	SK210/350 -	2.5 ... 7.5	K 406	374929	G 1 1/4	G 1	35x3	S 12	369480	1
	SK210/350 -	10 ... 45	K 408	374931	G 2	G 1 1/2	53x3	S 13	369481	2
SAF32	SK210/350 -	50 ... 120	K 409	374933		G 2	G 2	62x3	S 309	

¹⁾ Others on request

8.2.2 SK280




Type	Accumulator type	Fluid port SK280	D1 thread	Adapter	Part no. ¹⁾ NBR/carbon steel	K AF	L1 [mm]	L2 [mm]	D2 [mm]	O-ring
SAF10/20 DSV10	SK280	AAE	G 1/2 A	S 30	369485*	41	14	17.5	33	22x3
		AAF	G 3/4 A	S 31	369486*		16		40	28x3
		AAF	G 1 A	S 32	369487	46	18	18.5	45	35x3

* Preferred models
¹⁾ Others on request

8.3. ADAPTERS FOR BLADDER ACCUMULATORS

8.3.1 Low pressure bladder accumulators

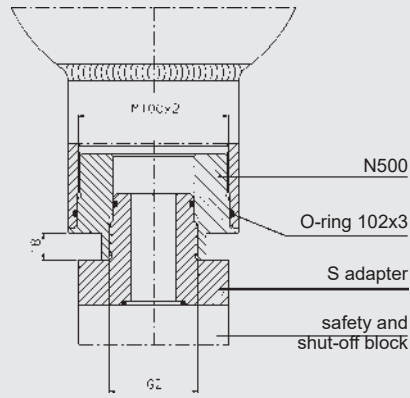

Type	Accumulator type	Volume [l]	Adapter	Part no. ¹⁾ NBR/carbon steel	Corresponding S adapter	Part no. ¹⁾ NBR/carbon steel
SAF10/20 and DSV10	SB40	2.5 ... 50	N500	367229	S 13	369481
SAF32					S 309	366715

¹⁾ Others on request

8.3.2 Standard/high pressure bladder accumulators, threaded connection




Fig. 1




Fig. 2





Fig. 3

Type	Accumulator type	Volume [l]	D1 thread	Adapter	Part no. ¹⁾ NBR/carbon steel	K AF	L1 [mm]	L2 [mm]	D2 [mm]	O-ring [mm]	Fig.
SAF10	SB330/400-	0.6 ... 1	G 3/4A	S 10	369479*	41	28	16	—	17x3	1
	SB550/690-	1 ... 5	G 1A	S 11	372750	46	34	17	—	22x3	
	SB330/400-	2.5 ... 6	G 1 1/4A	S 12	369480*		37		—	30x3	
	SB330/400/ 550/600-	10 ... 50	G 2A	S 13	369481*	65	44	21	—	48x3	
SAF20 DSV10	Connection with metric fine thread	—	M30x1.5	S 20	369482	41	15	18	40	32x2	2
		—	M40x1.5	S 21	369483	55	20	21	54	43x3	
		—	M50x1.5	S 22	369484	65			64	53x3	
SB330/400-	2.5 ... 50	G 3/4	S 367861	369489	41	18	50	—	—	3	
		G 1	S 379766	369490	46	20	55	—	—		
		G 1 1/4	S 379767	369498	65	22	60	—	—		

* Preferred models

¹⁾ Others on request

8.3.3 Standard/high pressure bladder accumulators, flange connection

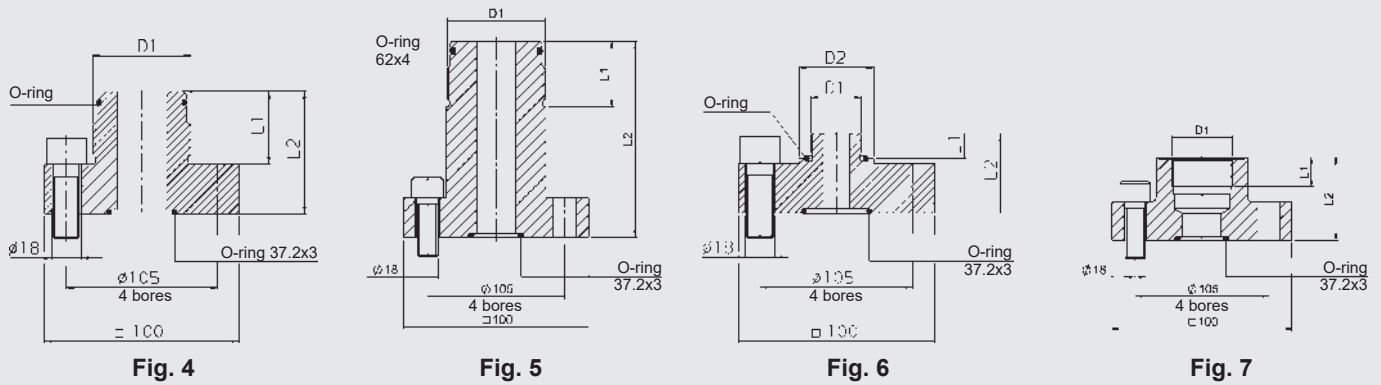


Type	Accumulator type	Volume [l]	D1 thread	Adapter	Part no. ²⁾ NBR/carbon steel	K AF	L1 [mm]	L2 [mm]	D2 [mm]	O-ring [mm]	Fig.	
SAF32	SB330/400-	0.6 ... 1	G 3/4A	S 305 ¹⁾	366723	—	28	58	—	17x3	4	
	SB550/690-	1 ... 5	G 1A	S 306 ¹⁾	2102855	—	34	64	—	22x3		
	SB330/400-	2.5 ... 6	G 1 1/4A	S 307 ¹⁾	366724	—	37	67	—	30x3		
	SB330/400/600-	10 ... 50	G 2A	S 309 ¹⁾	366715*	—	44	74	—	48x3		
	SB550-	10 ... 50		S 308 ¹⁾	376813	—	—	115	—	—		
	SB330H-	10 ... 50	G 2 1/2A	S 365922	377283	—	50	150	—	62x4	5	
	Connection with metric fine thread	—	—	M30x1.5	S 330 ¹⁾	366735	—	15	47	45	32x2	6
		—	—	M40x1.5	S 340 ¹⁾	366736	—	20	51	60	43x3	
		—	—	M50x1.5	S 350 ¹⁾	366737	—	—	—	75	53x3	
	SB330/400-	10 ... 50	—	G 1	S 365637	2106583	—	20	60	—	—	7
G 1 1/4				S 369658	2106578	—	22	—		—		
G 1 1/2				S 237838	2103869	—	24	65	—	—		

* Preferred models

¹⁾ Adapter supplied with 4 hex. socket cap screws M16x45 (part no. 6032726) torque 130 Nm

²⁾ Others on request

8.3.4 High pressure bladder accumulators

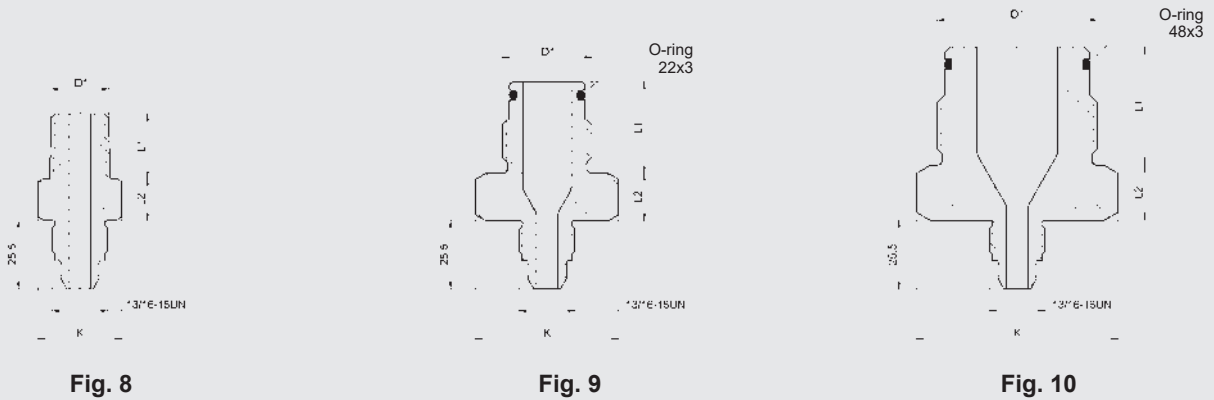


Type	Accumulator type	Volume [l]	D1 thread	Adapter	Part no. ²⁾ carbon steel	K AF	L1 [mm]	L2 [mm]	D2 [mm]	O-ring [mm]	Fig.
SAF8	SB500	≥ 10	G 2	S3961818	4158379 ¹⁾	65	44	20.5	—	48.3	10
	SB550	≤ 10	G 1	S3956412	4158378 ¹⁾	46	34	17.5	—	22.3	9
	SB690	1 ... 54	1/2" NPT	S3936571	3936571	27	27	15.5	—	—	8

¹⁾ NBR O-ring

²⁾ Others on request

8.4. GAUGE SHUT-OFF VALVE

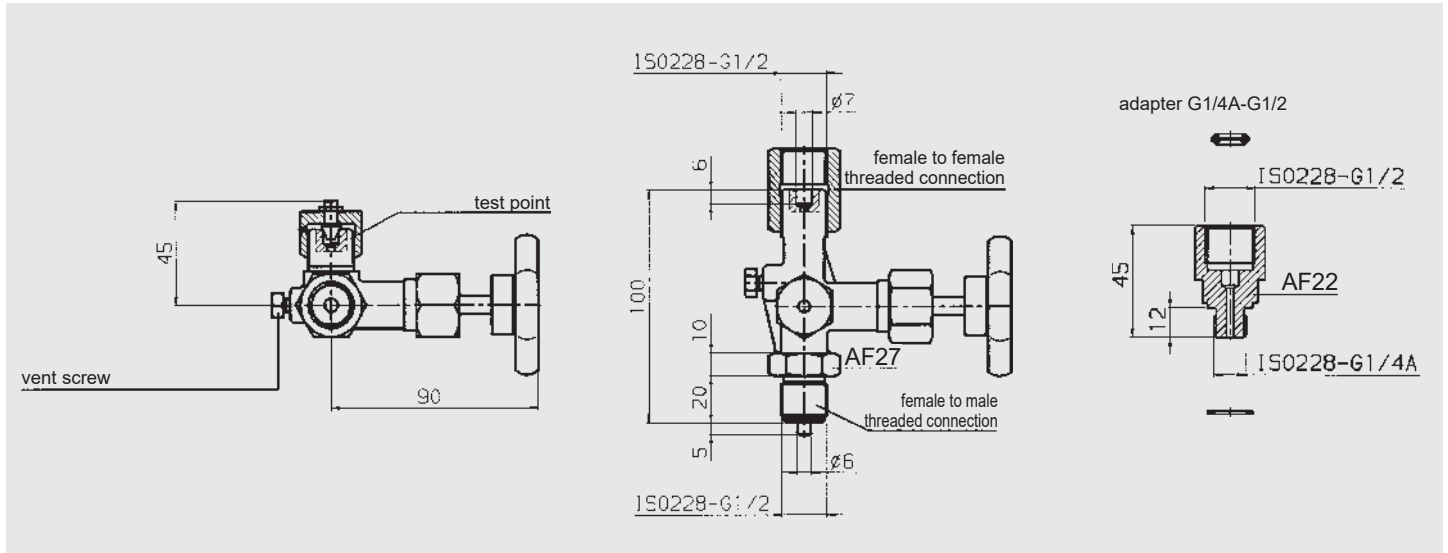

Part no.	Designation	Consisting of:
611903	Shut-off valve AG DIN 16271	<ul style="list-style-type: none"> - Pressure release valve - Female to female threaded connection - Female to male threaded connection - Test point
370754	Adapter G1/4A-G1/2	

8.5. ADDITIONAL DEVICES FOR RETROFITTING

HYDAC supplies the following additional devices for retrofitting to prevent accidental alteration of the position of the shut-off valve or the pressure release valve on the SAF block. For mounting onto the SAF, see section 5. Additional equipment for safety and shut-off blocks.

8.5.1 Lockable main shut-off valve (locking device) - L


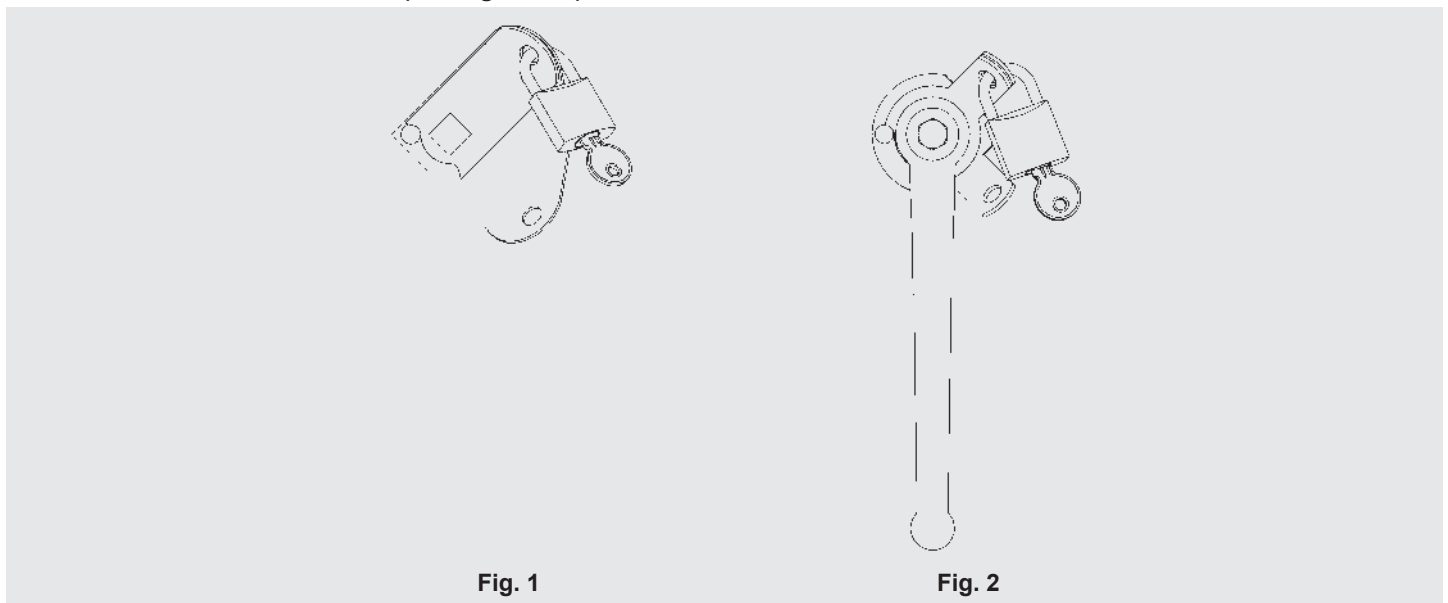


Fig. 1

Fig. 2

Part no.	Designation	Consisting of:	Fig.
4334727	Lockable main shut-off valve for SAF10	<ul style="list-style-type: none"> - Plates - Padlock 	1
4334730	Lockable main shut-off valve for SAF20	<ul style="list-style-type: none"> - Plates - Padlock 	
4334731	Lockable main shut-off valve for SAF32	<ul style="list-style-type: none"> - Plates - Padlock - Switching handle - Screw 	2

8.5.2 Lockable pressure release valve – LS

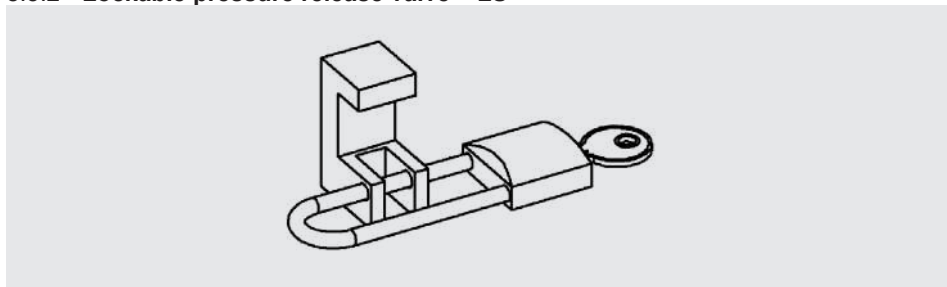

Part no.	Designation	Consisting of:
3580490	Spindle lock SAF	– Spindle lock SAF – Padlock

8.6. ACCUMULATOR CHARGING VALVE



HYDAC accumulator charging valves control the charging of the accumulator within an adjustable switching range. By combining the charging valve with an accumulator, pumps and motors on oil-hydraulic systems with fluctuating flow requirements can be sized smaller. This saves costs and energy - thus preventing unnecessary heat generation.

For further information and technical specifications, see catalogue section:

- DLHSD DLHSR Accumulator charging valve
No. 5.190.1

9. NOTE

The information in this brochure relates to the operating conditions and fields of application described.

For applications and/or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com

Safety equipment for hydraulic accumulators



1. DESCRIPTION

1.1. GENERAL

Hydraulic accumulators are pressure equipment, as defined by the European Pressure Equipment Directive (PED), and as such their manufacture is subject to the statutory regulations.

For safety in the workplace, system manufacturers and operators must draw up risk assessments for the particular site. These must take possible risks at the installation site into account as well as risks in combination with external factors.

Fundamental risks affecting hydraulic accumulators are:

- Excessive pressure
- Temperature increase (e.g. in the event of an external fire)

HYDAC provides the appropriate safety equipment to protect hydraulic accumulators from the maximum permitted operating pressure PS being exceeded on the gas and fluid side; see also catalogue section:

- HYDAC Accumulator Technology No. 3.000

When selecting safety equipment, consideration must be given to the material (elastomers and housing material) in terms of the material compatibility with the application.

The response pressure of safety equipment must **not** exceed the max. permitted operating pressure PS of a hydraulic accumulator.

1.2. NOTICE

All work with HYDAC safety devices must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The following operating instructions must be observed!

- Operating instructions GSV/GMP No. 3.504.BA
- Operating instructions GSB No. 3.505.BA

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:


- HYDAC Accumulator Technology No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

2. PROTECTION ON THE GAS SIDE

2.1. BURST DISC

2.1.1 Design

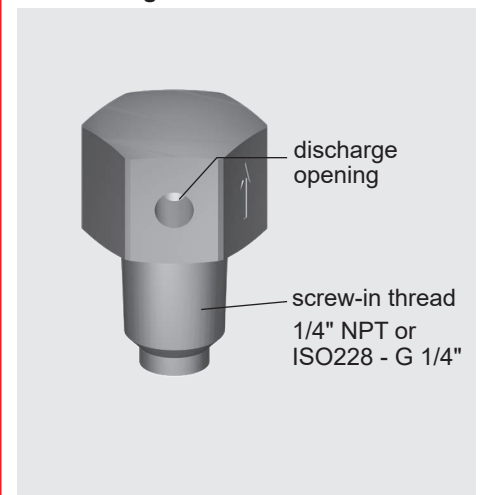

2.1.2 Function

If the pressure exceeds the permitted level, the burst disc is destroyed, permanently opening the port. This reduces the gas pressure by discharging the nitrogen completely.

Burst discs are designed for different response pressures and are supplied with a declaration of conformity.

Burst discs are made either entirely of stainless steel, or from an alloy based on stainless steel and nickel.

2.1.3 Standard types

Burst disc, welded, with declaration of conformity to PED DN5

Designation	Burst pressure ±10 % at 50 °C	Part no.
Burst disc plug 1/4" NPT	210 bar	3156148
	250 bar	3156150
	300 bar	3156151
	330 bar	3341280*
	350 bar	3156152
Burst disc plug ISO 228 G 1/4"	210 bar	3516441
	330 bar	3560189
	400 bar	3358418

* Preferred models

Others on request


Theoretically calculated values for the particular mass flow

Burst pressure [bar]	Mass flow [kg/h]
210	1950
250	2320
300	2782
330	3059
350	3244
400	3706

Burst disc, clamped, with declaration of conformity to ASME VIII, Div. 1 and VD stamp DN 15, 1/2" NPT on request

2.1.4 Adapter for bladder accumulators


To protect standard and low pressure bladder accumulators, the adapter shown below must be ordered with the burst disc:

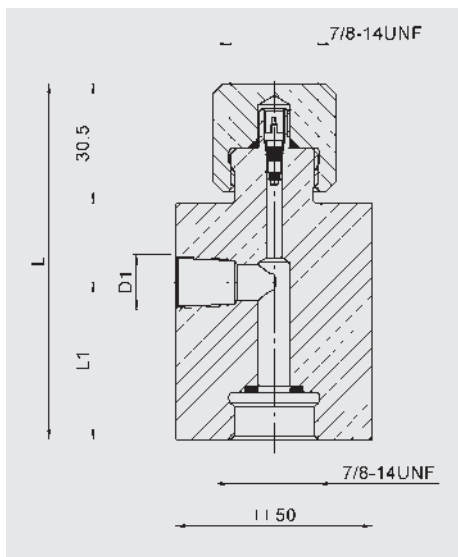

L [mm]	L1 [mm]	D1	Carbon steel	Stainless steel
90.5	40	1/4" NPT	366694	–
81.5	30	1/4" NPT	–	3117711
90.5	40	ISO 228 G 1/4"	364802	–
81.5	30	ISO 228 G 1/4"	–	3521154

2.1.5 Adapter for piston and diaphragm accumulators

To protect piston and diaphragm accumulators, the adapter shown below must be ordered with the burst disc:

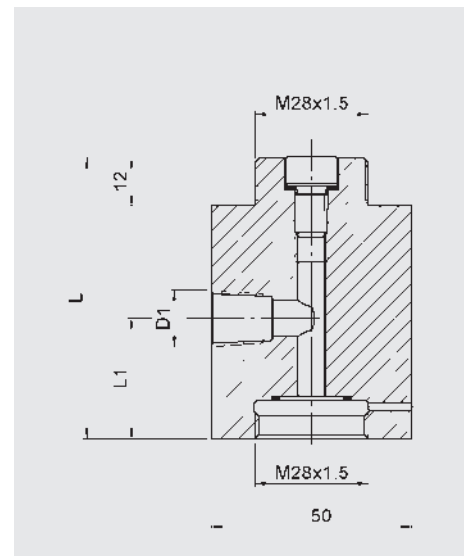

L [mm]	L1 [mm]	D1	Carbon steel	Stainless steel
70	30	1/4" NPT	3344645	–
		1/4" NPT	–	4329253
		ISO 228 G 1/4"	4286781	–
		ISO 228 G 1/4"	–	3564669



2.2. TEMPERATURE FUSE

HYDAC offers two different kinds of temperature fuse. In addition to the temperature fuse in carbon steel and stainless steel, which is suitable for bladder accumulators, HYDAC offers a type GMP6 temperature fuse, which is approved according to the European Pressure Equipment Directive (PED). It is made of stainless steel and has a CE marking.

2.2.1 Function

Temperature fuses are "devices with a safety function" and are used to release the gas pressure by discharging the nitrogen completely when an increase in temperature reaches unacceptable levels (e.g. in the case of fire).


2.2.2 Design/technical data/standard models

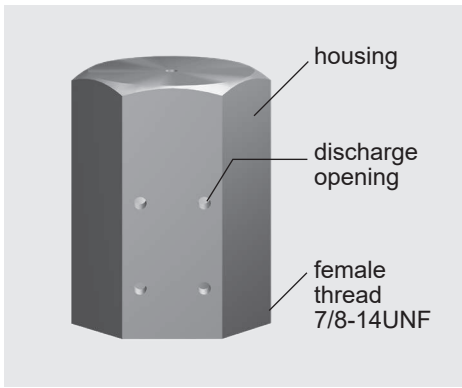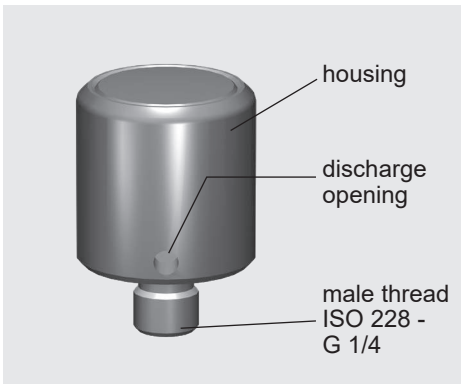Type	Temperature fuse	GMP6 temperature fuse	
Design			
Permitted operating pressure	≤ 450 bar	50 ... 420 bar	
Temperature range	-10 °C ... +80 °C	-40 °C ... +120 °C	
Melting temperature	Between +160 °C and +170 °C	Between +160 °C and +170 °C	
CE marking	Not available	Available	
Standard types	363501* Temperature fuse 7/8-14UNF 3094166* Temperature fuse 7/8-14UNF with eye bolt (for crane hook)	3517438 3521196 3584817	GMP6-10-CE1637... GMP6-10-CE1637... with adapter for bladder accumulators GMP6-10-CE1637... with adapter for piston and diaphragm accumulators

* Preferred models


2.2.3 Installation instructions

See section 1.2.

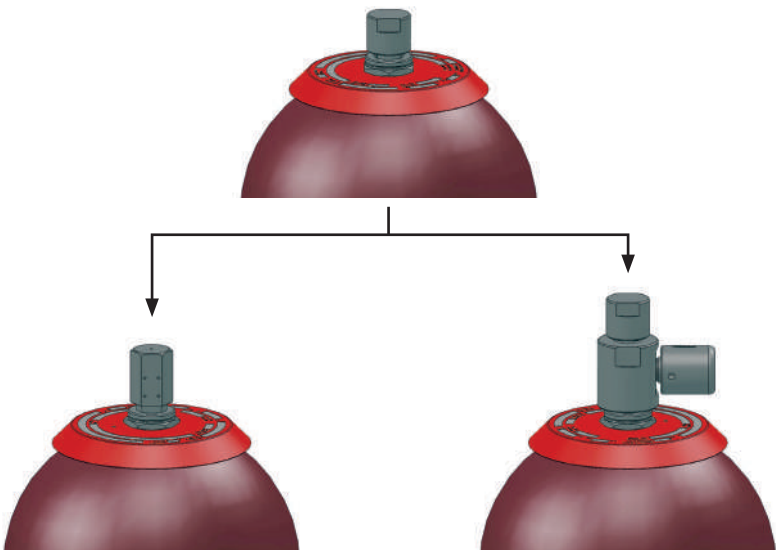Type	Temperature fuse	GMP6 temperature fuse
	Simple to retrofit (using the example of a bladder accumulator) by replacing the sealing cap with the temperature fuse.	Simple to retrofit (using the example of a bladder accumulator) by replacing the sealing cap with the GMP6 temperature fuse with adapter.
Bladder accumulator without temperature fuse		
Temperature fuse or GMP6 temperature fuse and adapter		

2.3. GAS SAFETY VALVE

2.3.1 Design and dimensions

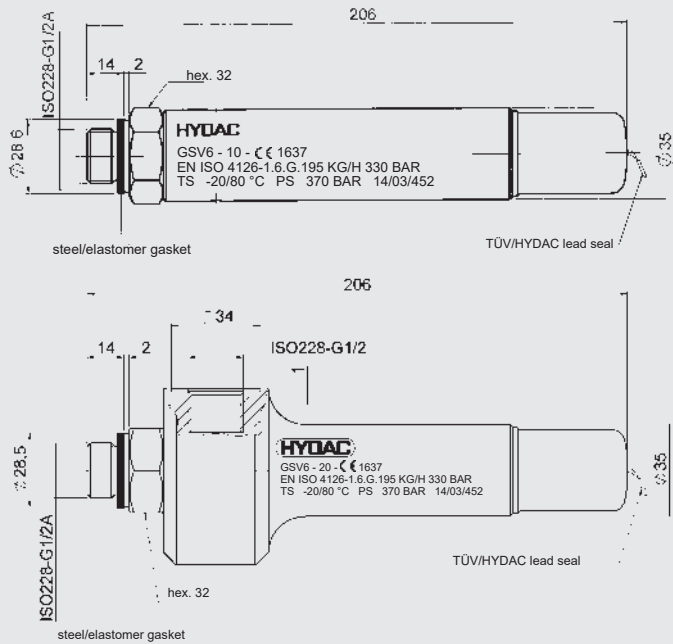

2.3.2 Function

The gas safety valve protects the hydraulic accumulator by reducing the pressure in a controlled way **if pressure exceeds the permitted level unexpectedly** (regular triggering of the GSV6 can lead to leakage at the valve). It is pre-set on the pressure side and lead-sealed by the authorised representative. It is also supplied with a declaration of conformity and a type approval.

2.3.3 Model code

(also order example)

GSV6 - 10 - CE1637.ENISO4126-1.6.G. 195. 330

Gas safety valve

Series

10 = Standard with 2 discharge openings nominal size 6 mm
20 = 1 discharge opening ISO 228 - G 1/2

Component code

Outlet mass flow Q_m [kg/h]

(see table, section 2.3.6)

Response pressure p [bar]

(see table, section 2.3.6)

2.3.4 Technical Data

Dimensioning

European Pressure Equipment Directive (PED), EN ISO4126-1, EN 764-7, others on request

Module category

IV to European Pressure Equipment Directive (PED)
Module B + D (EU-type examination)
Module G (unit verification) on request

Nominal size

6 mm

Outlet mass flow

See section 2.3.6

Material

Stainless steel, closing element with flexible seat seal

Medium

Nitrogen (N₂)

Operating pressure range

30 ... 370 bar

Temperature range

-20 °C ... +80 °C

Others on request

Weight

1.1 kg

2.3.5 Installing the GSV gas safety valve

The self-centring steel-elastomer seal ring means that this valve can be installed simply and securely in any position.

See section 1.2.

2.3.6 Standard types

Selection of the response pressure (p) of the gas safety valve is based on the maximum operating pressure of the hydraulic accumulator, according to the application.


Q _m [kg/h]	p [bar]	Part no. ¹⁾
15	30	3123965
20	40	3123966
28	50	3123967
35	60	3124028
40	70	3124029
45	80	3124030
50	90	3124031
58	100	3124032
65	110	3124033
70	120	3124034
75	130	3124035
83	140	3124036
88	150	3124037
95	160	3124038
100	170	3124039
105	180	3124040
110	190	3124041
118	200	3124042
125	210	3124043
130	220	3124044
135	230	3124045
140	240	3124046
148	250	3124047
155	260	3124048
160	270	3124049
165	280	3124050
170	290	3124051
178	300	3124052
185	310	3124053
190	320	3124054
195	330	3124055
200	340	3124056
205	350	3124057

¹⁾ Others on request

> 350 bar = additional price required for unit verification, please ask

2.3.7 Adapter for bladder accumulators

To protect standard and low pressure bladder accumulators, the adapter shown below must be ordered with the GSV6 gas safety valve.

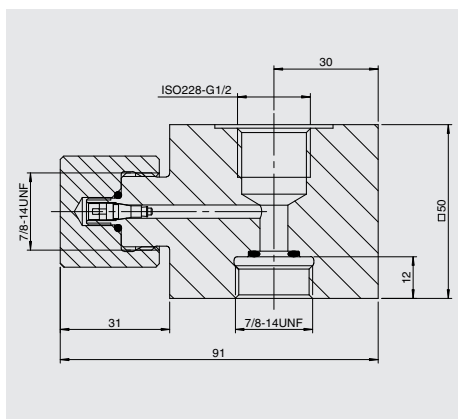


Designation	Part no.
Adapter assembly for bladder accumulators	2103381

Others on request

2.3.8 Adapter for piston and diaphragm accumulators

To protect piston and diaphragm accumulators, the adapter shown below must be ordered with the GSV6 gas safety valve:

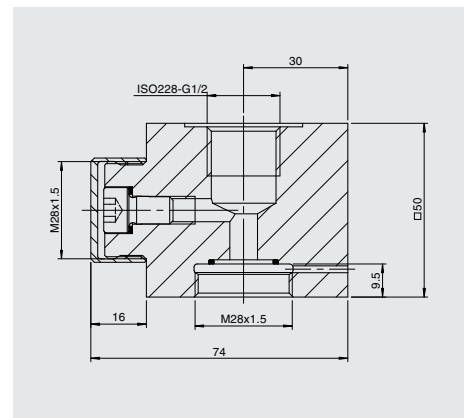


Designation	Part no.
Adapter assembly for piston and diaphragm accumulators	3423339

Others on request

2.4. GAS SAFETY BLOCK

2.4.1 Design

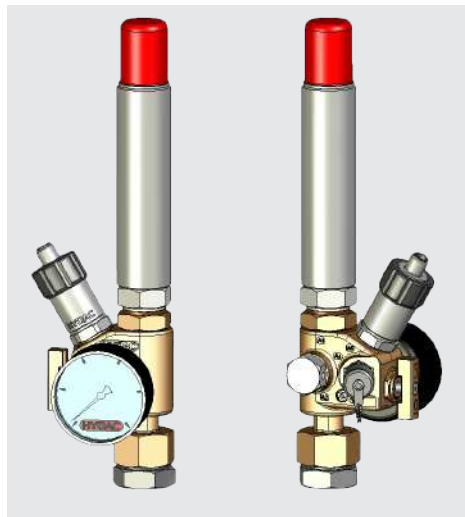

The GSB450 gas safety block consists of a brass block (other materials on request) with an integrated vent valve and shut-off valve and connections for:

- Pressure gauge
- Gas safety valve (GSV6)
- Gas charging valve (e.g. Minimess)
- Pressure transmitter or pressure switch
- Burst disc or temperature fuse

The gas safety valve connection is designed as a check valve. Therefore, the valve can be changed even if the system is pressurised.

2.4.2 Function

The GSB450 is an adapter block which is mounted on a hydraulic accumulator on the gas side and which can be fitted with various pressure devices, charging equipment, safety valves and other safety components.

2.4.3 Advantages

- Compact design
- Flexible connection options
- Variable indication options: bar, MPa or psi, analogue or digital (optional)
- The direction that the pressure indicator is facing can be individually adjusted
- Accumulator can be charged with nitrogen, directly via Minimess valve
- Pre-charge pressure can be checked without FPU-1

2.4.4 Model code (also order example)

GSB450 - 1 - 1 - 5 - 1 - 1 - 350

Series

Material

- 1 = standard
(brass and add-on parts in carbon steel)
- 2 = stainless steel
(brass and add-on parts in stainless steel)
- 3 = stainless steel
(on request)

Accumulator connection

- 1 = connection for SK/SBO
- 2 = connection for SB 7/8-14UNF
- 3 = connection for SB 5/8-18UNF
- 8 = connection for threaded pipe fitting DKS18
- 9 = special connection (on request)

Pressure gauge display

- 0 = none
- 1 = 0 - 25 bar
- 2 = 0 - 100 bar
- 3 = 0 - 160 bar
- 4 = 0 - 250 bar
- 5 = 0 - 400 bar
- 9 = special pressure gauge

Gas charging connection

- 0 = none
- 1 = Minimess valve M16x2 (NBR seal)
- 2 = Minimess valve M16x1.5 (FKM seal)
- 3 = Minimess valve M16x1.5 (gas-tight, stainless steel 1.4104)
for permanent monitoring (see section 2.4.6)
- 9 = special connection

Safety devices

- 0 = none
- 1 = GSV
- 2 = burst disc
- 3 = temperature fuse

Pressure range of the safety equipment

2.4.5 Technical Data

Medium

Nitrogen (N₂)

Permitted operating temperature

-20 °C ... +80 °C

Max. operating pressure

400 bar / 5800 psi

Accumulator connection

Bladder accumulator:
7/8-14UNF with adapter

For bladder accumulators, the appropriate adapter is supplied. All other connections are sealed with locking screws.


Piston and diaphragm accumulators:
M28x1.5

For piston and diaphragm accumulators the connection is a lock nut with M28x1.5 thread as standard.

Weight

- Standard design for SB
1.6 kg
- Standard design for SBO and SK
1.5 kg

2.4.6 Dimensions and versions

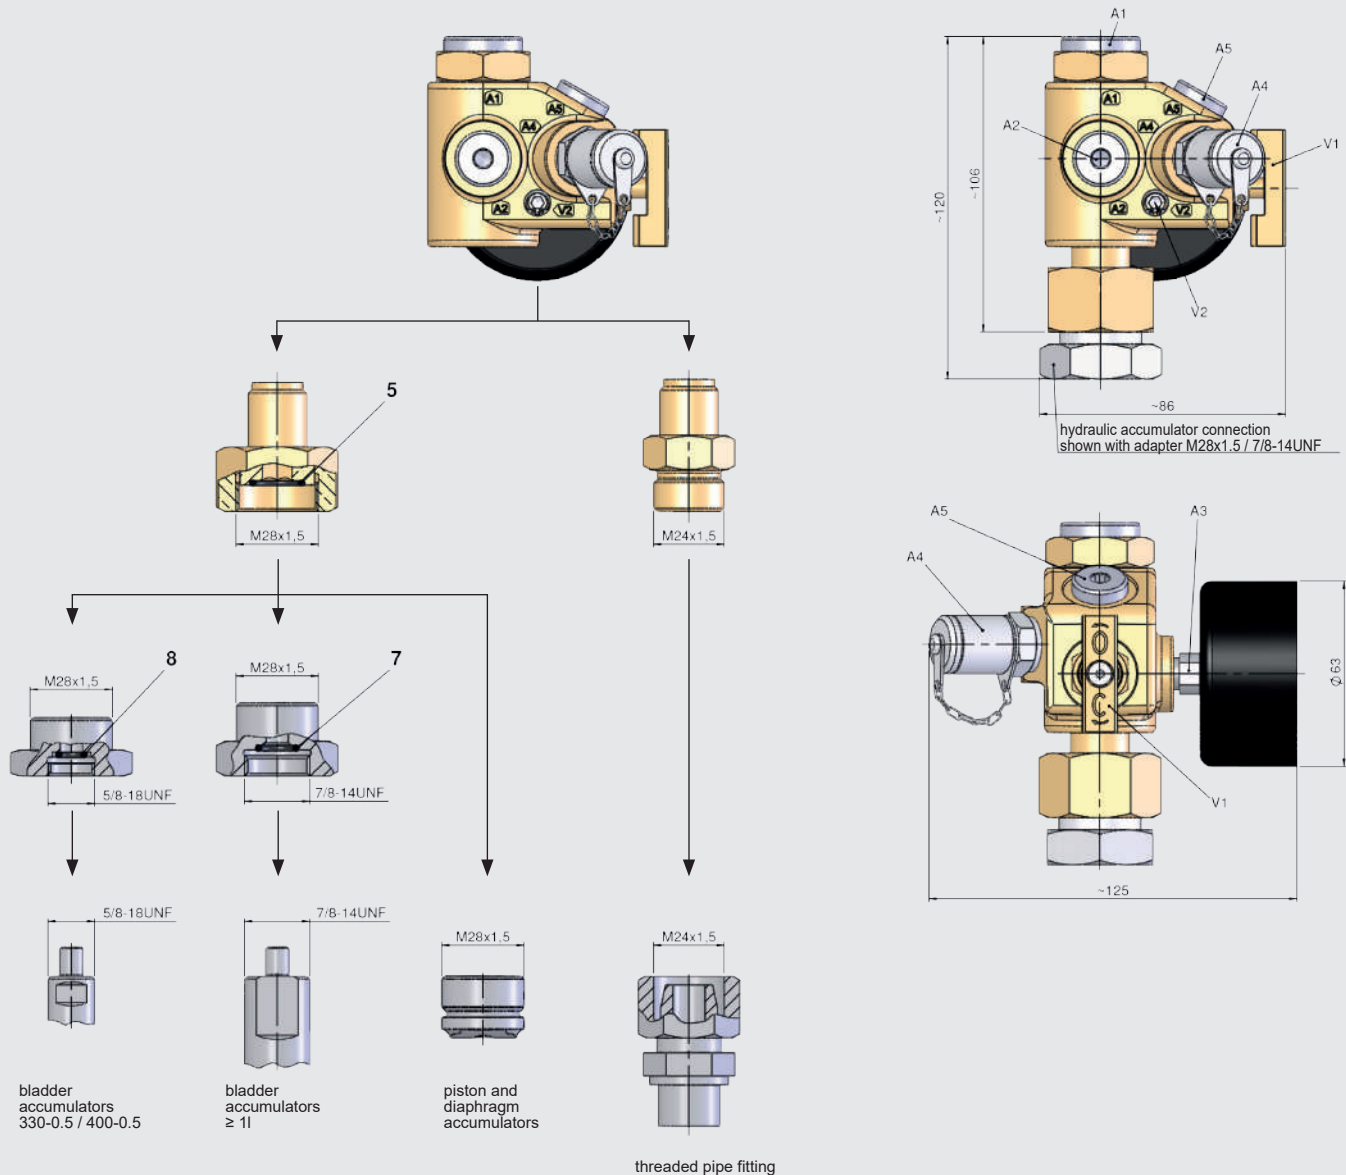

Standard model

The GSB450 is delivered with the following as standard:

- Shut-off valve
- Release valve
- Pressure gauge (0–400 bar, Ø 63 mm)
- Gas charging connection, code 1 (Minimes threaded coupling, series 1620, M16x2)

The shut-off valve (V1) must always be closed following the charging and testing procedure to protect the pressure gauge (A3), Minimes valve (A4) and pressure switch/pressure transmitter (A5) from a permanent pressure load. The pressure side must be depressurised at the release valve (V2).

If a pressure switch/pressure transmitter for permanent monitoring of the accumulator pre-charge pressure is screwed in at connection A5, the shut-off valve (V1) must be open. We recommend the gas charging connection with code 3 for this – see also Options.

Options

The GSB450 can be supplied with the following options*:

- Special pressure gauge, e.g.
 - units other than bar/psi
 - glycerin-filled
- Minimes gas charging valve with code 3 for permanent monitoring (series 1615, M16x1.5, stainless steel version)
- Version where all steel parts are stainless steel (A4)
- Safety devices (GSV6 gas safety valve, burst disc, temperature fuse)

* On request and must be ordered separately and at additional cost

2.4.7 Standard types

Designation	Part no.
GSB450-1-1-1-1-0	3534710
GSB450-1-1-2-1-0	3534711
GSB450-1-1-3-1-0	3534712
GSB450-1-1-4-1-0	3528946
GSB450-1-1-5-1-0	3426882
GSB450-1-2-1-1-0	3534713
GSB450-1-2-2-1-0	3534714
GSB450-1-2-3-1-0	3484861
GSB450-1-2-4-1-0	3433824
GSB450-1-2-5-1-0	3426905

2.4.8 Installation of GSB gas safety block

See section 1.2.

2.4.9 Accessories

Block connections

Ports	Size	Standard configuration	Optional configuration
A1	ISO 228 - G1/2	Blanking plug	GSV6 gas safety valve
A2	ISO 228 - G1/4	Blanking plug	<ul style="list-style-type: none"> ● Remote charging (added by the customer) ● Burst disc ● Temperature fuse
A3		Pressure gauge 0–400 bar	<ul style="list-style-type: none"> ● For other measuring ranges, see section 2.4.4 ● Special pressure gauge (please specify)
A4		Minimes valve M16x2	Minimes valve M16x1.5 (various versions possible, please request, see section 2.4.4)
A5		Blanking plug	Pressure transmitter e.g. HYDAC HDA, EDS


Valves

Type	Description
V1	Shut-off valve
V2	Release valve (int. hex. AF 4)

Charging hoses

Charging hoses are designed for the particular maximum permitted operating pressure marked on them and 10,000 charging processes.


(HYDAC charging hoses comply with DIN EN ISO 4413 and DIN EN 853 to 857)

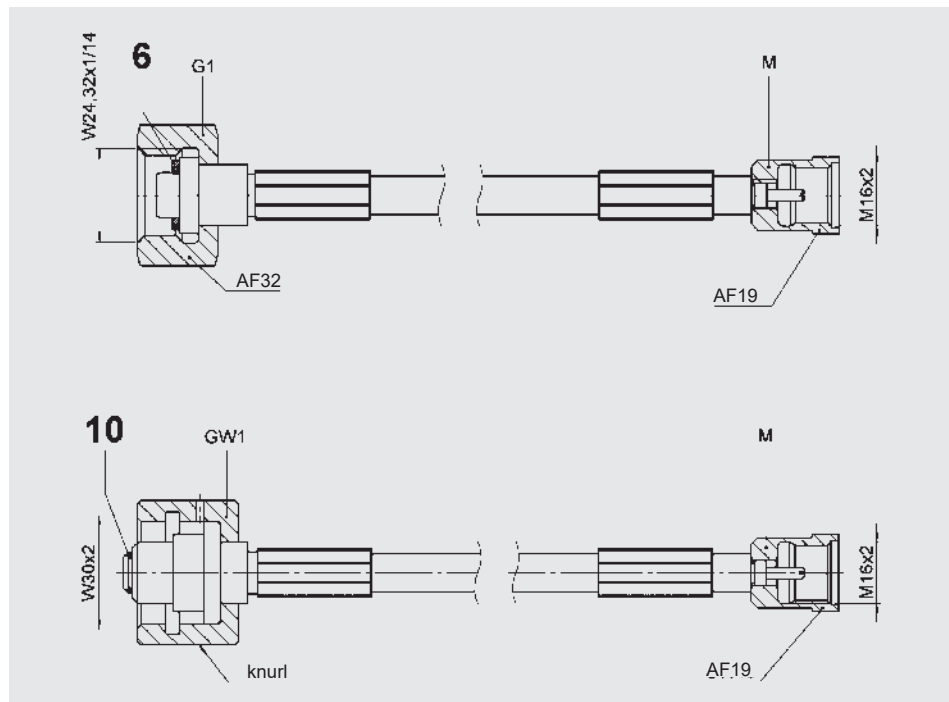

Gas connection of nitrogen bottles	Minimes connection	Length [m]	Part no.
W30x2	M16x2	2.5	3434454
		4	3434457
W24.32x1/14	M16x2	2.5	3434424
		4	3434451
		10	3526858

Suitable adapters for foreign nitrogen bottles can be found in the following catalogue section:


- FPU charging and testing unit No. 3.501

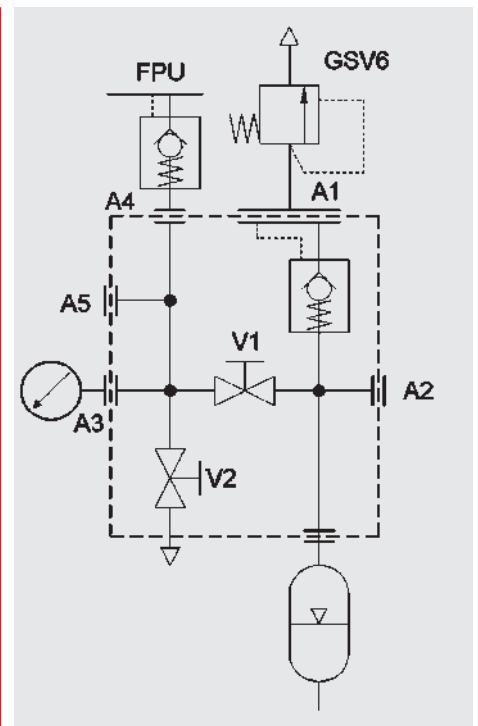

2.4.10 Spare parts

The following spare parts for GSB450 relate to the standard version:

carbon steel/NBR

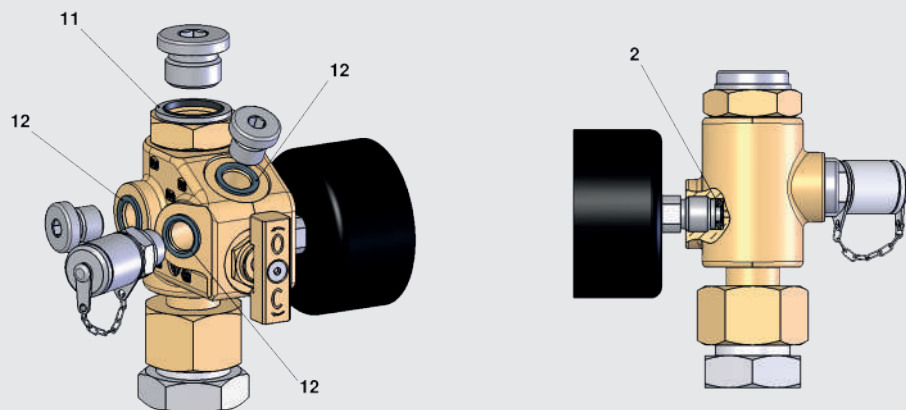

Description	Quantity	Item	Part no.
Seal kit for GSB450 consisting of:	1	–	4024196
Rhombic seal 1/4"	1	2	–
O-ring 15x2	1	5	–
Seal ring	1	6	–
O-ring 11x2	1	7	–
O-ring 9x2	1	8	–
O-ring 5.7x1.9	1	10	–
Seal ring	1	11	–
Seal ring	3	12	–
Pressure gauge	1	3	0 - 10 bar 635139
0 - 25 bar			635140
0 - 100 bar			635141
0 - 250 bar			635142
0 - 400 bar			635143

3. PROTECTION ON THE FLUID SIDE


3.1. GENERAL

The fluid side must be protected from pressures exceeding the permitted operating pressures by installing approved and appropriate safety valves.

HYDAC offers pressure relief valves (DB12) which have a response pressure of up to 400 bar (set by HYDAC). The valve bears the CE marking, is built into safety and shut-off blocks in the series DSV10 and SAF in nominal sizes DN10 to DN50 and is lead-sealed.

Further information is available from the following catalogue section:

- SAF/DSV Safety and Shut-off Block No. 3.551



4. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH

Industriegebiet

66280 Sulzbach/Saar, Germany

Tel.: +49 (0) 68 97 / 509 - 01

Fax: +49 (0) 68 97 / 509 - 464

Internet: www.hydac.com

E-mail: speichertechnik@hydac.com

Mounting elements for hydraulic accumulators



1. DESCRIPTION

1.1. GENERAL

HYDAC mounting elements enable simple and secure mounting of all hydraulic accumulators. In addition to the standard product range described below, mounting technology for specific customer requirements and applications is available on request. For further information and notes, see:

- HYDAC Accessories product catalogue No. 61.000

Quick and easy – Accu-MOUNT

You can use our tool to find the matching accumulator mount, see: [www.hydac.com/Service/Online tools](http://www.hydac.com/Service/Online%20tools)

1.2. APPLICATION

The optimum mounting type strongly depends on the use, type and size of the accumulator. Clamps, consoles and accumulator mounting sets are all possible options. As they are safety equipment, our mounting elements must only be attached and installed by trained staff.


The clamp quantities for bladder and piston accumulators given in the following overviews are HYDAC recommendations that take static use and vertical mounting into account including the corresponding mounting element (e.g. HYDAC consoles).

More information on HYDAC hydraulic accumulators is available in the following catalogue sections:

- Bladder accumulators
Low pressure
No. 3.202
- Bladder accumulators
Standard design
No. 3.201
- Piston accumulators
Standard design
No. 3.301
- Piston accumulators
SK280
No. 3.303
- Diaphragm accumulators
No. 3.100
- Hydraulic accumulators with back-up nitrogen bottles
No. 3.553


1.2.1 Bladder accumulators

Clamps, consoles and accumulator mounting sets can be used for optimum mounting of the bladder accumulator. The bladder accumulator console is equipped with a rubber support ring.

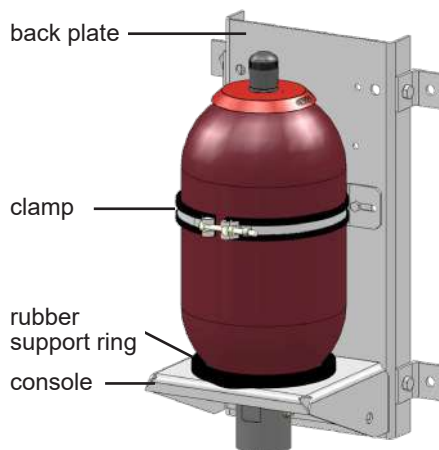


1.2.2 Piston accumulators

Clamps, consoles and accumulator mounting sets can also be used for piston accumulators. In this case, the console is not equipped with a rubber support ring. Please request accumulator mounting set for piston accumulators separately, as the design may vary considerably depending on the accumulator's nominal volume.

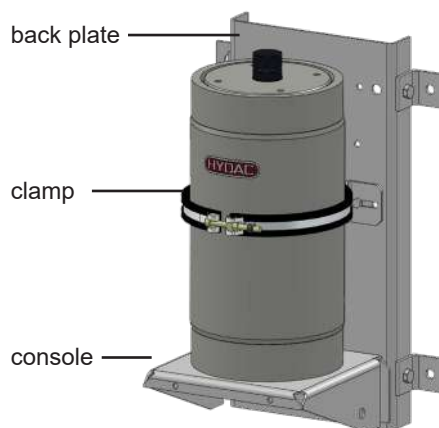

1.2.3 Diaphragm accumulators

Weld type diaphragm accumulators are fastened with an accumulator clamp and screw type diaphragm accumulators are fastened with a console. Accumulator mounting sets are not used for diaphragm accumulators.

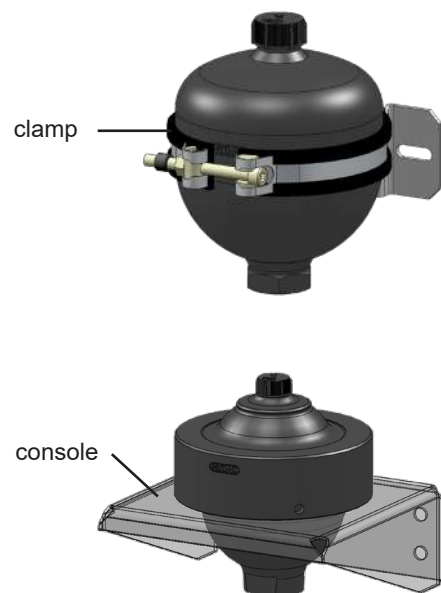

1.3. MATERIALS

The following materials are available as standard:

Clamp	
Fastening, base	zinc-plated
Band clamp	stainless steel
Insert	PE/PP/NBR
	see section 3.1.
Console	
Rubber support ring ¹⁾	NBR
Accumulator mounting set	
Clamp	see above
Console	see above
Back plate	zinc-plated

Other materials (e.g. stainless steel) are available on request.

¹⁾ Only for bladder accumulators

2.2. PISTON ACCUMULATORS

The following table shows the recommended mounting type for each piston accumulator type. The clamp is selected on the basis of the accumulator's external diameter. The number of clamps can vary depending on the requirements and on the length of the hydraulic accumulator and is a HYDAC recommendation (see section 1.2.).

To prevent deformation of the cylinder, clamps should preferably be mounted near the end caps.

Designation	Part no.	Piston diameter [mm]																											
		Accumulator external diameter [mm]																											
		50	60	80	100	125	150	180	200	250	> 250	60	75	80	95	100	120	125	150	160	175	180	210	220	235	286	300	> 300	
Clamps SK280																			on request										
HRGKSM 0 R 58-61/62 ST	3018442	●																											
HRGKSM 0 R 73-76/76 ST	444912		●																										
HRGKSM 0 R 92-95/96 ST	444995				●																								
HRGKSM 1 R 119-127/124 ST	444505						●																						
HRGKSM 1 R 146-154/151 ST	444321											●																	
HRGKSM 2 R 172-180/178 ST	444402																	●											
Clamps SK 210/350																			on request										
HRGKSM 0 R 77-80/80 ST	3018445			●																									
HRGKSM 0 R 96-100/100 ST	444953					●																							
HyRac 121-129/133 H8 ST	444906									●																			
HyRac 160-167/169 H5 ST	444910												●																
HyRac 176-185/187 H5 ST	445044																					●							
HyRac 209-217/223 H10 ST	445046																							●					
HyRac 216-224/226 H5 ST	445047																								●				
on request	-																										●		
HSS 286	237395																											●	
HSS 310	237389																										●		
Consoles																			on request										
KBK 126	290530										1																		
KBK 167	238526																				1	1							
KBK 219	238042																						1	1					
KBK 310	238043																											1	1
on request	-																								1				

● = the recommended number of clamps is available on request or from our online tool Accu-MOUNT

2.3. DIAPHRAGM ACCUMULATORS

2.3.1 Weld type

Clamps	Part no.	Accumulator type
HRGKSM 0 R 62-65/65 ST	444911	SBO250-0.075E
HRGKSM 0 R 73-76/76 ST	444912	SBO210-0.16E
HRGKSM 0 R 77-80/80 ST	3018445	SBO160-0.16E
		SBO300-0.16E
HRGKSM 0 R 92-95/96 ST	444995	SBO210-0.32E
		SBO300-0.32E
HyRac 100-105/106 H3 ST	444904	SBO160-0.5E
		SBO210-0.5E
HyRac 106-114/115 H3 ST	444905	SBO100-0.7E
HyRac 110-118/124 H10 ST	445042	SBO140-0.75E
		SBO330-0.6E
HyRac 121-129/133 H8 ST	444906	SBO210-0.75E
		SBO250-0.75E
		SBO250-1E
		SBO330-0.75E
		SBO330-1E
HyRac 133-142/142 H3 ST	444907	SBO350-0.6E
		SBO200-1E
HyRac 143-151/151 H3 ST	444908	SBO210-1.4E
		SBO210-1.4E
HyRac 152-159/160 H3 ST	444909	SBO250-1.4E
		SBO250-2E
		SBO330-1.4E
HyRac 160-167/169 H5 ST	444910	SBO100-2E
HyRac 167-175/178 H5 ST	445043	SBO210-2E
		SBO210-2.8E
		SBO250-2.8E
		SBO330-2E
		SBO330-2.8E
		SBO330-3.5E

2.3.2 Screw type


Consoles	Part no.	Accumulator type
KMS 210	358989	SBO400-1.3A6
KMS 220	359922	SBO100-2A6
		SBO250-2A6
KMS 280	359925	SBO400-2.8A6
KMS 310	359927	SBO400-4A6

2.4. SILENCERS

Clamps	Part no.	Series			
		SD330		SD280K	
		4.7	0.4	2.4	4.4
HyRac 167-175/178 H5 ST	445043	●			
HRGKSM 0 R 58-61/62 ST	3018442		●		
HRGKSM 1 R 119-127/124 ST	444505			●	
HRGKSM 1 R 146-154/151 ST	444321				●

3. TECHNICAL SPECIFICATIONS

3.1. CLAMPS



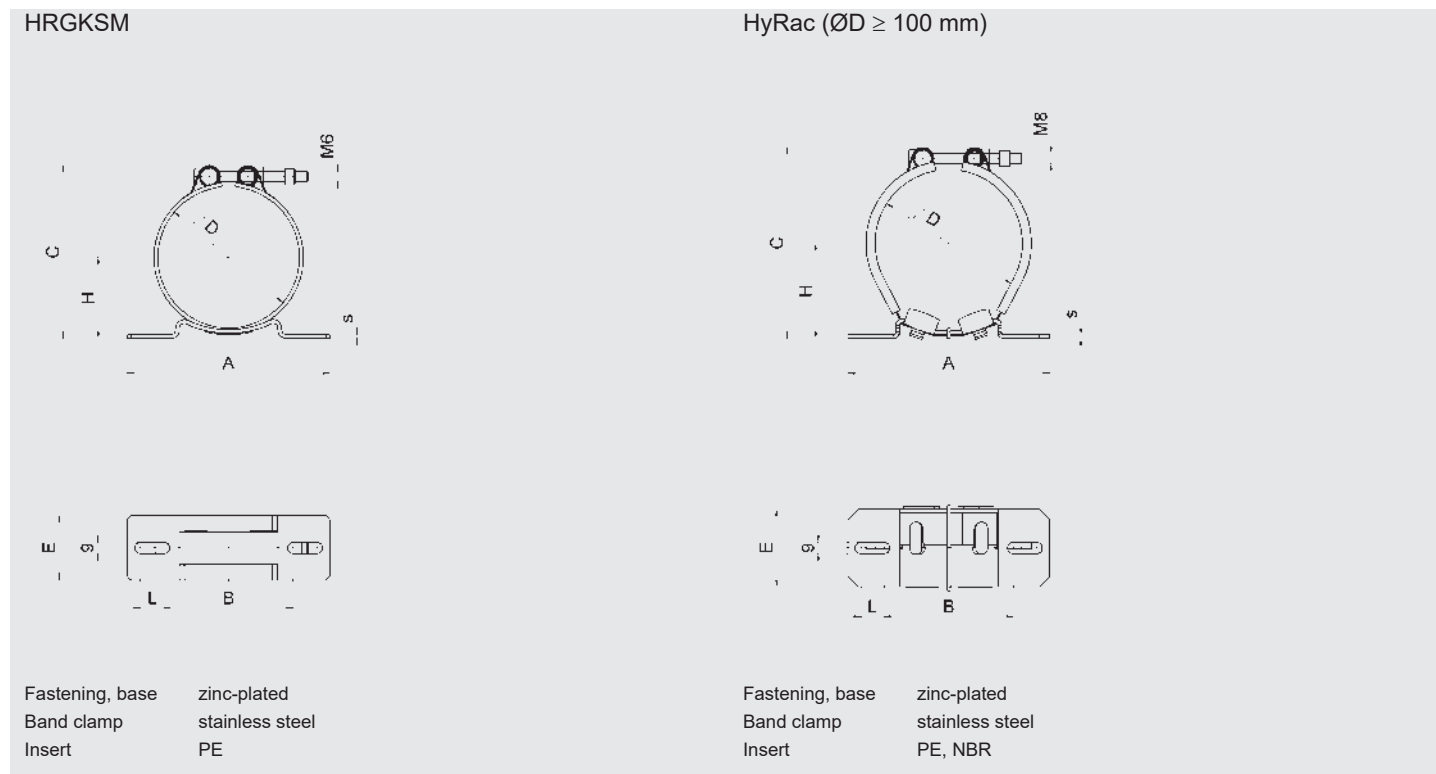


Designation	Part no.	A [mm]	B [mm]	C max [mm]	ØD (from - to) [mm]	H (from - to) [mm]	E [mm]	L [mm]	s [mm]	K max. [mm]	Weight [kg]
HRGKSM 0 R 58-61/62 ST	3018442	120	85	83	58 - 61	37.3 - 38.8	40	6	3	-	0.16
HRGKSM 0 R 62-65/65 ST	444911			85	62 - 65	38 - 39.5					0.16
HRGKSM 0 R 73-76/76 ST	444912			96	73 - 76	43.5 - 45					0.22
HRGKSM 0 R 77-80/80 ST	3018445			100	77 - 80	45.5 - 47					0.22
HRGKSM 0 R 92-95/96 ST	444995			115	92 - 95	52.5 - 54					0.24
HRGKSM 0 R 96-100/100 ST	444953			120	96 - 100	54.5 - 56.5					0.17
HRGKSM 1 R 119-127/124 ST	444505	156	100	154	119 - 127	66.8 - 70.8	50	18	-	-	0.36
HRGKSM 1 R 146-154/151 ST	444321			181	146 - 154	80.5 - 84.5					0.39
HRGKSM 2 R 172-180/178 ST	444402	236	152	209	172 - 180	94.6 - 98.6	60	32	4	-	0.53
HRGKSM 3 R 242-253/250 ST	3302566	300	222	280	242 - 253	133.5 - 139		28			0.99
HRGKSM 4 R 352-363/360 ST	444795	400	322	398	352 - 363	187.7 - 193.2					1.4
HyRac 100-105/106 H3 ST	444904	156	100	135	100 - 105	59 - 62	60	18	3	-	0.4
HyRac 106-114/115 H3 ST	444905			143	106 - 114	62.5 - 66					0.41
HyRac 110-118/124 H10 ST	445042			156	110 - 118	72.5 - 77					0.42
HyRac 121-129/133 H8 ST	444906			165	121 - 129	75.5 - 80					0.43
HyRac 133-142/142 H3 ST	444907			174	133 - 142	76.5 - 82.5					0.44
HyRac 143-151/151 H3 ST	444908			182	143 - 151	83 - 86.5					0.45
HyRac 152-159/160 H3 ST	444909			191	152 - 159	87 - 91					0.46
HyRac 160-167/169 H5 ST	444910			197	160 - 167	89 - 93					0.7
HyRac 167-175/178 H5 ST	445043	207	167 - 175	92.5 - 96.5	0.72						
HyRac 176-185/187 H5 ST	445044	241	176 - 185	97 - 102.5	0.75						
HyRac 209-217/223 H10 ST	445046	236	152	255	209 - 217	122.5 - 126.5	60	32	4	-	0.77
HyRac 216-224/226 H5 ST	445047			256	216 - 224	120 - 124					0.77
HyRac 223-230/231 H3 ST	445048			259	223 - 230	120.5 - 123.5					0.78
HyRac 225-234/234 H3 ST	445049			265	225 - 234	123 - 127.5					0.79

HSS

HRRBS

HRVMS

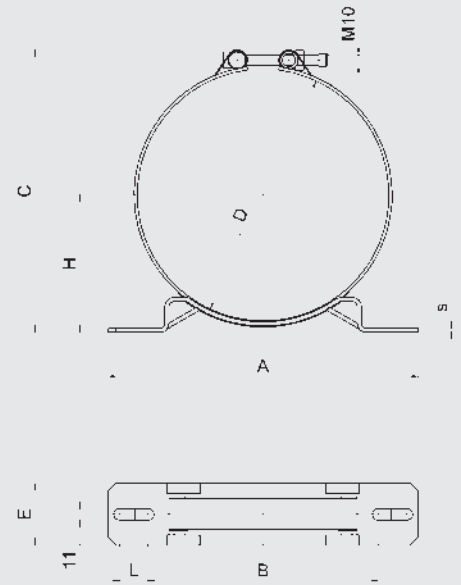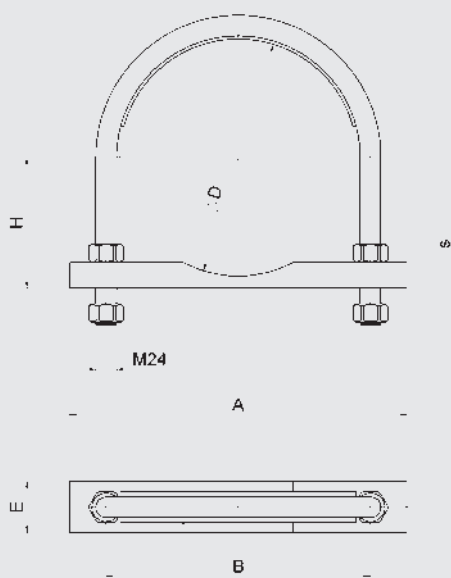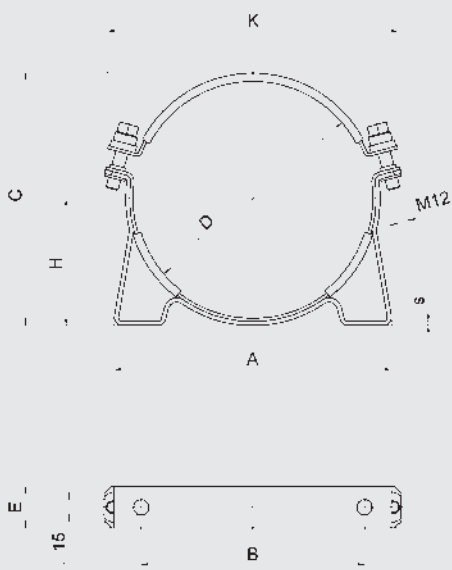

Clamp zinc-plated
Insert NBR

Clamp zinc-plated
Insert PP

Clamp zinc-plated
Clamping band stainless steel
Insert PE


Designation	Part no.	A [mm]	B [mm]	C max [mm]	ØD (from - to) [mm]	H (from - to) [mm]	E [mm]	L [mm]	s [mm]	K max. [mm]	Weight [kg]
HSS 222/229	235224*	270	216	244	226	123	40	-	4	295	1.7
HSS 242	362712	268	216	265	242	136				305	1.7
HSS 286	237395	332	280	314	286	163				355	2.1
HSS 310	237389	332	280	333	310	170				380	2.1
HRRBS 14 L 267 PP ST ZN	431645	370	302	-	267 - 273	121.5 - 124.5	50	-	25	-	2.66
HRRBS 17 B1L 406 PP ST M ZN B145 H525	3434519	540	440	-	406.4 - 419	401.4 - 405	60	-	30	-	6.15
HRVMS 3 R 248-259/256 ST	3489871	300	222	292	248 - 259	135.5 - 141	60	28	4	-	1.05
HRVMS 3 R 268-279/276 ST	3559057			311	268 - 279	144.8 - 150.9					1.1

* Alternative to part no. 445048 and 445049


3.2. CONSOLES

3.2.1 KBK consoles for bladder accumulators and gas pressure vessels

KBK

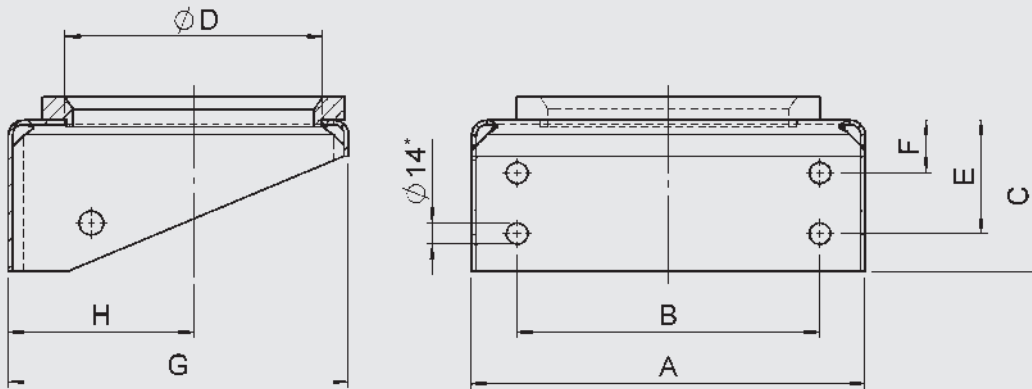

KHF

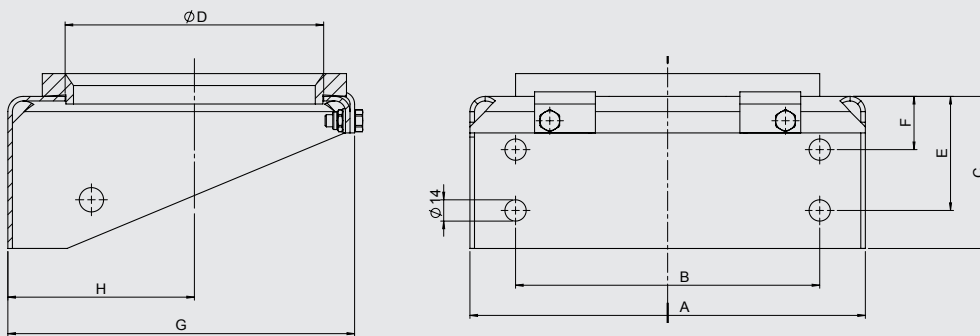

* $\varnothing 22$ for KBK 360/G

Designation	Part no.	A [mm]	B [mm]	C [mm]	$\varnothing D$ [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Weight [kg]
KBK 167/G	2107989	260	200	100	120	75	35	225	92	2.5
KBK 222/G	2100651	260	200	100	170	75	35	225	123	2.4
KBK 360/G	2107990	390	270	240	211	180	60	390	195	20.1
KHF 210/G ¹⁾	3111594	260	200	100	170	75	35	230	123	2

Spare parts


Designation	Part no.
KBK 167	238526
G 167	236997
KBK 222	3002160
G 222 ²⁾	236996
KBK 360	357959
G 360	355966
KHF 210	239965

¹⁾ See also section 3.3., SEHB


²⁾ Also for KHF 210

Rubber support ring


G 167




G 222



G 360




3.2.2 KBK consoles for piston accumulators

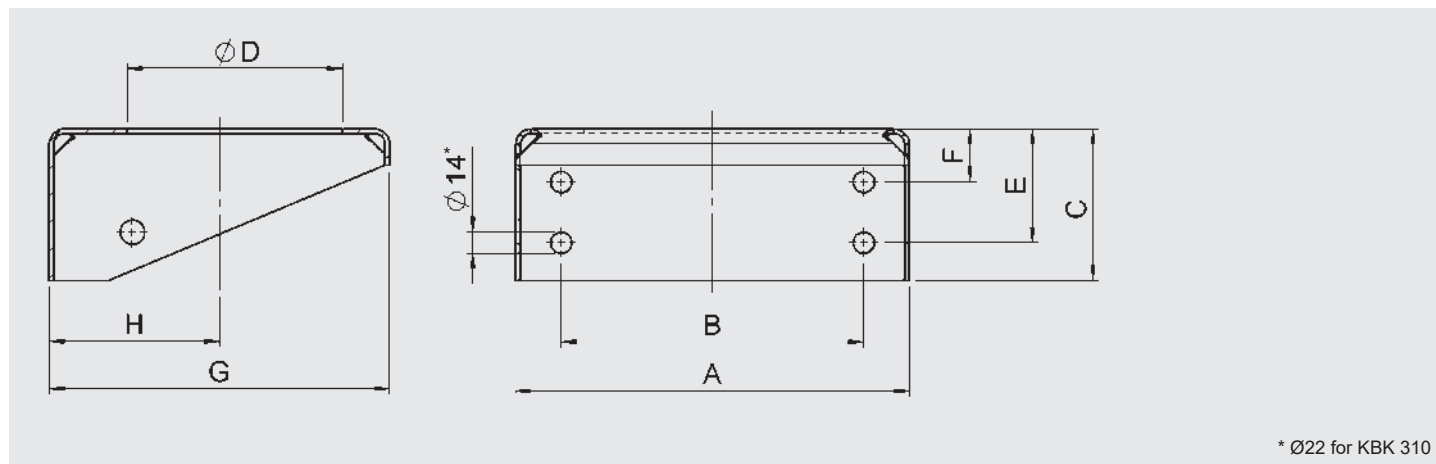

* Ø22 for KBK 310

Designation	Part no.	A [mm]	B [mm]	C [mm]	ØD [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Weight [kg]
KBK 126	290530	175	100	60	65	36	–	150	77	1.1
KBK 167	238526	260	200	100	120	65	25	225	92	2.4
KBK 219	238042	270	180	100	135	80	40	250	123	6.5
KBK 310	238043	330	220	200	190	140	60	340	170	18.3



3.2.3 KMS consoles for screw type diaphragm accumulators

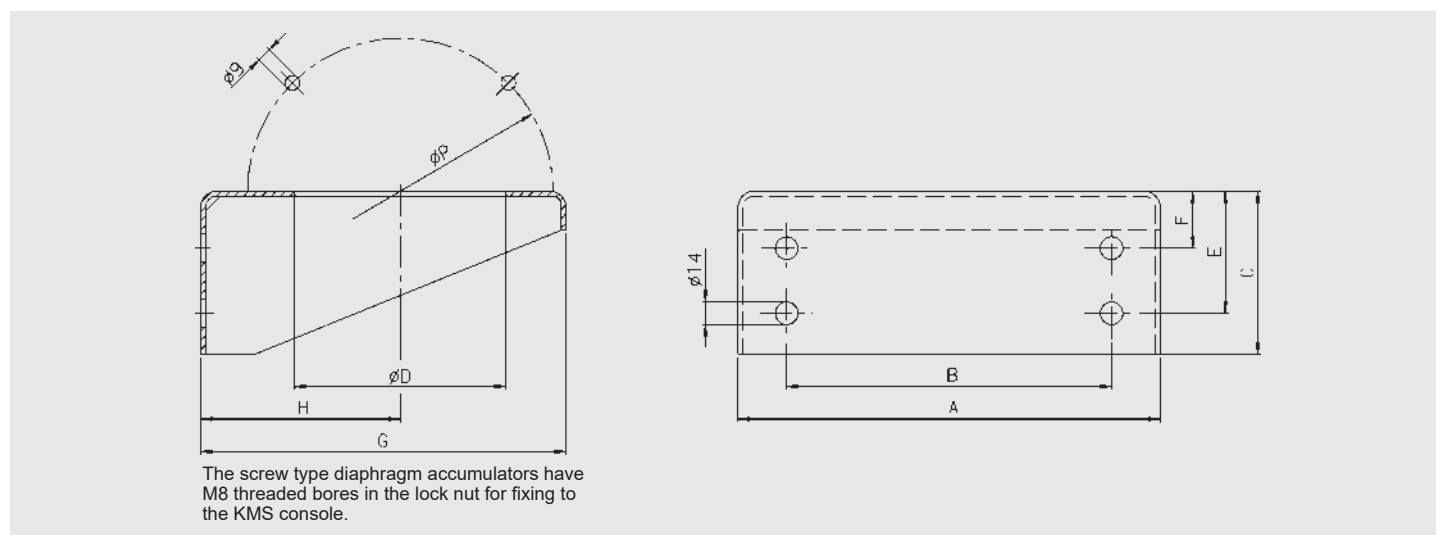

The screw type diaphragm accumulators have M8 threaded bores in the lock nut for fixing to the KMS console.

Designation	Part no.	A [mm]	B [mm]	C [mm]	ØD [mm]	ØP [mm]	E [mm]	F [mm]	G [mm]	H [mm]	ØI [mm]	Weight [kg]
KMS 210	358989	260	200	100	170	180	75	35	225	123	14	2.4
KMS 220	359922				170	188						
KMS 280	359925	330	220	200	215	230	140	60	340	170	22	18.3
KMS 310	359927				245	265						

3.3. ACCUMULATOR MOUNTING SET FOR BLADDER ACCUMULATORS

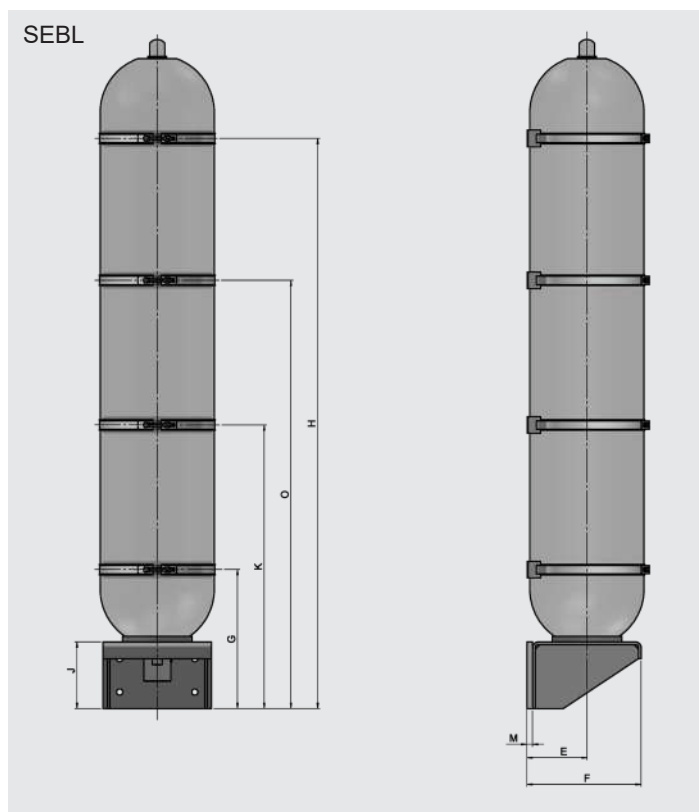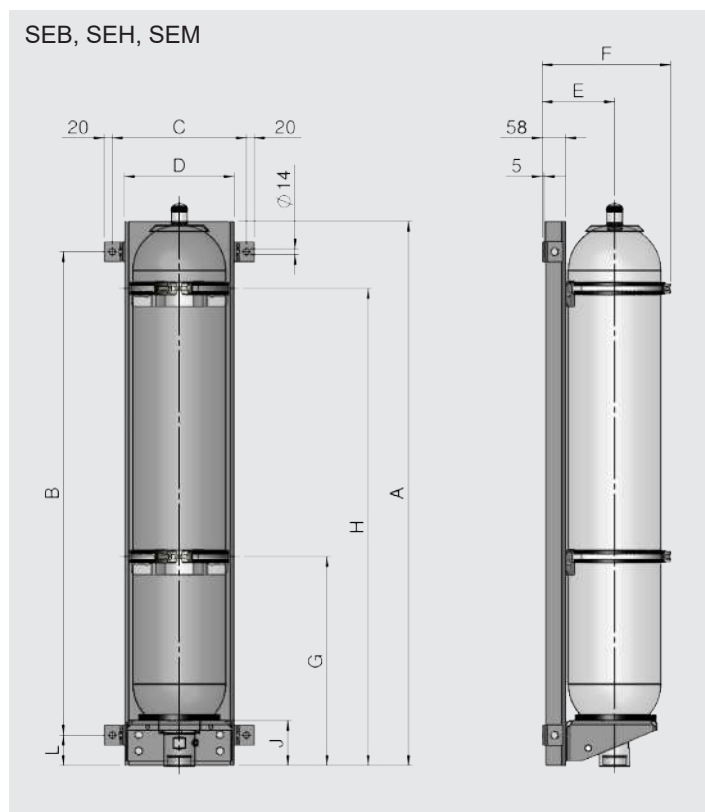

Designation	Part no.	Vol. [l]	A [mm]	B [mm]	C [mm]	D [mm]	E max. [mm]	F max. [mm]	G [mm]	H [mm]	K [mm]	O [mm]	M [mm]	L [mm]	J [mm]
-------------	----------	----------	--------	--------	--------	--------	-------------	-------------	--------	--------	--------	--------	--------	--------	--------

SEB for SB330/440

SEB 2.5	290787	2.5	460	310	198	138	134	209	220	410				75	—
SEB 4	238403	4	410	320						270				45	95
SEB 6	2115851	6	570	420			154	285		415					
SEB 10 narrow	4189835	10	1340	1190	330	270				500	1160				
SEB 10	238407		580	330											
SEB 13-20	240598	13	570	420			185	318		500				75	111
		20								500					
SEB 32	238409	32	1340	1190						1160					
SEB 50	240599	50								1160					
SEBL 60-80 ¹⁾	3605561	60					195	390	500	930					
		80								1200					
SEBL 100-130 ¹⁾	372132	100								1450	950				240
		130								1750	1100				
SEBL 160 ¹⁾	4482591	160					215	410	500	1750	1125		20		
SEBL 200 ¹⁾	4500010	200								2050	1020				

SEH for SB500/550/600

SEH 2.5	2105194	2.5	460	310	198	138	136	215	220	410				75	—
SEH 5	2105195	5	750	600						650					
SEH 10	378952	10	570	420	330	270	197	326		330				75	111
SEH 20	298181	20								500					
SEH 32	298182	32	1340	1190						500	1160				
SEH 50	298183	50								1160					

SEM for SB40



SEM 2.5	3007402	2.5	460	310	198	138	123	194	220	410				75	—
SEM 5	3007423	5	750	600						650					
SEM 10	3007424	10	570	420	330	270	179	307		330				75	111
SEM 20	3007425	20								500					
SEM 32	3007426	32	1340	1190						500	1160				
SEM 50	3007427	50								1160					

¹⁾ SEBL with back plate possible on request

The SEB accumulator mounting set is also available with an SAF and SB330 as a compact unit (ACCUSET SB330). See catalogue section:

- ACCUSET SB
No. 3.503

SEHB

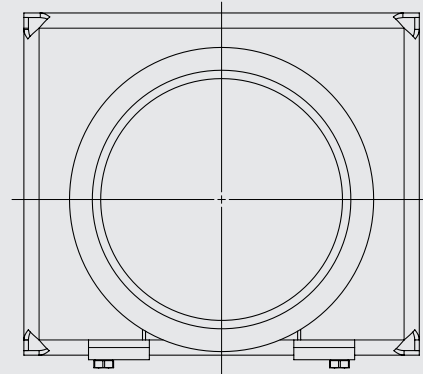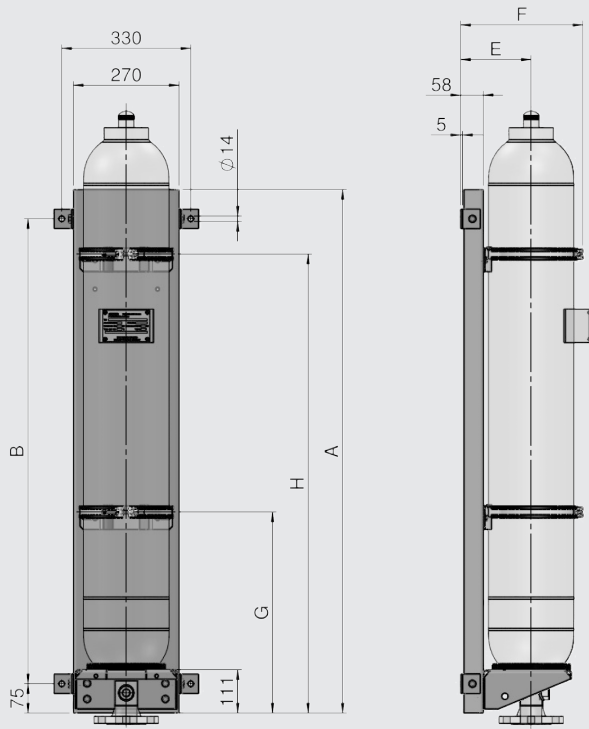

Notice: The console (KHF 210/G) included in the SEHB accumulator mounting sets is opened at the front for easier mounting of the bladder accumulator.

Designation	Part no.	Vol. [l]	A [mm]	B [mm]	C [mm]	ØD [mm]	E max. [mm]	F max. [mm]	G [mm]	H [mm]	L [mm]	J [mm]	Weight [kg]
SEHB accumulator mounting set for SB35HB													
SEHB 20	3007431	20	570	420	—	—	184	312	—	500	75	111	—
SEHB 32	3007432	32	1340	1190	—	—	184	312	500	1160	75	111	—
SEHB 50	3007433	50	1340	1190	—	—	184	312	500	1160	75	111	—

6. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH
 Industriegebiet
66280 Sulzbach/Saar, Germany
 Tel.: +49 (0) 68 97 / 509 - 01
 Fax: +49 (0) 68 97 / 509 - 464
 Internet: www.hydac.com
 E-mail: speichertechnik@hydac.com

ACCUSET SB



1. DESCRIPTION

The HYDAC accumulator unit ACCUSET SB consists of an SB bladder accumulator, an SAF safety and shut-off block and the appropriate SEB accumulator mounting set. The parts are designed for optimum compatibility and form a compact, ready-to-install device.

This space-saving combination simplifies the connection of the hydraulic accumulator to the hydraulic system, reduces maintenance costs and considerably reduces the time and effort required for installation.

Advantages:

- Simple and secure hydraulic accumulator mounting at the installation site
- Connection of the hydraulic accumulator to a hydraulic system via a safety and shut-off block
- Protects the hydraulic accumulator from excessive pressure
- Hydraulic accumulator discharge to the tank via a pressure release valve
- Separation of the hydraulic accumulator from the system
- Two additional hydraulic connections on the shut-off block for accessories (e.g. pressure gauge).

1.1. STANDARD BLADDER ACCUMULATOR SB330

With a nominal volume of 1 ... 50 litres.
Special accumulators available on request.

See catalogue section:

- Bladder accumulators
Standard design
No. 3.201

1.2. SAF SAFETY AND SHUT-OFF BLOCK

In nominal sizes 10, 20 and 32, with manual or solenoid-operated/manual discharge and with the direct-acting DB12 pressure relief valve with CE marking, in accordance with the regulations of DIN EN 14359 "Gas-loaded accumulators for fluid power applications" and the European Pressure Equipment Directive (PED).

See catalogue section:

- SAF/DSV safety and shut-off block
No. 3.551

1.3. SEB ACCUMULATOR MOUNTING SET

For mounting the bladder accumulator with clamps, a back plate, a console and a rubber support ring.

See catalogue section:

- Mounting elements for hydraulic accumulators
No. 3.502

2. TECHNICAL DATA

2.1. SIZING

European Pressure Equipment Directive (PED) ¹⁾

2.2. PERMITTED OPERATING PRESSURE

330 bar ¹⁾

2.3. PERMITTED OPERATING TEMPERATURE OF THE HYDRAULIC ACCUMULATOR

-10 °C ... +80 °C

For standard versions (NBR, carbon steel), others on request

2.4. BLADDER MATERIAL

The bladder material must be selected in accordance with the particular operating medium or operating temperature, see section 2.9.

If discharge conditions are unfavourable (high p_2/p_0 pressure ratio, rapid discharge speed), the gas may cool to below the permitted temperature. This can cause cold cracking. The gas temperature can be calculated using the HYDAC Accumulator Simulation Program **ASP**.

2.5. PRESSURE LIMIT

DB12 set to 330 bar ¹⁾

2.6. RELEASE VALVE

Operating voltage 24 V DC ¹⁾

2.7. FLUID PORT P

See table in section 5.

2.8. SURFACE

The hydraulic accumulator is primed, the SAF block is phosphate-plated and the accumulator mounting set is zinc-plated.

See catalogue section:

- HYDAC Accumulator Technology
No. 3.000
- FPU Charging and Testing Unit
No. 3.501

¹⁾ Others on request

2.9. WORKING TEMPERATURE AND OPERATING MEDIUM

The permitted working temperature of a bladder accumulator is dependent on the application limits of the metal materials and the bladder. Outside this temperature range, special materials must be used. The operating medium must also be taken into account. The following table displays a selection of elastomer materials including max. temperature range and a rough overview of resistant and non-resistant fluids. Please contact us for help in selecting a suitable elastomer.

Materials		Material code 1)	Temperature range	Overview of the fluids 2)	
				Resistant to	Not resistant to
NBR	Acrylonitrile butadiene rubber	2	-15 °C ... + 80 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the groups HFA, HFB, HFC ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Fuels
		5	-50 °C ... + 50 °C		
		9	-30 °C ... + 80 °C		
ECO	Ethylene oxide epichlorohydrin rubber	3	-30 °C ... +120 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Flame-retardant fluids from the group HFB ● Synthetic esters (HEES) ● Water ● Sea water 	<ul style="list-style-type: none"> ● Aromatic hydrocarbons ● Chlorinated hydrocarbons (HFD-S) ● Amines and ketones ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the groups HFA and HFC ● Fuels
IIR	Butyl rubber	4	-50 °C ... +100 °C	<ul style="list-style-type: none"> ● Hydraulic fluids from the group HFD-R ● Flame-retardant fluids from the group HFC ● Water 	<ul style="list-style-type: none"> ● Mineral oils and mineral greases ● Synthetic esters (HEES) ● Aliphatic, chlorinated and aromatic hydrocarbons ● Fuels
FKM	Fluorine rubber	6	-10 °C ... +150 °C	<ul style="list-style-type: none"> ● Mineral oil (HL, HLP) ● Hydraulic fluids from the group HFD ● Synthetic esters (HEES) ● Fuels ● Aromatic hydrocarbons ● Inorganic acids 	<ul style="list-style-type: none"> ● Amines and ketones ● Ammonia ● Skydrol and HyJet IV ● Steam

1) See section 3. Model code, accumulator bladder/sealing material

2) Others on request

Temperatures exceeding this range (e.g. in the event of an external fire) can result in the hydraulic accumulator bursting. To prevent this, HYDAC can provide additional temperature fuses and burst discs, see catalogue section:

- Safety equipment for hydraulic accumulators
No. 3.552

2.9. NOTICE

All work with HYDAC bladder accumulators or safety and shut-off blocks must only be carried out by suitably trained staff.

Incorrect installation or handling can lead to serious accidents.

The operating instructions must be observed!

- Operating instructions SB bladder accumulators
No. 3.201.BA
- Operating instructions SAF safety and shut-off block
No. 3.551.BA

Detailed assembly and repair instructions are available for work which may be carried out on the bladder accumulator after installation and commissioning, e.g. repair work.
No. 3.201.M

Further information such as accumulator sizing, safety information and extracts from the acceptance specifications can be found in the following catalogue section:

- HYDAC Accumulator Technology
No. 3.000

Relevant PDF documents can be accessed at:
www.hydac.com » Downloads » Documents » Accumulator Division

3. MODEL CODE

Not all combinations are possible. Order example.
For further information, please contact HYDAC.

ACCUSET SB 330 - 10 A 1 / 1 1 2 U - 10 Y 1 - 330

Type of accumulator

SB = bladder accumulator

Series

Nominal volume [l]

Fluid port

A = standard connection

Gas valve

1 = standard version

Material of fluid port/block

1 = carbon steel
2 = stainless steel (dependent on type and pressure level)

Shell material

1 = carbon steel

Accumulator bladder/seal material

2 = NBR / NBR
3 = ECO / NBR
4 = IIR / EPDM
6 = FKM / FKM

Certification code

SAF block series

Type – poppet valve


M = manual discharge
Y = solenoid-operated and manual discharge (normally open)
Z = solenoid-operated and manual discharge (normally closed)

Type of voltage – poppet valve

1 = 24 V DC (only for Y or Z version)

Permitted operating pressure/response pressure of the pressure relief valve [bar]

Circuit diagram

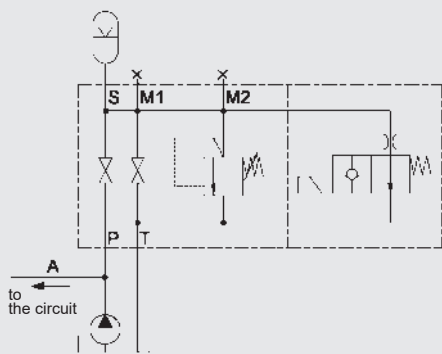


4. PREFERRED MODELS

Designation	Part no.	SB330-1A1/112U-330A	SB330-2.5A1/112U-330A	SB330-4A1/112U-330A	SB330-6A1/112U-330A	SB330-10A1/112U-330A	SB330-13A1/112U-330A	SB330-20A1/112U-330A	SB330-24A1/112U-330A	SB330-32A1/112U-330A	SB330-50A1/112U-330A	SAF10M12T330A	SAF10E12Y1T330A	SAF20M12T330A	SAF20E12Y1T330A	SAF32M12T330A	SAF32E12Y1T330A
ACCUSET SB330-1A1/112U-10M-330	3033471	●										●					
ACCUSET SB330-1A1/112U-10Y1-330	3033472	●											●				
ACCUSET SB330-2.5A1/112U-10M-330	3033473		●									●					
ACCUSET SB330-2.5A1/112U-10Y1-330	3033474		●										●				
ACCUSET SB330-4A1/112U-10M-330	3033475			●								●					
ACCUSET SB330-4A1/112U-10Y1-330	3033476			●									●				
ACCUSET SB330-6A1/112U-10M-330	3033477				●							●					
ACCUSET SB330-6A1/112U-10Y1-330	3033478				●								●				
ACCUSET SB330-10A1/112U-10M-330	3033479					●						●					
ACCUSET SB330-10A1/112U-10Y1-330	3033480					●							●				
ACCUSET SB330-13A1/112U-10M-330	3033481						●					●					
ACCUSET SB330-13A1/112U-10Y1-330	3033482						●						●				
ACCUSET SB330-13A1/112U-20M-330	3033483						●							●			
ACCUSET SB330-13A1/112U-20Y1-330	3033484						●								●		
ACCUSET SB330-20A1/112U-20M-330	3033485							●						●			
ACCUSET SB330-20A1/112U-20Y1-330	3033486							●							●		
ACCUSET SB330-24A1/112U-20M-330	3033487								●					●			
ACCUSET SB330-24A1/112U-20Y1-330	3033488								●						●		
ACCUSET SB330-32A1/112U-20M-330	3033489									●				●			
ACCUSET SB330-32A1/112U-20Y1-330	3033490									●					●		
ACCUSET SB330-32A1/112U-32M-330	3033491									●						●	
ACCUSET SB330-32A1/112U-32Y1-330	3033492									●							●
ACCUSET SB330-50A1/112U-20M-330	3033493										●			●			
ACCUSET SB330-50A1/112U-20Y1-330	3033494										●				●		
ACCUSET SB330-50A1/112U-32M-330	3033495										●					●	
ACCUSET SB330-50A1/112U-32Y1-330	3033496										●						●

Other combinations and models available on request

5. DIMENSIONS

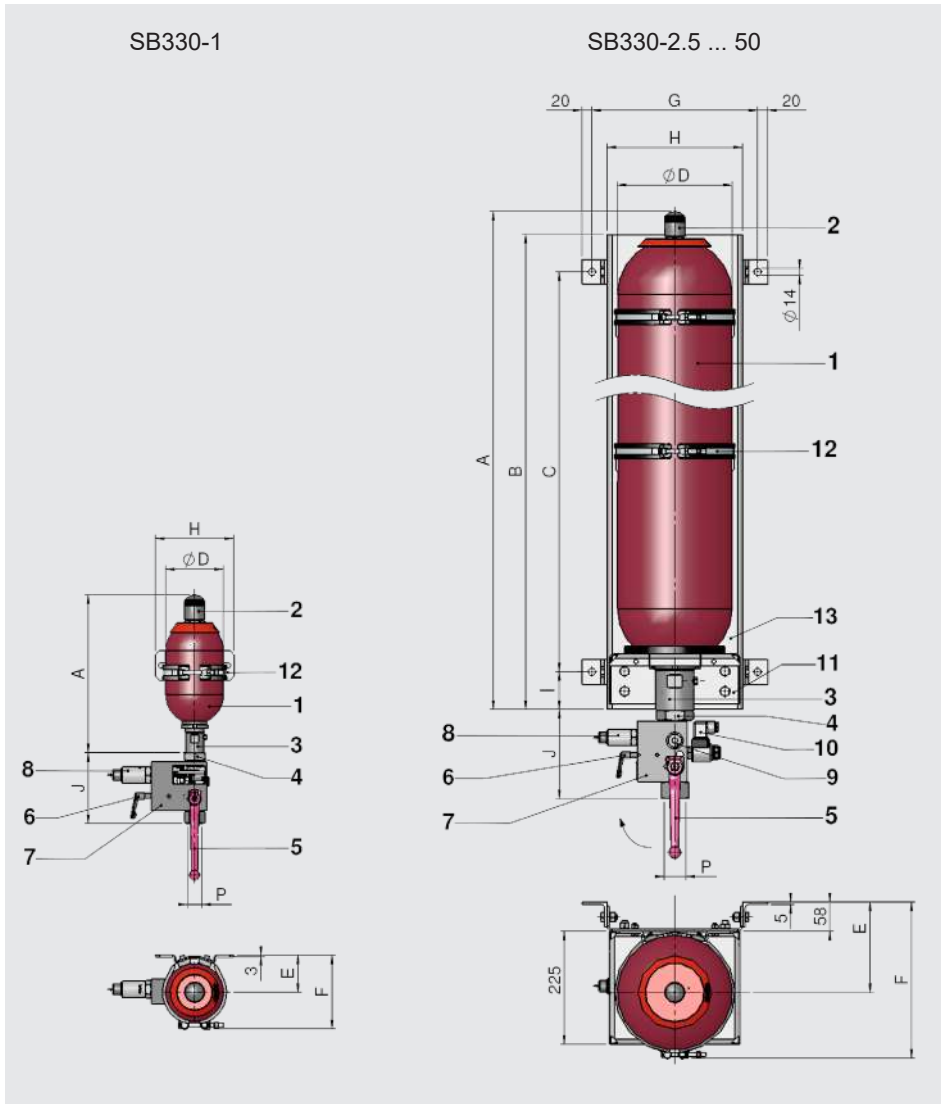

Bladder accumulator	A _{max} [mm]	B [mm]	C [mm]	ØD _{max} [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]
SB330-1 ¹⁾	302	–	–	118	74	147	–	156	–
SB330-2.5 ²⁾	571	460	310		133	214	198	138	75
SB330-4	440	415	320	173	152	253	330	270	75
SB330-6	560	570	420						
SB330-10	568								
SB330-13	686								
SB330-20	896								
SB330-24	1062								
SB330-32	1411	1340	1190						
SB330-50	1931								

¹⁾ Without back plate and console, with one HyRac clamp 110-118/124 H10 ST

²⁾ Without console, with back plate and two HyRac clamps 110-118/124 H10 ST


SAF series	Nominal size SB330 [l]	P ISO 228	Connection for pressure gauge	J [mm]
SAF	1	G 1/2	2 x G 1/4	142
	2.5			104
	4			113
	6			102
	≥ 10			147
SAF20	2.5	G 1	G 1/4, G 1/2	135
	4			142
	6			132
	≥ 10			178
SAF32	≥ 10	G 1 1/2		203


Description	Item
Accumulator shell	1
Gas valve	2
Oil valve	3
Adapter S	4
Switching handle	5
Pressure release valve	6
SAF safety block	7
Pressure relief valve	8
Connection for pressure gauge	9
Release valve	10
Console	11
HyRac clamp	12
Back plate	13

6. NOTE

The information in this brochure relates to the operating conditions and fields of application described. For applications and/or operating conditions not described, please contact the relevant technical department. Subject to technical modifications.

HYDAC Technology GmbH
 Industriegebiet
66280 Sulzbach/Saar, Germany
 Tel.: +49 (0) 68 97 / 509 - 01
 Fax: +49 (0) 68 97 / 509 - 464
 Internet: www.hydac.com
 E-mail: speichertechnik@hydac.com

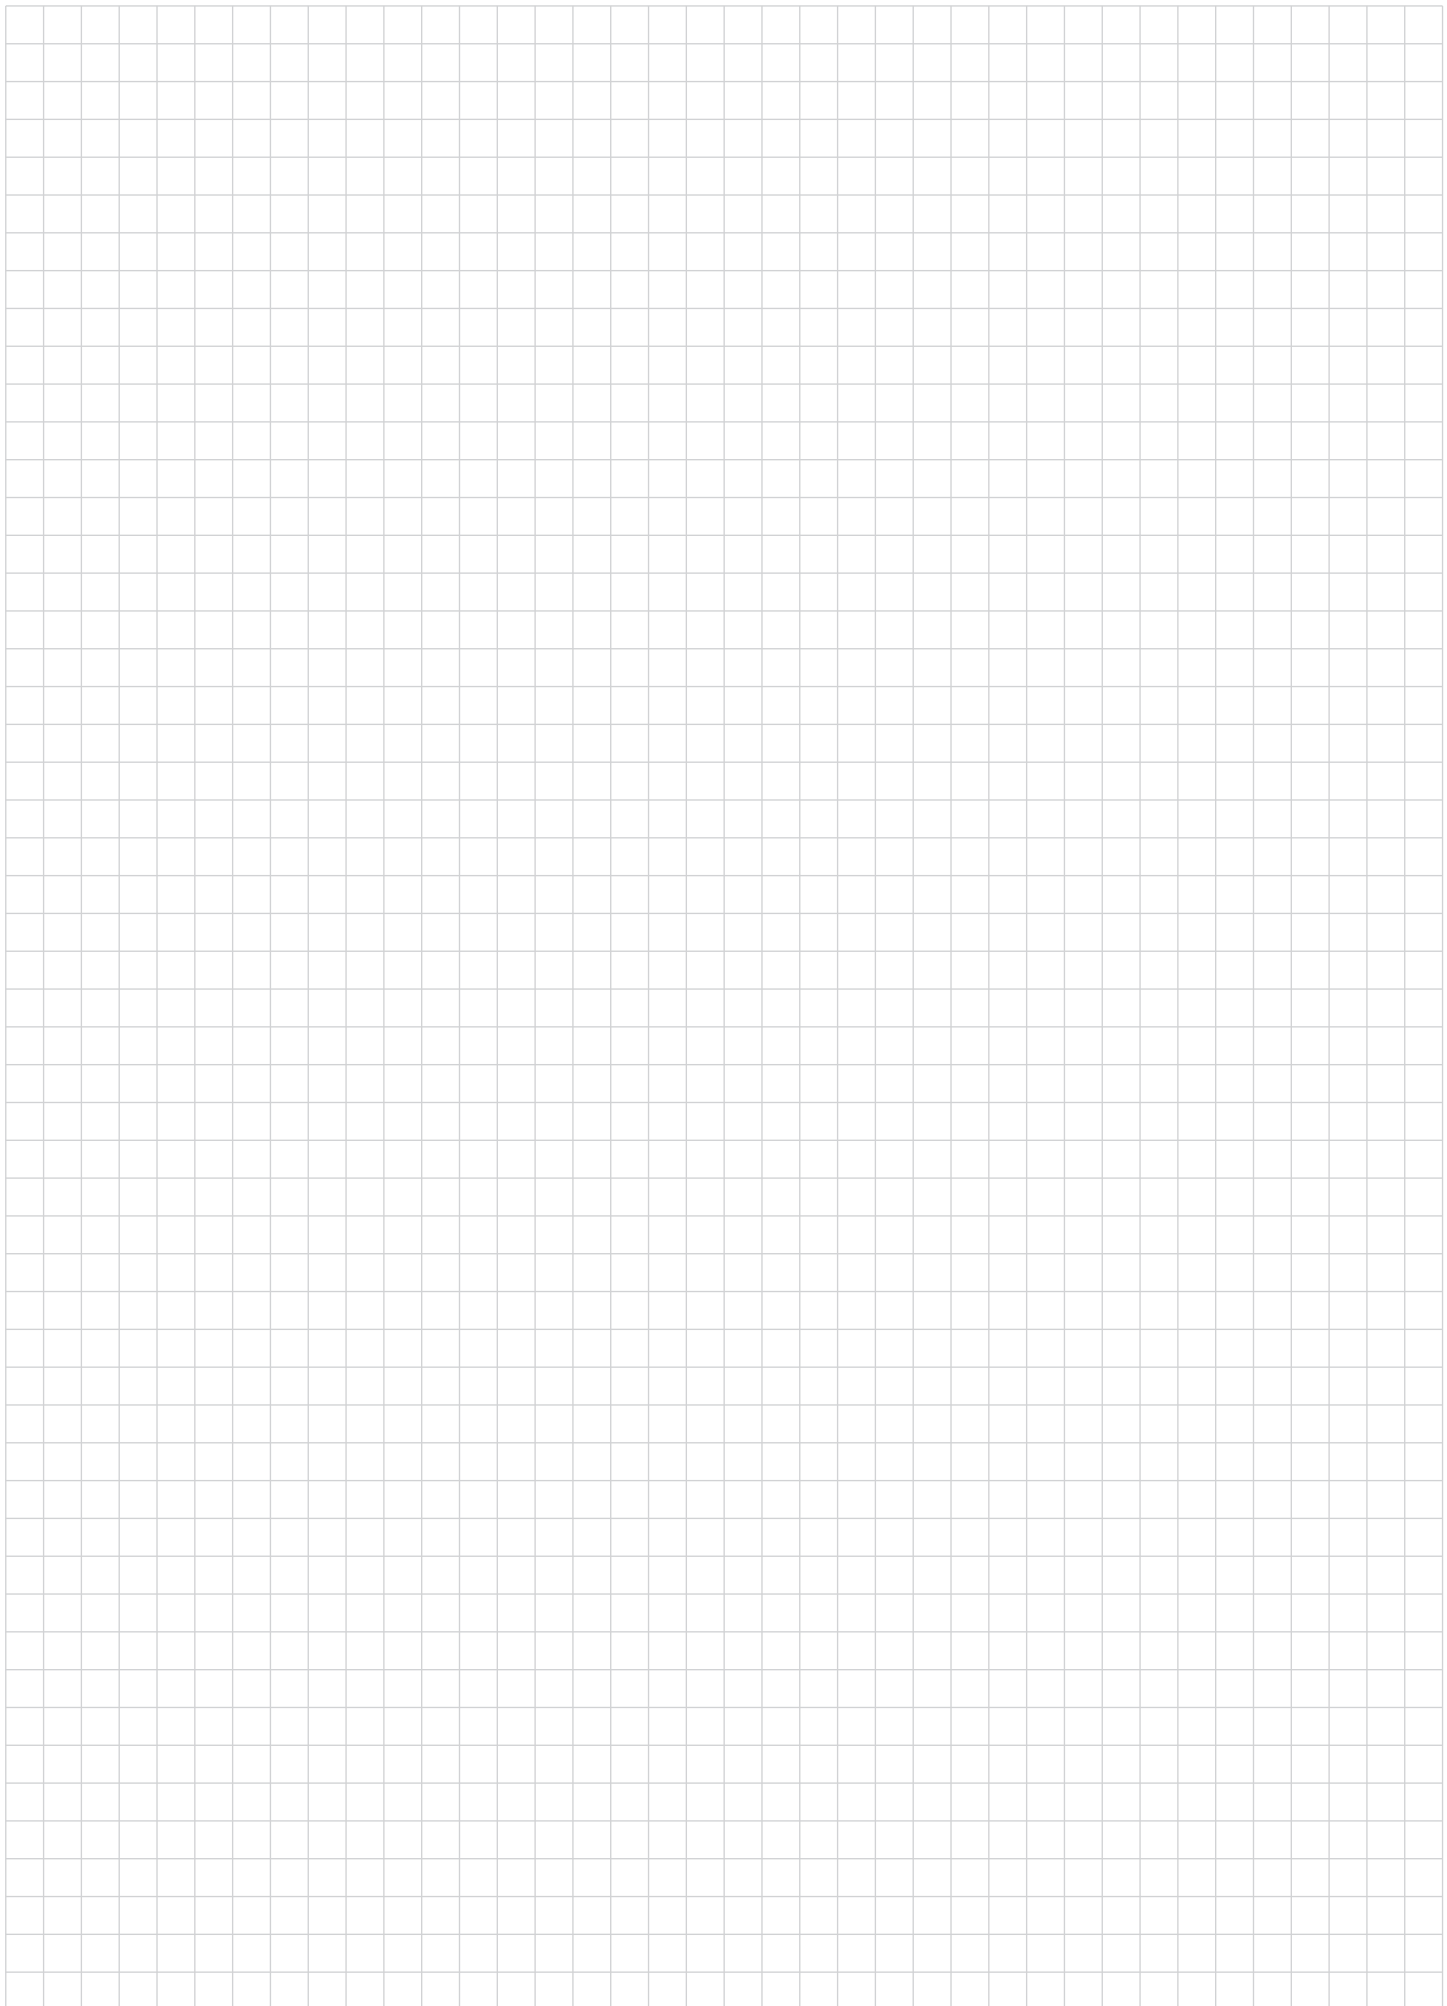

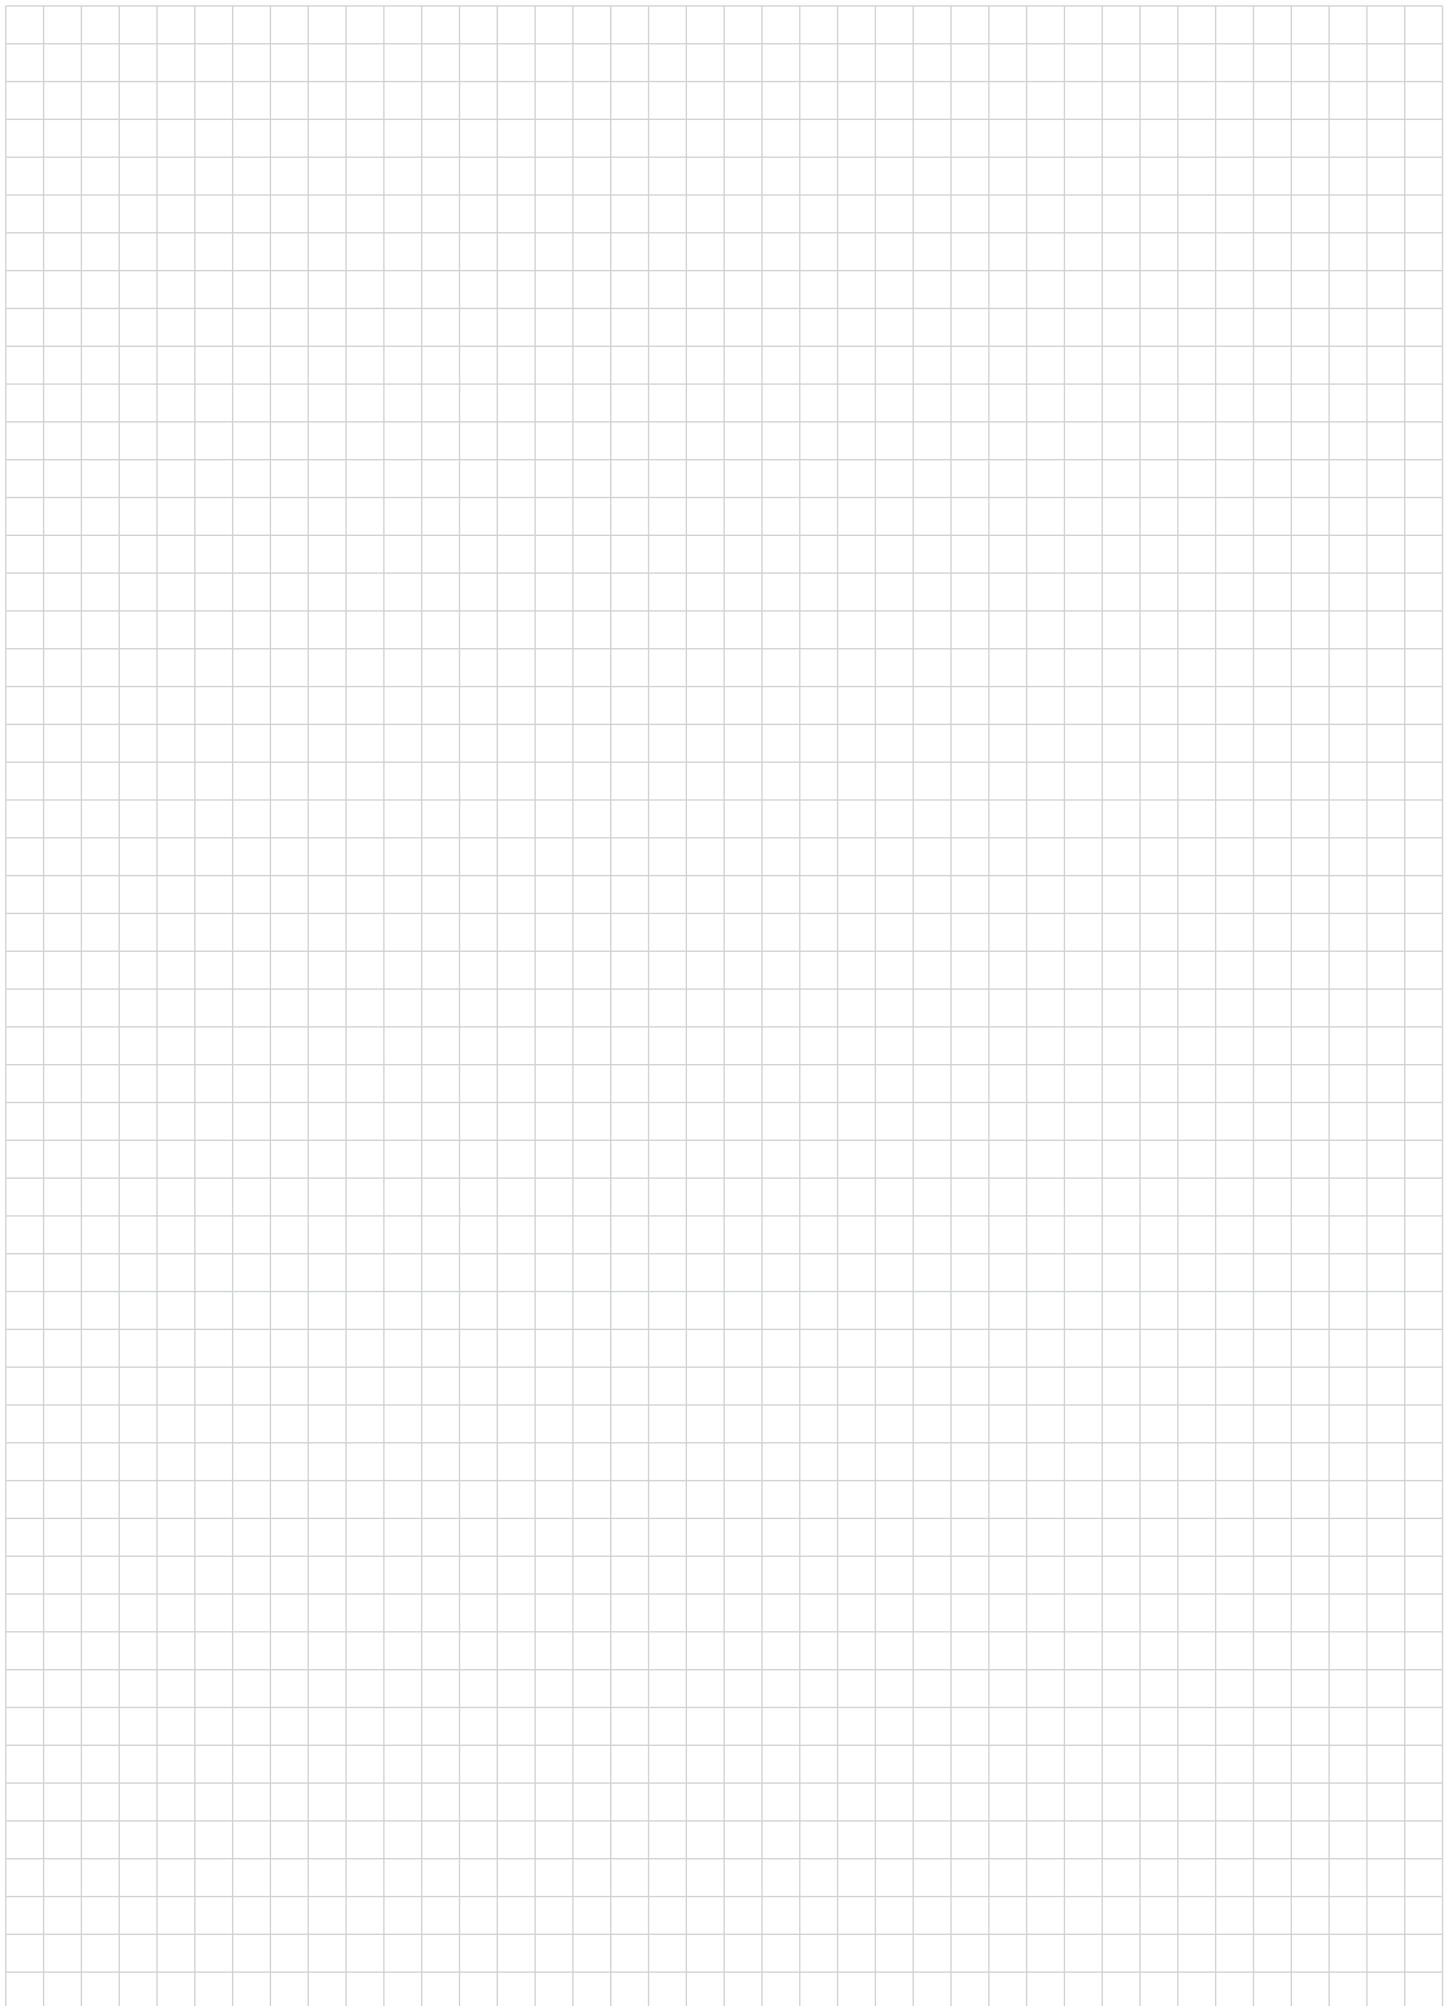

DE AR AT AU BE BG BR BU CA

GERMANY
 HYDAC-Büro Südost
 Wiesestr. 189
07551 Gera
 Tel.: +49 (0)365 / 73 97 5320
 Fax: +49 (0)365 / 73 97 5310
 HYDAC-Büro Nordost
 Zum Kiebsberg 16
14979 Großbeeren
 Tel.: +49 (0)33701 / 3389-0
 Fax: +49 (0)33701 / 3389-4499
 HYDAC-Büro Hamburg
 Mühlentweg 131-139
22844 Norderstedt
 Tel.: +49 (0)40 / 52 60 07-0
 Fax: +49 (0)40 / 52 60 07-15
 HYDAC-Büro Bremen
 Riedemannstr. 1
27572 Bremerhaven
 Tel.: +49 (0)471 / 700572-4200
 HYDAC-Büro Nord
 Oldenburger Allee 41
30659 Hannover
 Tel.: +49 (0)511 / 56 35 35-0
 Fax: +49 (0)511 / 56 35 35-56
 HYDAC-Büro West
 Münchener Str. 61
45145 Essen
 Tel.: +49 (0)201 / 320 89 51-00
 Fax: +49 (0)201 / 320 89 52-22
 HYDAC-Büro Mitte
 Dieselsstr. 9
64293 Darmstadt
 Tel.: +49 (0)6151 / 81 45-0
 Fax: +49 (0)6151 / 81 45-22
 HYDAC-Büro Südwest
 Rehgrabenstr. 3
66125 Saarbrücken-Dudweiler
 Tel.: +49 (0)6897 / 509-01
 Fax: +49 (0)6897 / 509-1422
 HYDAC-Büro Süd
 Dieselsstr. 30
71546 Aspach
 Tel.: +49 (0)7191 / 34 51-0
 Fax: +49 (0)7191 / 34 51-4033
 HYDAC-Büro München
 Am Anger 8
82237 Würthsee/Ettersschlag
 Tel.: +49 (0)8153 / 987 48-0
 Fax: +49 (0)8153 / 987 48-4822
 HYDAC-Büro Nürnberg
 Reichswaldstr. 52
90571 Schwaig
 Tel.: +49 (0)911 / 24 46 43-0
 Fax: +49 (0)911 / 24 46 43-4260
 HYDAC-Büro Berlin
 IBH Ingenieurbüro und
 Handelsvertretung Hammer GmbH
 Kaiser-Wilhelm-Str. 17
12247 Berlin
 Tel.: +49 (0)30 / 772 80 50
 Fax: +49 (0)30 / 773 80 80
ARGENTINA
 HYDAC Technology Argentina S.R.L.
 Av. Belgrano 2729
(B1611DVG) Don Torcuato
 Tigre / Buenos Aires
 Tel.: +54 11 4727-1155/-0770/-2323
 E-mail: argentina@hydac.com
AUSTRIA
 (Slovenia, Croatia, Bosnia-Herzegovina,
 Serbia and Montenegro, Macedonia)
 HYDAC Hydraulik Ges.m.b.H.
 Industrierstr. 3
4066 Pasching
 Tel.: +43 7229 / 6 18 11-0
 Fax: +43 7229 / 6 18 11-35
 E-mail: info@hydac.at
AUSTRALIA
 HYDAC PTY. LTD.
 109 Dohertys Road
Altona North, VIC 3025
 Postal address:
 P.O. Box 224
Altona North, VIC 3025
 Tel.: +61 3 / 92 72 89 00
 Fax: +61 3 / 98 360 80 70
 E-mail: info@hydac.com.au
 Internet: hydac.com.au
BELGIUM
 HYDAC A.S./N.V.
 Overhaemlaan 33
3700 Tongeren
 Tel.: +32 12 / 26 04 00
 Fax: +32 12 / 26 04 09
BULGARIA
 HYDAC EOOD
 ZK Druzha 1
 Amredam 9
1592 Sofia
 Tel.: +359 2 / 9706070
 Fax: +359 2 / 9706075
 E-mail: office@hydac.bg
 Internet: www.hydac.bg
BRAZIL
 HYDAC Tecnologia Ltda.
 Estrada Fukutaro Yida, 225
 Bairro Cooperativa, 09852-060
Sao Bernardo do Campo
 São Paulo
 Tel.: +55 11 / 43 93 66 00
 Fax: +55 11 / 43 93 66 17
 E-mail: hydac@hydac.com.br
 Internet: www.hydac.com.br
BELARUS
 HYDAC Belarus
 ul. Timirjazeva 65a, Biura 504-505
220035 Minsk
 Tel.: +375 17 375 51 32
 Fax: +375 17 375 51 35
 E-Mail: info@hydac.com.by
 Internet: www.hydac.com.by
CANADA
 HYDAC Corporation
 14 Federal Road
Welland, Ontario
 L3B 3P2
 Tel.: +1 905 / 714 93 22
 Fax: +1 905 / 714 46 64
 E-mail: sales@hydac.ca
 Internet: www.hydac.ca

CH CL CN CZ DK EG ES FI FR GB GR HU ID

SWITZERLAND
 HYDAC Engineering AG
 Allmendstr. 11
6312 Steinhausen/Zug
 Tel.: +41 41 / 747 03 21
 Fax: +41 41 / 747 03 29
 E-mail: hydac-engineering-AG@hydac.com
 Internet: www.hydac.ch
 HYDAC S.A.
 Zona Industriale 3, Via Scerera
6805 Mezzovico
 Tel.: +41 91 / 935 57 00
 Fax: +41 91 / 935 57 01
 E-mail: info.coolingsystems@hydac.ch
 Internet: www.hydac.ch
CHILE
 HYDAC Tecnologia Chile Ltda.
 Las Araucarias 9080-9110 / módulo F
 Parque Industrial Las Araucarias
8720041 Quilicura / Santiago
 Tel.: +56 2 / 5 84 67 54
 Fax: +56 2 / 5 84 67 55
 E-mail: guillermo.viertel@hydac.com
CHINA
 HYDAC Technology (Shanghai) Ltd.
 271 Luchun Road
 Shanghai Minhang
 Economic & Technological Development Zone
Shanghai 200245
 Tel.: +86 21 / 64 63 35 10
 Fax: +86 21 / 64 30 02 57
 E-mail: hydacsh@hydac.com.cn
CZECH REPUBLIC
 HYDAC spol. S.R.O.
 Kanadská 794
391 11 Planá nad Lužnicí
 Tel.: +420 381 / 20 17 11
 Fax: +420 381 / 29 12 70
 E-mail: hydac@hydac.cz
 Internet: www.hydac.cz
DENMARK
 HYDAC A/S
 Hævetoftevej 5
5550 Langeskov
 Tel.: +45 70 27 02 99
 Fax: +45 63 13 25 40
 E-mail: hydac@hydac.dk
EGYPT
 Yasser Fahmy Hydraulic Eng.
 65-66-68 Saudi Building, Kobbba
 P.O. Box 6550 Sawah 11813
Cairo
 Tel.: +202 (2) / 4520192, 4530922
 Fax: +202 (2) / 4530638
 E-mail: yasserf@yf-hydraulic.com.eg
SPAIN
 HYDAC Technology SL
 C/ Solsones
 54 - Pol. Ind. Pla de la Bruguera
 08211 Castellat del Valles
 Tel.: +34 93 / 747 36 09
 Fax: +34 93 / 715 95 42
 E-mail: a.masoliver@hydac.es
FINLAND
 (Estonia)
 HYDAC OY
 Kisällintie 5
01730 Vantaa
 Tel.: +358 10 773 7100
 Fax: +358 10 773 7120
 E-mail: hydac@hydac.fi
 Internet: www.hydac.fi
FRANCE
 HYDAC S.à.r.l.
 Technopôle Forbach Sud
 B.P. 30260
57604 Forbach Cedex
 Tel.: +33 3 / 87 29 26 00
 Fax: +33 3 / 87 85 90 81
 E-mail: hydac_france@hydac.com
 Agence de Paris
 Tel.: +33 1 / 60 13 97 26
 Agence de Lyon
 Tel.: +33 4 / 78 87 83 02
 Agence de Bordeaux
 Tel.: +33 5 / 57 54 26 25
 Agence de Martignes
 Tel.: +33 4 / 42 49 61 35
 Agence Centre-Est
 Tel.: +33 3 / 81 63 01 65
GREAT BRITAIN
 HYDAC Technology Limited
 De Havilland Way, Windrush Park
Witney, Oxfordshire
 OX29 0YG
 Tel.: +44 1993 86 63 66
 Fax: +44 1993 86 63 65
 E-mail: info@hydac.co.uk
 Internet: www.hydac.co.uk
GREECE
 38, Amfipoleos Str.
11555 Athens
 Tel.: +30 210 341 0181
 Fax: +30 210 341 0183
 E-mail: info@delta-p.gr
HONG KONG
 HYDAC Technology (Hongkong) Ltd.
 Room 602, 6/F, Silvercord Tower 1
 30 Canton Road, Tsim Sha Tsui
Kowloon, Hong Kong
 Tel.: +852 23 69 35 68
 Fax: +852 23 69 35 67
HUNGARY
 HYDAC Hidraulika és Szűrés technika Kft.
 Ezred u. 16
1044 Budapest
 Tel.: +36 1 359 93 59
 Fax: +36 1 239 73 02
 E-mail: hydac@hydac.hu
 Internet: www.hydac.hu
INDONESIA
 PT HYDAC Technology Indonesia PMA
 Komplek Pergudangan T8 No.27-29
 Alam Sutera - Serpong
Tangerang Selatan 15325
 Tel.: +62 21 2921 1671 / 2921 1672
 Fax: +62 21 2921 1653
 E-mail: info@hydac.co.id
 Internet: www.hydac.co.id

IN IT JP KR LU MX MY NL NO NZ PL PT RO RU


INDIA
 HYDAC INDIA PVT. LTD.
 A-58 TTC Industrial Area, MIDC, Mahape
Navi Mumbai 400 701
 Tel.: +91 22 / 411 18-888
 Fax: +91 22 / 2778 11 80
 E-mail: info@hydacindia.com
ITALY
 HYDAC S.p.A.
 Via Archimede 76
20864 Agrate Brianza (MB)
 Tel.: +39 039 / 64 22 11
 Fax: +39 039 / 68 99 682
 E-mail: hydac@hydac.it
 Internet: www.hydac.it
JAPAN
 HYDAC CO. LTD.
 Daiwa Hatchobori Ekimae Bldg. 2F
 3-25-7 Hatchobori, Chuo-ku
Tokyo 104-0032
 Tel.: +81 3 / 35 37-3620
 Fax: +81 3 / 35 37-3622
 E-mail: sales@hydac.co.jp
KOREA
 HYDAC Korea Co. Ltd.
 6th floor Daewon Bldg.
 175 Bangbae Jungang-ro, Seocho-gu
Seoul 137-829
 Tel.: +82 2 / 591 09 31
 Fax: +82 2 / 5911 09 32
 E-mail: info@hydackorea.co.kr
LUXEMBURG
 Friederich-Hydrotech S.à.r.l.
 16 Route d'Esch
3835 Schifflange
 Tel.: +352 54 52 44
 Fax: +352 54 52 48
MEXICO
 HYDAC International SA de CV
 Calle Alfredo A. Nobel No. 35
 Colonia Puente de Vigas
Tlalneapantla
 Edo. De México, CP 54090
 Tel.: +52 55 4177 1272 al 65
 Fax: +52 55 5390 2334
 Internet: www.hydacmex.com
MALAYSIA
 HYDAC Technology Snd. Bhd.
 Lot 830, Kawasan Perindustrian Kampung Jaya,
 Jalan Kusta,
 47000 Sungai Buloh
Selangor Darul Ehsan
 Tel.: +60 3 / 6157 0250
 Fax: +60 3 / 6157 0252
NETHERLANDS
 HYDAC B.V.
 Vossenbeemd 109
5705 CL Helmond
 Tel.: +31 (0)88 0597 001
 Fax: +31 (0)88 0597 020
 E-mail: info@hydac.nl
NORWAY
 HYDAC AS
 Berghagan 4
1405 Langhus
 Tel.: +47 64 85 86 00
 Fax: +47 64 85 86 01
 E-mail: firmapost@hydac.no
NEW ZEALAND
 HYDAC LTD.
 108A Pentecost Road
 Mount Wellington 1060
Auckland
 Tel.: +64 9271 4120
 Fax: +64 9271 4124
 E-mail: info@hydac.co.nz
 Internet: www.hydac.co.nz
POLAND
 (Latvia, Lithuania)
 HYDAC SP Z O.O.
 ul. Reymonta 12
43-190 Mikolow
 Tel.: +48 32 / 226 26 55, 326 01 10
 Fax: +48 32 / 226 40 42
 E-mail: info@hydac.com.pl
 Internet: www.hydac.com.pl
PORTUGAL
 HYDAC TECNOLOGIA, UNIPessoal,
 LDA.
 Centro Empresarial do Castelo da Maia
 Rua Manuel Assunção falcão, 501
4475-041 Maia
 Tel.: +351 223 160 364
 Fax: +351 223 160 265
 E-mail: info@hydac.pt
 Internet: www.hydac.com
ROMANIA
 HYDAC SRL
 12 Soseaua Vestului Street, Et 2
100298, Ploiesti, Prahova county
 Prahova county
 Tel.: +40 244 575 778
 Fax: +40 244 575 779
 E-mail: hydac@hydac.ro
 Internet: www.hydac.ro
RUSSIA
 HYDAC International
 ul. 4, Magistralnaya 5, office 31
123007 Moscow
 Tel.: +7 495 / 980 80 01
 Fax: +7 495 / 980 70 20
 E-mail: info@hydac.com.ru
 Internet: www.hydac.com.ru

SE SG SI SK TH TR TW UA US VN ZA

RUSSIA
 Technical Office St. Petersburg
 Nab. Obvodnogo kanala 138
190020 St. Petersburg
 Tel.: +7 812 / 495 9462
 Fax: +7 812 / 495 9463
 E-mail: petersb@hydac.com.ru
 Technical Office Novokuznetsk
 ul. Niewskogo 1, office 300
654079 Novokuznetsk
 Tel.: +7 3843 99 1346
 Fax: +7 3843 99 1345
 E-mail: novokuz@hydac.com.ru
 Technical Office Ulyanovsk
 ul. Eferemova 29, office 418
432042 Ulyanovsk
 Tel.: +7 8422 61 3453
 Fax: +7 8422 61 3452
 E-mail: uljan@hydac.com.ru
SWEDEN
 HYDAC Fluidteknik AB
 Domnarvsgatan 29
16353 Spånga
 Tel.: +46 8 / 445 29 70
 Fax: +46 8 / 445 29 90
 E-mail: hydac@hydac.se
 Internet: www.hydac.se
SINGAPORE
 HYDAC Technology Pte Ltd.
 7 Tuas Avenue 8
Singapore 639222
 Tel.: +65 67 41 74 58
 Fax: +65 67 41 04 34
 E-mail: sales@hydac.com.sg
 Internet: www.hydac.com.sg
SLOVENIA
 HYDAC d.o.o.
 Tržaška Cesta 39
2000 Maribor
 Tel.: +386 2 / 460 15 20
 Fax: +386 2 / 460 15 22
 E-mail: info@hydac.si
 Internet: www.hydac.si
SLOVAKIA
 HYDAC S. R. O.
 Gorkého 4
036 01 Martin
 Tel.: +421 43 / 413 58 93, 423 73 94,
 422 08 75
 Fax: +421 43 / 422 08 74
 E-mail: hydac@hydac.sk
 Internet: www.hydac.sk
THAILAND
 AEROFUID CO. LTD.
 169/4, 169/5, Moo 1
 Rangsit-Nakhonnayok Rd.
Patumthanee 12110
 Tel.: +66 2 / 577 2999
 Fax: +66 2 / 577 2700
 E-mail: info@aerofuid.com
TURKEY
 HYDAC AKIŞKAN KONTROL
 SİSTEMLERİ SAN. VE TİC. LTD. ŞTİ.
 Namık Kemal Mahallesi
 Adile Naşit Bulvanı, 174 Sok. No. 9
34513 Esenyurt - Istanbul
 Tel.: +90 212 / 428 25 25
 Fax: +90 212 / 428 70 37
 E-mail: info@hydac.com.tr
 Internet: www.hydac.com.tr
TAIWAN
 HYDAC Technology Ltd.
 No. 18, Shude 1st Lane, South District
Tai Chung City 40242
 Tel.: +886 4 / 2260 2278
 Fax: +886 4 / 2260 2352
 E-mail: sales@hydac.com.tw
 Internet: www.hydac.com.tw
UKRAINE
 HYDAC Kiev
 ul. Novokonstantinovskaya 9
Korpus 13, 2 Etage
04080 Kiev
 Tel.: +38 044 / 495 33 96, 495 33 97
 Fax: +38 044 / 495 33 98
 E-mail: info@hydac.com.ua
 Internet: www.hydac.com.ua
USA
 HYDAC Technology Corporation
 HYDAC Corp.
 2260 & 2280 City Line Road
Bethlehem, PA 18017
 Tel.: +1 610 / 266 01 00
 Fax: +1 610 / 266 35 40
 E-mail: sales@hydacusa.com
 Internet: www.hydac-na.com
VIETNAM
 HYDAC International
 E-Town Building, Mezzanine Floor
 Executive office, Room 7
 364 Cong Hoa Street, Tan Binh District
Ho Chi Minh City
 Tel.: +84 88 120 545 Ext. 215
 Fax: +84 88 120 546
SOUTH AFRICA
 (Namibia, Zimbabwe)
 HYDAC Technology Pty Ltd.
 165 Van der Bijl Street
Edevalde 1614, Johannesburg
 Tel.: +27 11 / 723 90 80
 Fax: +27 11 / 453 72 37
 E-mail: hydacza@hydac.com



Accumulators 30.000



Fluid Filters 70.000



Process Technology 77.000



Filter Systems 79.000



Compact Hydraulics 53.000



Accessories 61.000




Electronics 180.000



Cooling Systems 57.000

Global Presence. Local Expertise. www.hydac.com

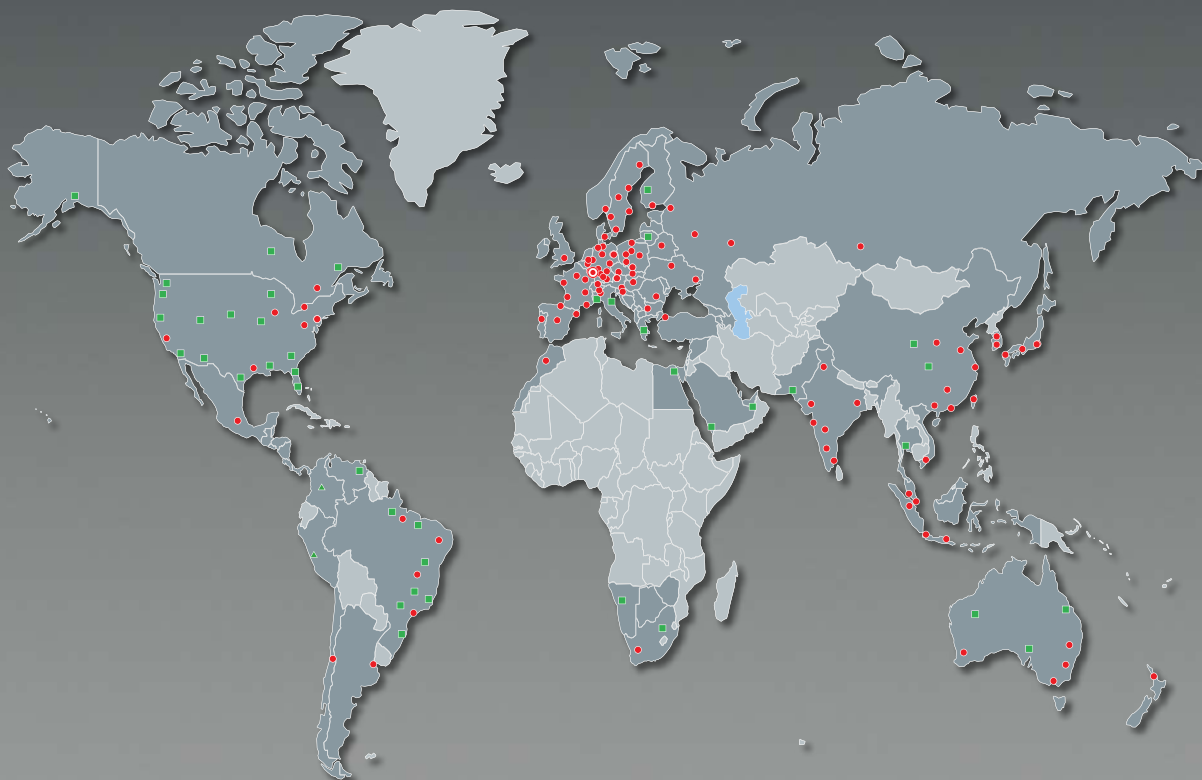

-  HYDAC Headquarters
-  HYDAC Companies
-  HYDAC Sales and Service Partners
-  Free Sales Partners

HYDAC TECHNOLOGY

HYDAC TECHNOLOGY
GMBH

Industriegebiet
66280 Sulzbach/Saar
Germany

Phone
+49 6897 509-01

Fax:
+49 6897 509-454

Internet: www.hydac.com
E-mail: speichertechnik@hydac.com

